
chanhvinh.com

Expertise – Passion – Automation

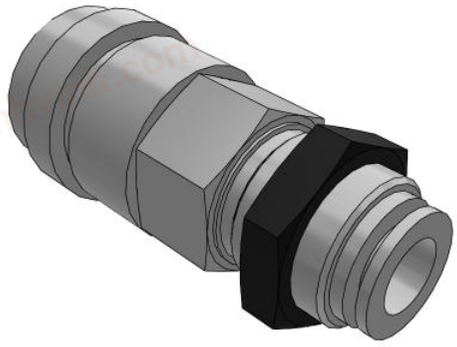

KK*S-*E, S-Couplers, Bulkhead Type with One-touch Fitting

KK4S-10E

Datasheet

General series information

- Bulkhead Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.: ø3.2, ø4, ø6, ø8, ø10, ø12, ø16.

Standard specifications


Body Size	4 (1/4)
Applicable Tubing O.D.	Ø10 mm
Pressure medium	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Maximum ambient temperature	60 °C / 40 °C for Water
Minimum ambient temperature	-5 °C (with no freezing) / 5 °C for Water
Effective Area	39 mm²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.084 Kg


Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.


SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Dimensions

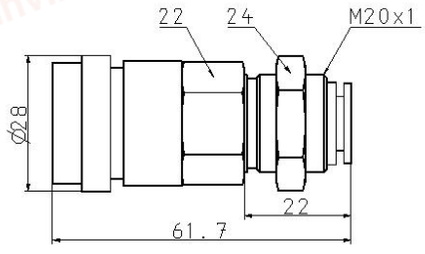



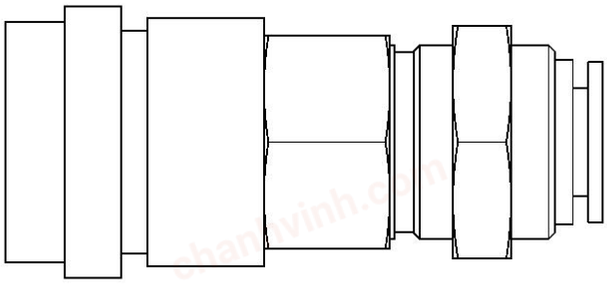

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es

chanhvinh.com

Additional information

Catalogue KK-C_EU.pdf

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

SMC CORPORATION Zuazobidea 14, 01012, Vitoria-Gasteiz, Álava +34 945184100 +34 945184126 www.smc.eu emcmarketing@smc.smces.es