chanhvinh.com



Fuse bases

Fuse protection

for NH industrial and high-speed (uR) fuses from 160 to 2500 A



Base
Size 1



Base
IP2X

The solution for

- Motor feeders
- Protection of industrial cabinet



Strong points

- High level of electrical safety
- Fuse blown indicator
- Various mounting options

Compliance with standards

- IEC 60269-1
- IEC 60269-2
- IEC 60269-2,-1
- NF EN 60269-1
- NF C 63211
- VDE 0636-10
- DIN 43620

Function

SOCOMEC **fuse bases** are unipolar or multipolar supports for knife-edge fuses.

Advantages

High level of electrical safety

- High dielectric strength.
- IP2X protection (standard or optional depending on models).

High breaking capacity

Protection against overloads and short-circuits thanks to high breaking capacity fuses (100 kA rms).


Fuse blown indicator

When used with striker fuses, the fuse blown indication is possible thanks to an auxiliary contact.

Various mounting options

DIN rail or back plate mounting (depending on models).

Functional diagram

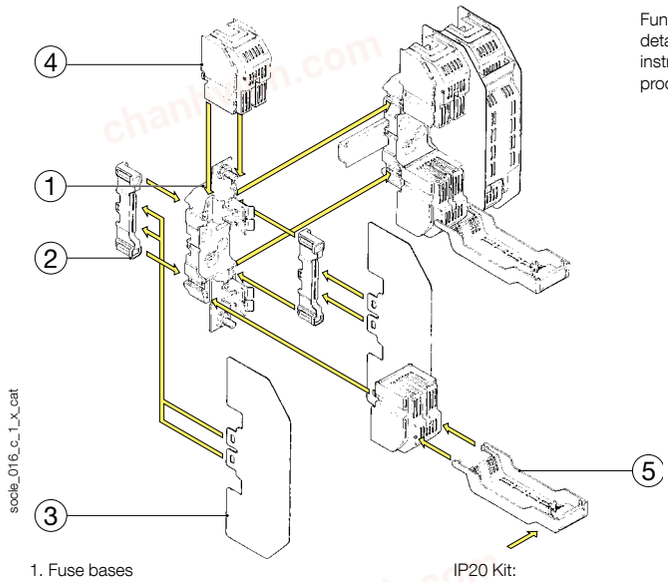

Functional diagram (for further details see the installation instructions supplied with the product)

1. Fuse bases
2. Connecting block:
   - block for assembling unipolar bases T00, T0, T1, T2 and T3
   - support for interphase barriers T00, T0, T1, T2 and T3
3. Phase separation shield
4. Terminal shrouds (necessary for mounting fuse covers)
5. Fuse cover (provides IP2 protection for any brand of fuse)

IP20 Kit:
- unipolar = 2 connecting blocks + 2 phase separation shields + 2 terminal shrouds + 1 fuse cover
- tripolar = 2 connecting blocks (for the ends) + 2 phase separation shields for the ends + 6 terminal shrouds + 3 fuse covers.

socomec Innovative Power Solutions

chanhvinh.com

References


Fuse bases for fuses without a striker from 160 to 630 A (U = 690 V)

Rating Fuse size		160 A 00	160 A 0	250 A 1	400 A 2	630 A 3
Back plate mounted device						
No. of poles	**To be ordered in multiples of**	**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
1 P	3	6500 **1010**	6501 **1010**	6501 **1011**	6501 **1012**	6501 **1013**
3 P	1	6500 **1030**	6501 **1030**	6501 **1031**	6501 **1032**	6501 **1033**
DIN rail-mounted device						
No. of poles	**To be ordered in multiples of**	**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
1 P	3	6500 **1110**	6501 **1110**	6501 **1111**	6501 **1112**	6501 **1113**
3 P	1	6500 **1130**	6501 **1130**	6501 **1131**	6501 **1132**	6501 **1133**
Options: IP20 kit						
No. of poles		**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
1 P (1)		6510 **1010**	6511 **1010**	6511 **1011**	6511 **1012**	6511 **1013**
3 P (2)		6510 **1030**	6511 **1030**	6511 **1031**	6511 **1032**	6511 **1033**
Accessories						
Description of accessories	**To be ordered in multiples of**	**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
Connecting block - set of 1 piece	2	6500 **0033**	6500 **0030**	6500 **0031**	6500 **0031**	6500 **0032**
Phase separation shield - set of 1 piece	2	6500 **0001**	6500 **0002**	6500 **0003**	6500 **0003**	6500 **0004**
Terminal shrouds - set of 1 piece	6	6500 **0010**	6500 **0011**	6500 **0012**	6500 **0013**	6500 **0014**
Fuse cover - set of 1 piece	3	6500 **0020**	6500 **0021**	6500 **0022**	6500 **0022**	6500 **0023**


(1) IP20 unipolar kit comprises - 2 connecting blocks, 2 phase separation shields, 2 terminal shrouds and 1 fuse cover.
(2) IP20 tripolar kit comprises - 2 connecting blocks for the ends, 2 phase separation shields for the ends, 6 terminal shrouds and 3 fuse covers.

Dimensions

160 A fuse base, size 00

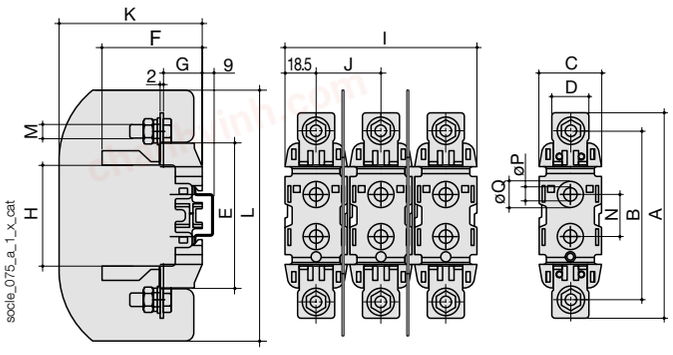

160 to 630 A fuse base, sizes 0, 1, 2 and 3

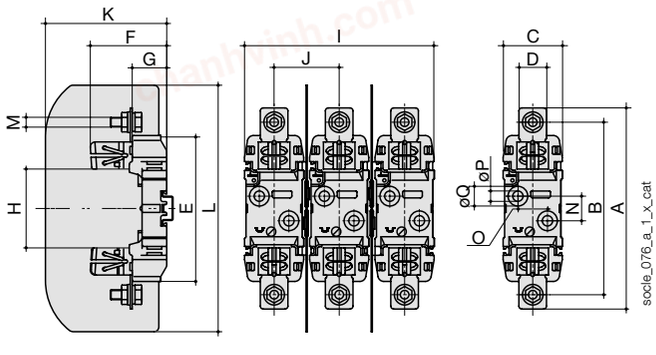

Rating (A)	Fuse size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
160	00	122	100	37	22	86	59.5	23	57	114	38.5	85	146	M8	25	-	8	15
160	0	170	150	47	24	122	63	29	74	144	48.5	91.5	185	8	25	-	7.5	15
250	1	200	175	60	28	148	77.5	35	80	192	66	123	250	10	25	30	10.5	20.5
400	2	225	200	60	32	148	88	35	80	192	66	123	250	12	25	30	10.5	20.5
630	3	240	210	60	38	148	97	35	80	224	82	143	270	12	25	30	10.5	20.5

chanhvinh.com

Fuse bases

Fuse protection

for NH industrial and high-speed (uR) fuses from 160 to 2500 A


References

Unipolar fuse bases for fuses with a striker from 160 to 630 A (U = 690 V)

Rating Fuse size	160 A 0	250 A 1	400 A 2	630 A 3
Back plate mounted device without AC				
No. of poles	**Reference**	**Reference**	**Reference**	**Reference**
1 P	6501 **1010**	6501 **1011**	6501 **1012**	6501 **1013**
DIN rail-mounted device without AC				
No. of poles	**Reference**	**Reference**	**Reference**	**Reference**
1 P	6501 **1110**	6501 **1111**	6501 **1112**	6501 **1113**
Accessories				
Presence and fuse blown signalling AC (DDMM)				
No. of poles	**Reference**	**Reference**	**Reference**	**Reference**
1 P	6500 **0040**	6500 **0041**	6500 **0042**	6500 **0043**
Characteristics				
NO/NC contact				
Nominal current I_n (A) 250 VAC	16	16	16	16

Dimensions

160 to 630 A fuse base, sizes 0, 1, 2 and 3

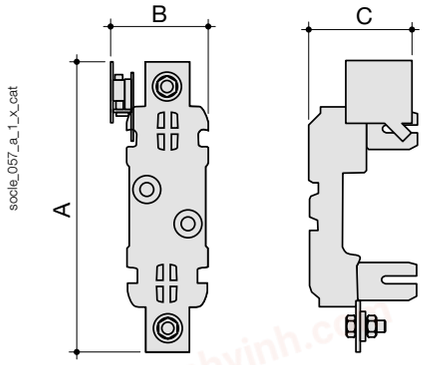

Rating (A)	Fuse size	A	B	C
160	0	193	65.5	90
250	1	215	76	98
400	2	227	76	102
630	3	235	76	102

chanhvinh.com

References


Multipolar fuse bases for fuses with a striker from 160 to 400 A (U = 690 V)

Rating Fuse size	160 A 0	250 A 1	400 A 2
Back plate mounted device with presence and fuse blown signalling AC (DDMM)			
No. of poles	**Reference**	**Reference**	**Reference**
2 P	6301 **2016**	6301 **2024**	6301 **2039**
3 P	6301 **3016**	6301 **3024**	6301 **3039**
4 P	6301 **4016**	6301 **4024**	6301 **4039**
Auxiliary contacts for fuse blown indication			
AC position	**Reference**	**Reference**	**Reference**
1st AC	included	included	included
2nd	3994 **1901**	3994 **1901**	3994 **1901**
Terminal shrouds (1 piece)			
No. of poles	**Reference**	**Reference**	**Reference**
2 P	3998 **2016**	3998 **2025**	3998 **2025**
3 P	3998 **3016**	3998 **3025**	3998 **3025**
4 P	3998 **4016**	3998 **4025**	3998 **4025**

Dimensions

160 to 400 A fuse base, size 0

socle_044_a_1_x_cat

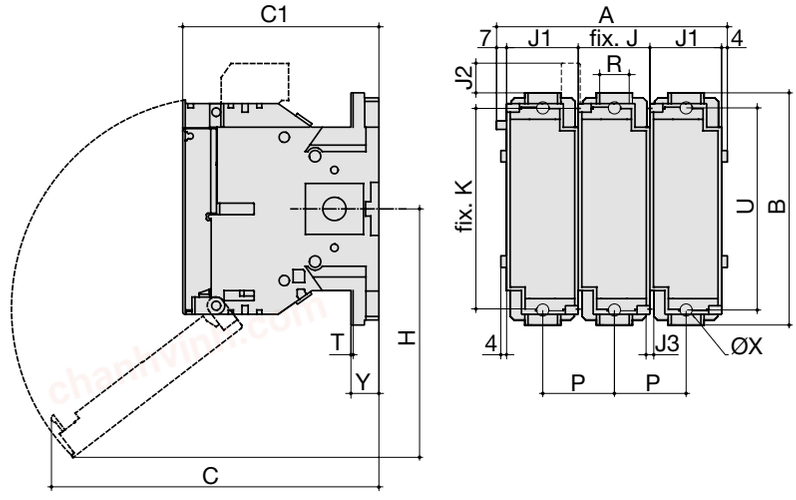

Rating (A)	Fuse size	A 2 p.	A 3 p.	A 4 p.	B	C	C1	H	J	J1	J2	J3	K	P	R	T	U	ØX	Y
160	0	111	161	211	162	229	136.5	174	50	60	20.5	5.4	140	50	20	2.5	141	8.5	19.5
250	1	131	191	251	195	251	146	185	60	60	7.5	6.4	162	60	32	2.5	166	11	19.5
400	2	143	209	275	205	260	149	200	66	66	2.5	6.4	172	66	50	3	175	11	20

Fuse bases

Fuse protection

for NH industrial and high-speed (uR) fuses from 160 to 2500 A

References


Fuse bases for fuses with or without a striker from 1000 to 2500 A (U = 690 V)

Rating (A) Fuse size	1 000 A 4	1 250 A 4	2500 A 2 x 4	2 500 A 2 x 4 (S)	2 500 A 6 (for neutral)
Device without presence and fuse blown signalling (DDMM)					
No. of poles	**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
1 P	6431 **0004**	6431 **0005**	6431 **0006**		6431 **0007**(1)
Device with presence and fuse blown signalling (DDMM)					
No. of poles	**Reference**	**Reference**	**Reference**	**Reference**	**Reference**
1 P	7304 **0001**	7305 **0001**	7306 **0001**	6433 **0005**	

(1) Without solid neutral link.


Dimensions

1000 to 1250 A fuse base, size 4

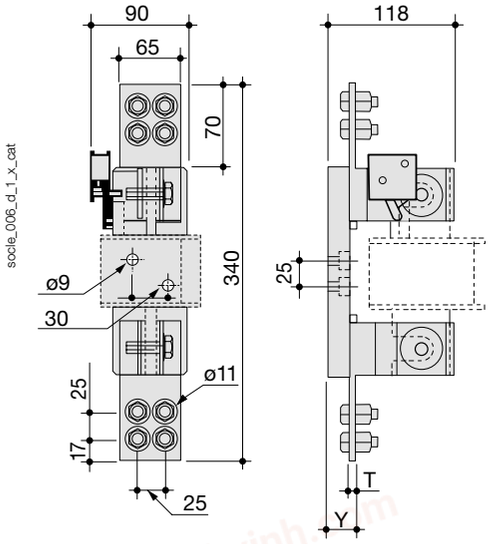


Rating (A)	Y (mm)	T (mm)
1000	25	4
1250	30	9

2500 A fuse base, size 2 X 4

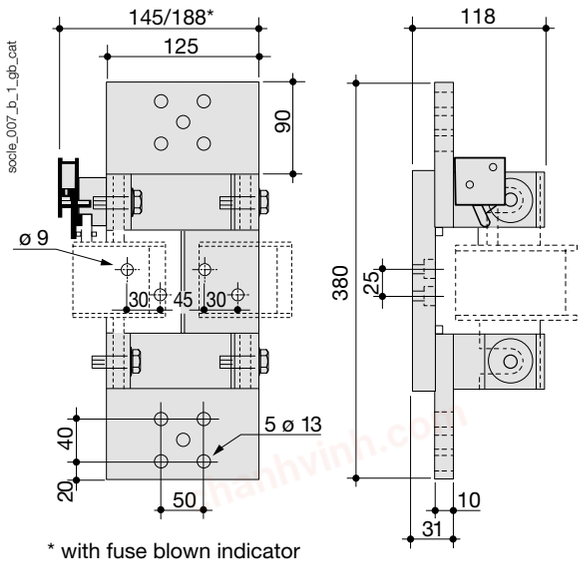


* with fuse blown indicator

2500 A fuse base, 2 x 4 (S)

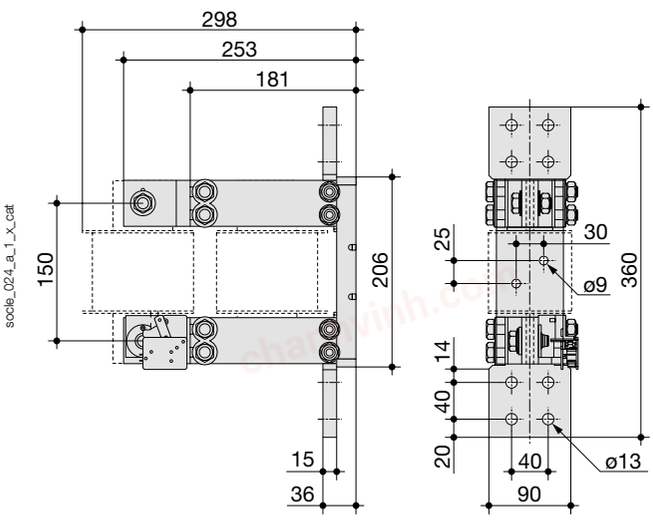

2500 A fuse base, size 6 (for neutral)

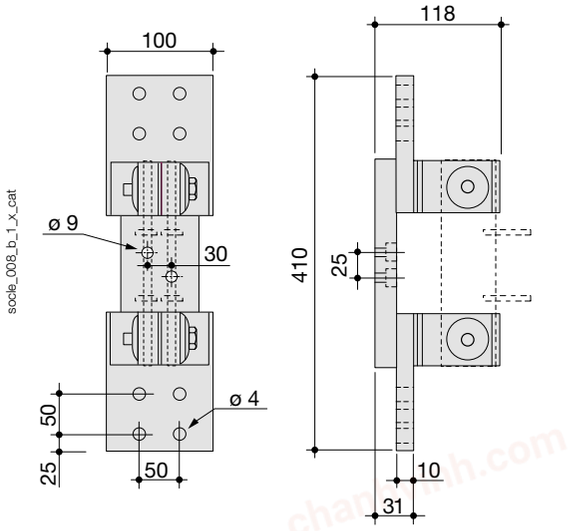

socomec Innovative Power Solutions

chanhvinh.com

References


Unipolar fuse bases for UR fuses

		1000 VAC	1400 VAC
L shaped bracket /80 (distance between centres 80)			
Thermal current I_{th} at 40°C	**Type of fuse**	**Reference**	**Reference**
400	0000 … 00 bolted connection	170H **1007**	
Knife-edge fuses /80 (distance between centres 80)			
Thermal current I_{th} at 40°C	**Type of fuse**	**Reference**	**Reference**
1250(1)	1* … 3	170H **3004**	
Knife-edge fuses /110 (distance between centres 110)			
Thermal current I_{th} at 40°C	**Type of fuse**	**Reference**	**Reference**
1250(1)	1* … 3		170H **3006**


(1) For currents > 1250 A, please consult us.

Dimensions

Bracket /80 - 400 A - 1000 VAC
Ref.: 170H 1007

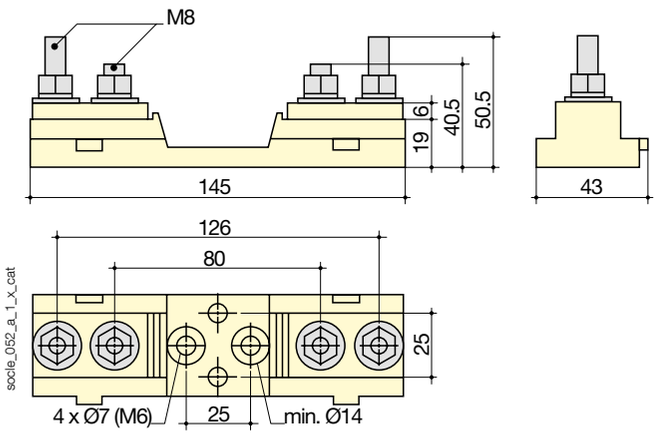

Knife-edge /80 - 1250 A - 1000 VAC
Ref.: 170H 3004

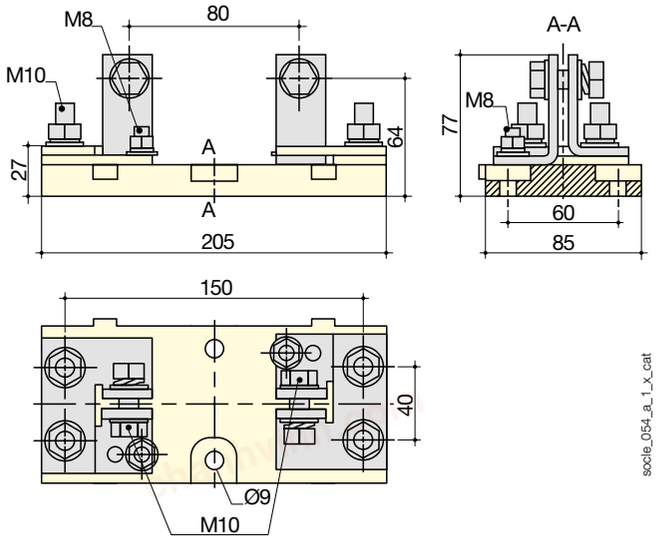

Knife-edge /110 - 1250 A - 1400 VAC - Ref: 170H 3006

