chanhvinh.com



64 Push-to-Close Latch

Pull-to-open · Paddle latch · Miniature

- **Single hole installation**
- **Concealed mounting**
- **Plastic slide**

Material and Finish

Stainless steel, passivated and brushed finish and glass-filled reinforced nylon, black

Performance Details


Max. working load: 90 N (20 lbf)


Operating temperature range: -18°C (0°F) to 100°C (210°F)


Flammability rating: UL94-V0

Installation Notes

Maximum tightening torque on mounting screws: 0.9 N·m (8 in·lbf)

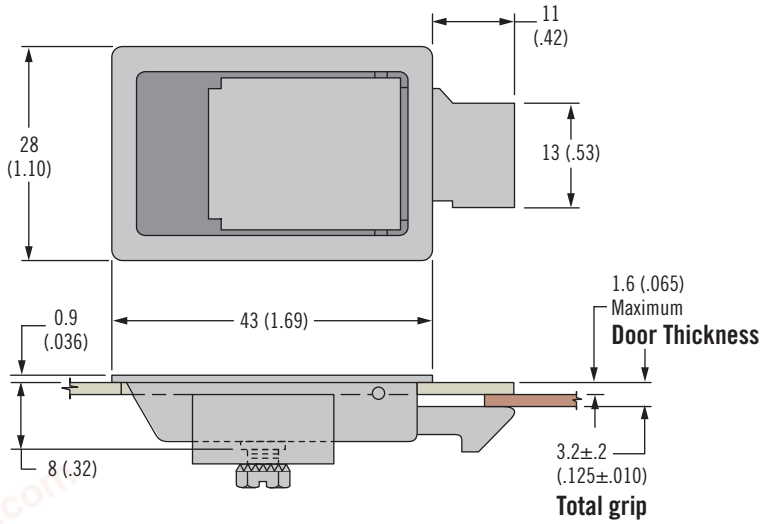

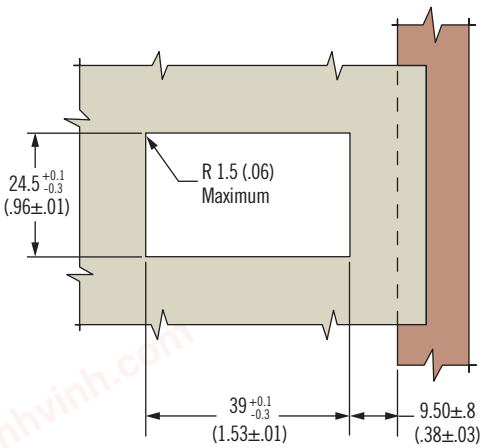

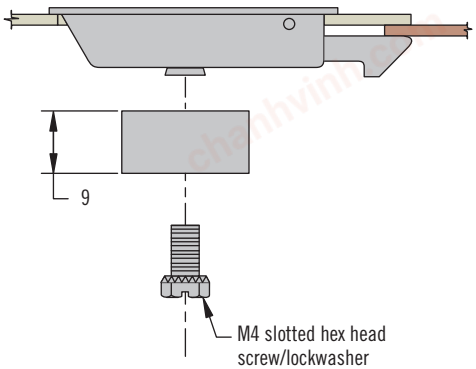

Part Number

See table

Part Number
64-01-10


Dimensions in millimeters (inch) unless otherwise stated


southco®


chanhvinh.com


64 Push-to-Close Latch

Pull-to-open · Paddle latch · Small



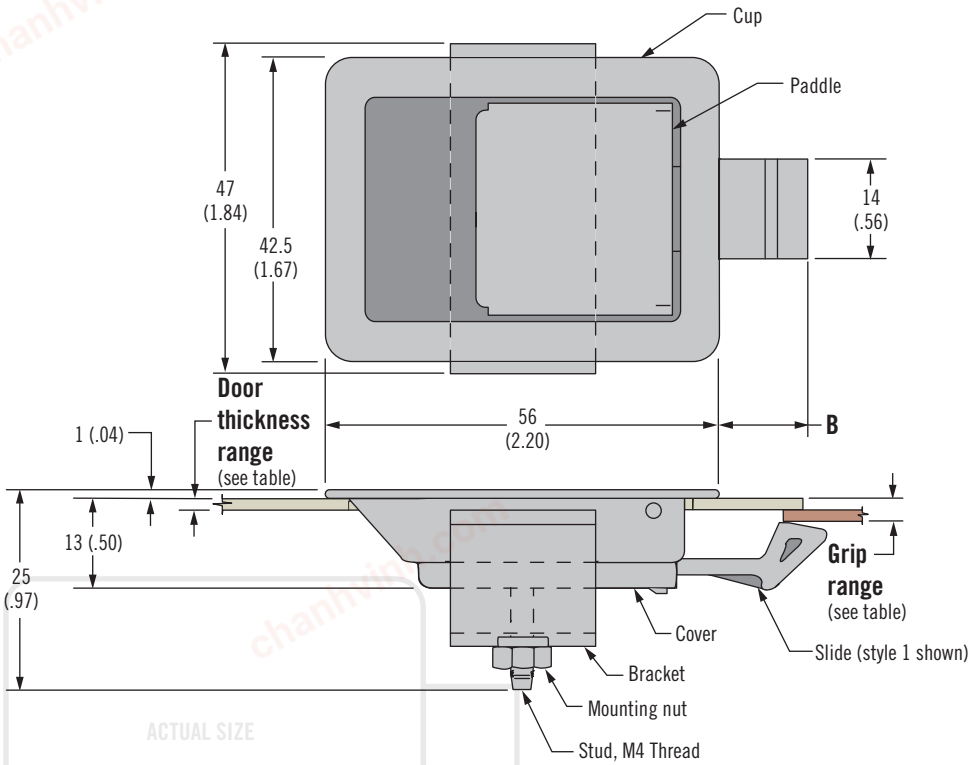

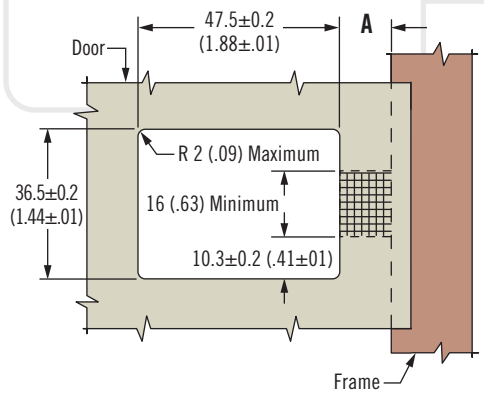

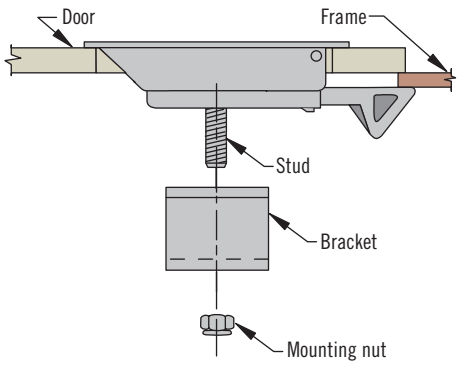

Grip Range		Slide Style	A		B	T (See Notes)	Part Number Brushed Finish			
							Door Thickness Range			
Min.	Max.		Min.	Max.			3.7 (.144) Maximum	3.9 - 7.3 (.154 - .288)	11.1 - 14.6 (.437 - .576)	18.6 - 22 (.734 - .868)
1.2 (.05)	2 (.08)	1	10.4 (.41)	12.7 (.50)	12.4 (.49)	1.6 (.063)	64-10-111-50	~	~	~
2.8 (.11)	3.6 (.14)	3	11.9 (.47)	14.2 (.56)	14.2 (.56)	3.2 (.125)	64-10-113-50	64-10-133-50	~	~
6 (.23)	6.7 (.27)	4				6.4 (.250)	64-10-124-50	64-10-114-50	~	~
12.3 (.48)	13.1 (.52)	5				7.1 (.281)	64-10-125-50	64-10-135-50	64-10-115-50	64-10-115-50
18.6 (.73)	19.4 (.77)	6				7.1 (.281)	64-10-126-50	~	64-10-116-50	64-10-116-50

- **Single hole installation**
- **Concealed mounting**
- **Plastic slide**

Material and Finish

Stainless steel, passivated and brushed or black powder coated and glass-filled reinforced nylon, natural

Performance Details

Max. working load:

Style	Max. Static Load N
1	130 (30)
2	110 (25)
3	90 (20)
4	70 (15)
5	55 (12)

Operating temperature range: -18°C (0°F) to 100°C (210°F)

Flammability rating: UL94-V0

Installation Notes

Door thickness must not exceed **T** dimension (see table) in area through which slide will operate. It may be necessary to reduce thickness of door in area indicated by grid.

Slide styles:

Style 3



Style 4



Style 5




Style 6



Notes

For an assembly with black powder coated finish change last digit from 0 to 5 - Example: 64-10-111-55

chanhvinh.com



64 Push-to-Close Latch

Pull-to-open · Paddle latch · Small


- Single hole installation
- Concealed mounting
- Metal slide


Material and Finish


Stainless steel passivated and brushed or black powder coated, steel, chrome plated

Performance Details

Max. working load: 222 N (50 lbf)

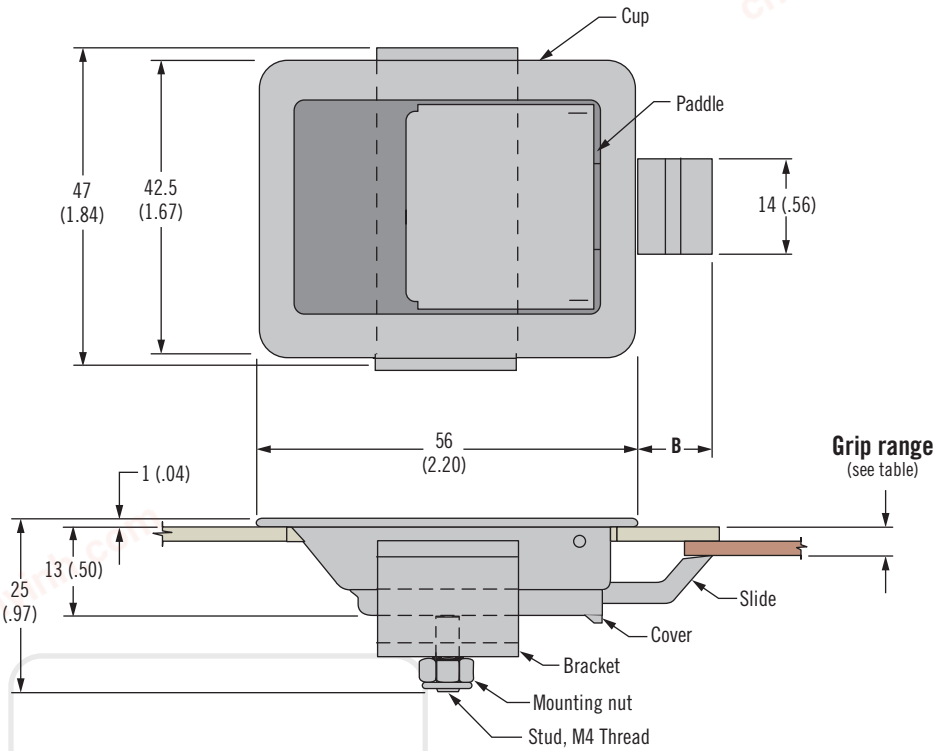

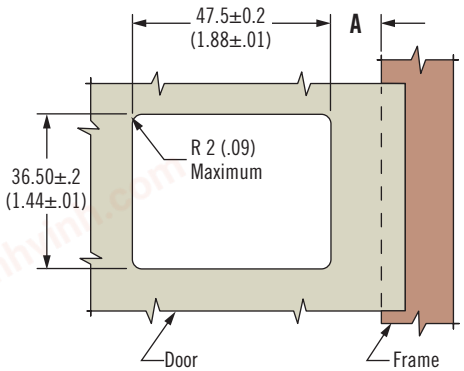

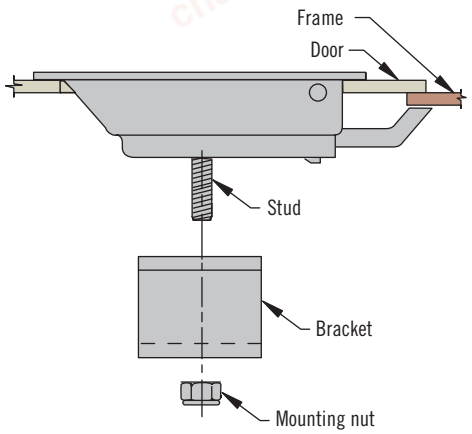

Grip Range		Part Number		A		B
Min.	Max.	Stainless Steel, Brushed	Stainless Steel Black Powder coated	Min.	Max.	
1.2 (.05)	2 (.08)	64-11-10	64-11-12	10.4 (.41)	12.7 (.50)	11.5 (.45)
2 (.08)	2.8 (.11)	64-11-20	64-11-22	11.2 (.44)	13.5 (.53)	11.9 (.47)
2.8 (.11)	3.6 (.14)	64-11-30	64-11-32	11.9 (.47)	14.2 (.56)	12 (.48)

Part Number


See table


Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com


64 Push-to-Close Latch

Pull-to-open · Paddle latch · Medium



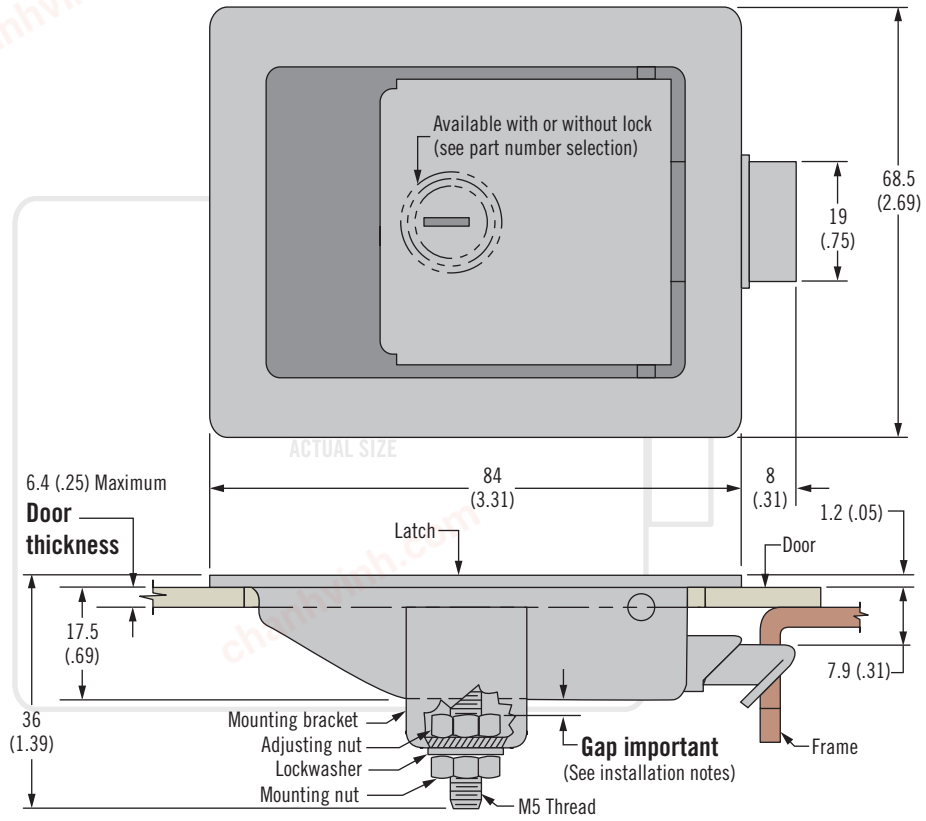

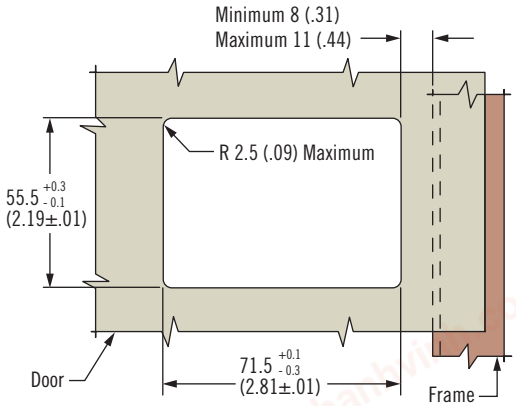

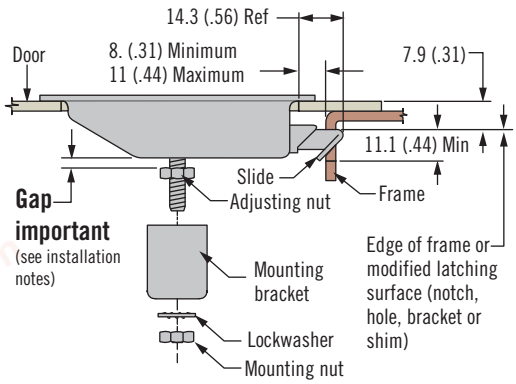

- **Single hole installation**
- **Concealed mounting**
- **Metal slide**

Material and Finish

Stainless steel brushed, steel, zinc plated or steel, black powder coated or silver

Performance Details

Max. working load: 570 N (125 lbf)

Installation Notes

Measure your door thickness and set adjusting nut so that GAP is equal to door thickness within plus 0.8 (.03), minus 0.0. (.00)

Accessories

Flat key, keyed alike H571
(2 keys per ring)
Part number: 64-0-33578

Part Number Selection

64 - 2 L - 1 M

L Lock style
- **1** Non-locking
- **2** Key-locking keyed alike H571 (2 Flat keys supplied)

M Material
- **0** Stainless steel, brushed
- **1** Steel, black powder coated
- **3** Steel, zinc plated
- **5** Steel, powder coated silver

chanhvinh.com



64 Push-to-Close Latch

Pull-to-open · Paddle latch · Large

- **Single hole installation**
- **Concealed mounting**
- **Metal slide**

Material and Finish

Stainless steel, brushed, steel, zinc plated or steel, black powder coated

Performance Details

Max. working load: 1110 N (250 lbf)

Installation Notes

Measure your door thickness and set adjusting nut so that GAP is equal to door thickness within plus 0.8 (.03), minus 0.0 (.00)


Accessories


Flat key, keyed alike CH751
(2 keys per ring)
Part number: PK-10-01



Overmoulded key, keyed alike CH751
(2 keys per ring)
Part number: PK-10-01-05



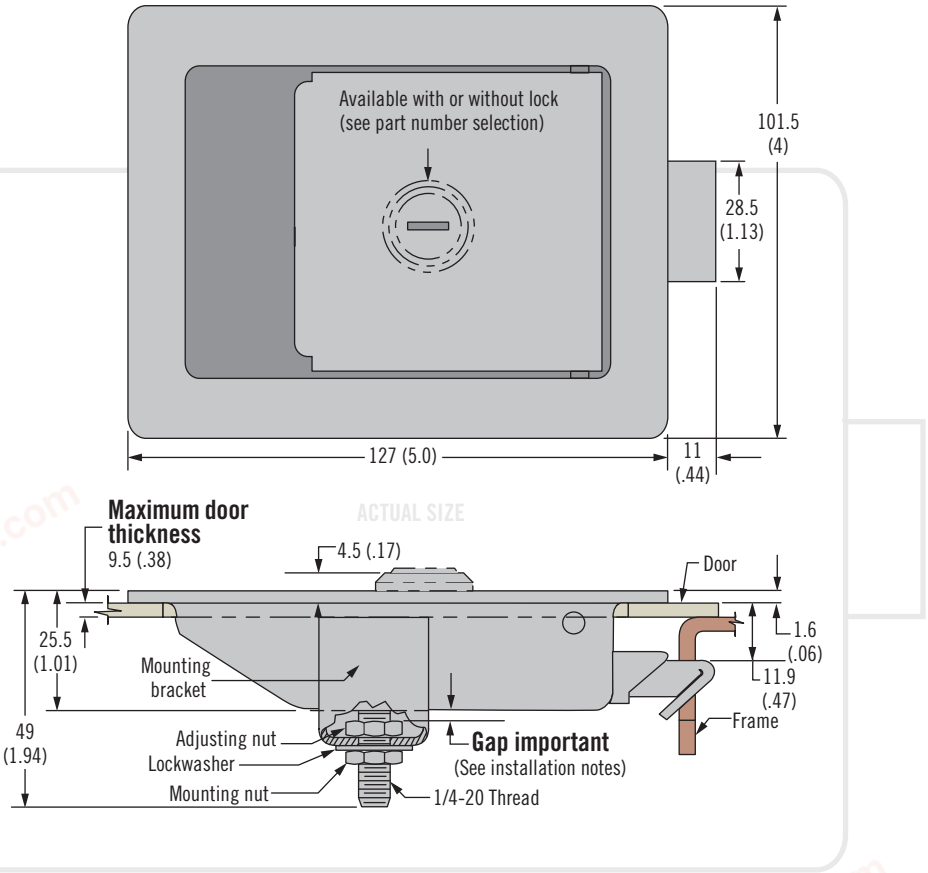

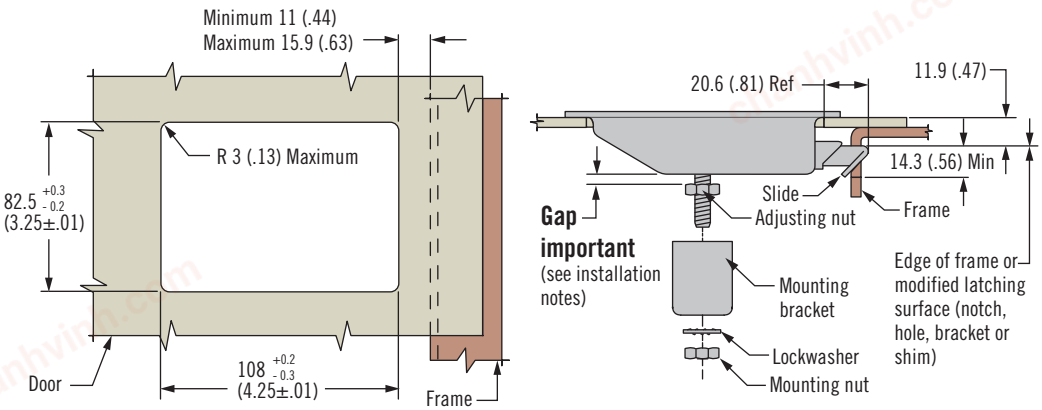

Part Number Selection

64 - 10 - 30 L - M 0

M Material
- **4** Steel, zinc plated
- **5** Stainless steel brushed
- **9** Steel, black powder coated

L Lock style
- **1** Non-locking
- **2** Key-locking keyed alike CH751 (2 Flat keys supplied)


Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com

64 Push-to-Close Latch

Pull-to-open · Paddle latch · Large



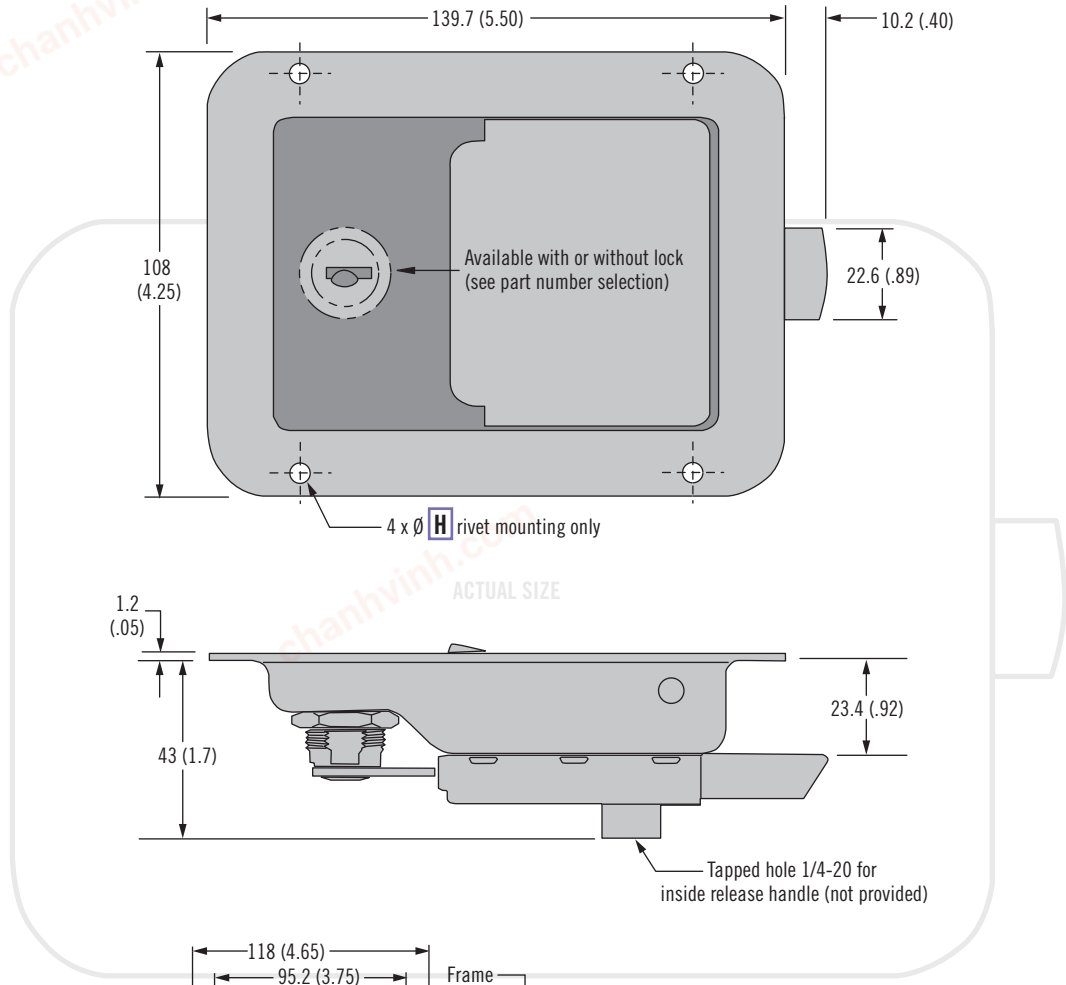

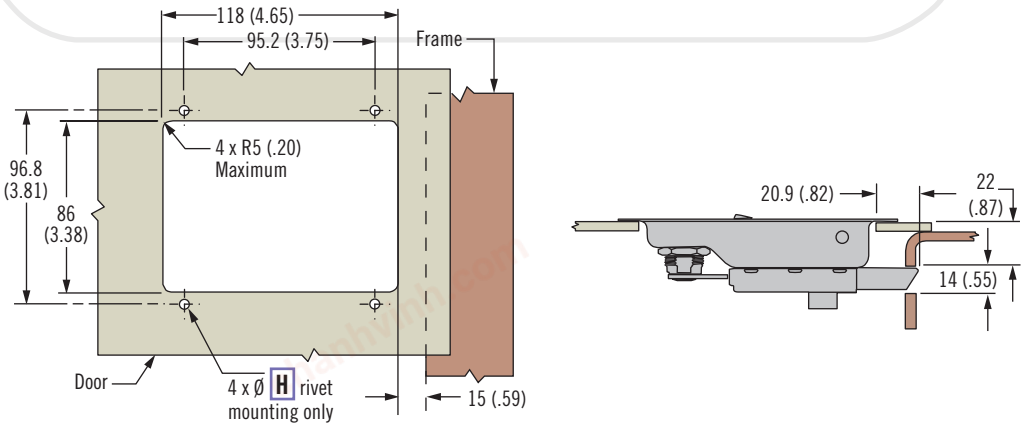

- **Single hole installation**
- **Multiple mounting styles**
- **Inside actuation in locked or unlocked position**

Material and Finish

Stainless steel, polished, steel, zinc plated or steel, black powder coated

Slide bolt and lock assembly: Zinc plated or powder coated

Performance Details

Max. working load: 560 N (125 lbf)

Accessories

Flat key, keyed alike CH751
(2 keys per ring)
Part number: PK-10-01



Overmoulded key, keyed alike CH751
(2 keys per ring)
Part number: PK-10-01-05



Part Number Selection


64 - 50 - 4 L H - M

M Material
10 Steel, zinc plated
20 Stainless steel polished
50 Steel, black powder coated

L Lock style
0 Non-locking
1 Key-locking keyed alike CH751 (2 Flat keys supplied)

H Housing
0 Weld
1 Rivet through hole 4.9 (.19)
2 Rivet through hole 5.2 (.20)

chanhvinh.com



64 Push-to-Close Latch

Pull-to-open · Paddle latch · Heavy-duty pivot

- **Robust design resists binding from dirt and debris**
- **Multiple mounting styles**

Material and Finish

Steel, zinc plated or black powder coated

Slide bolt and lock assembly:
Zinc plated or powder coated


Performance Details

Max. working load: 2700 N (607 lbf)

Accessories

Flat key, keyed alike 14603
(2 keys per ring)
Part number: PK-10-01-14603



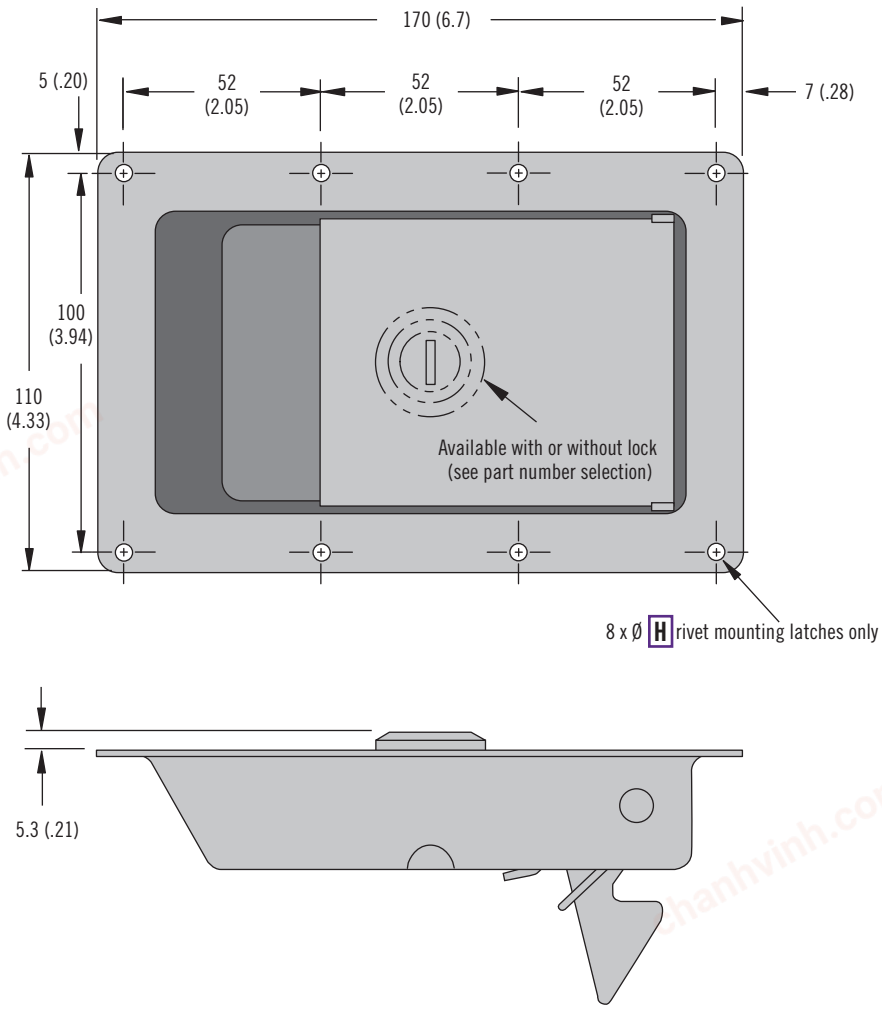

Part Number Selection

64 - 60 - 5 L H - M

M Material
10 Steel, zinc plated
50 Steel, black powder coated


L Lock style
0 Non-locking
1 Key-locking keyed alike 14603 (2 Flat keys supplied)

H Housing
0 Weld
1 Rivet through hole 4.9 (.19)
2 Rivet through hole 5.2 (.20)

Dimensions in millimeters (inch) unless otherwise stated

southco®

chanhvinh.com

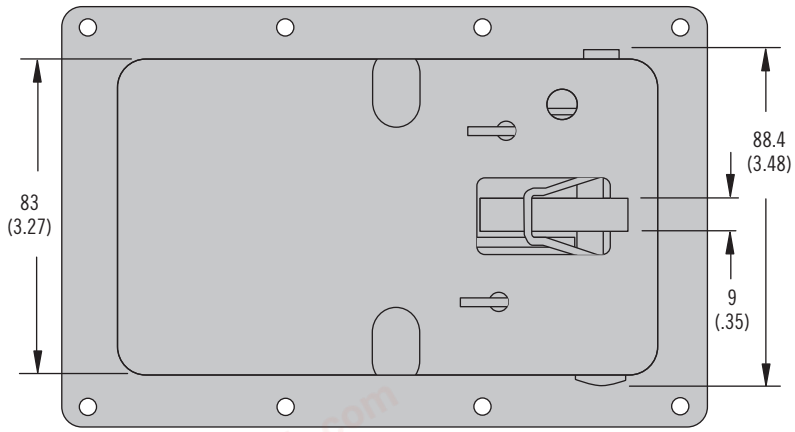

ACTUAL SIZE

