chanhvinh.com



92 Cam Latch

T and L-Handle · Adjustable grip

- **Round hole install**
- **Detents in open and closed position**

Material and Finish

Zinc alloy and steel, zinc plated

Performance Details

Maximum static load:
Short cam 400 N (90 lbf)
Long cam 200 N (45 lbf)

Installation Notes

Screw and lockwasher assembly M4 x 10 (supplied).
For door thickness > 3.0 (.12), calculate screw length using the following formula:
Door thickness + 7.00 (.28)

Keys


See page 120 and 169-175

Notes


For fixed grip versions see page 162

For version with 8 (.32) square shaft see page 185


T-Handle

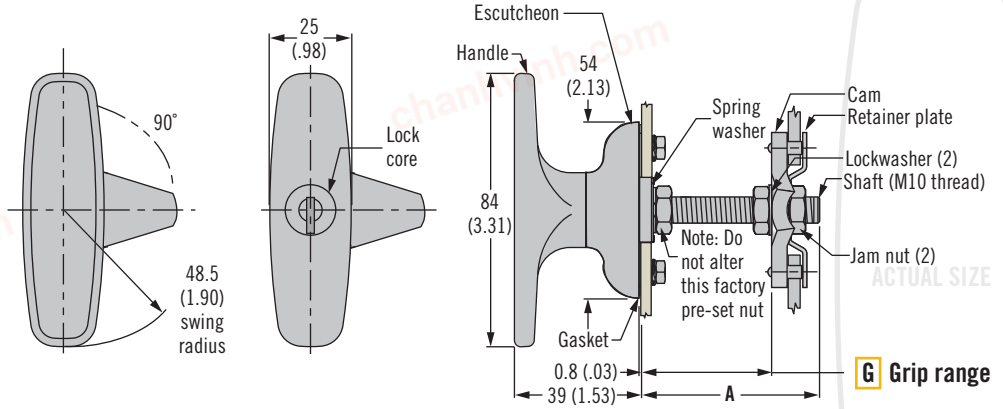


L-Handle

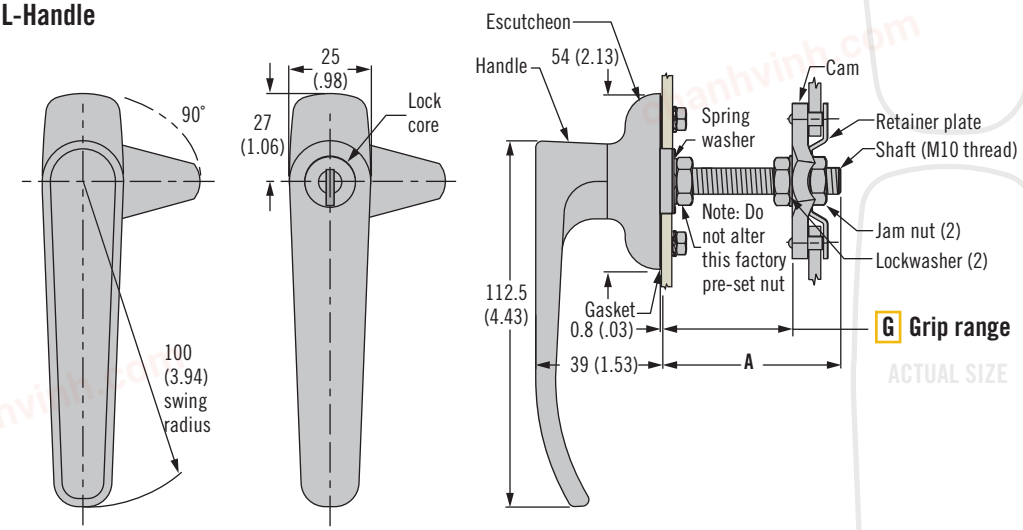

Cam (supplied)

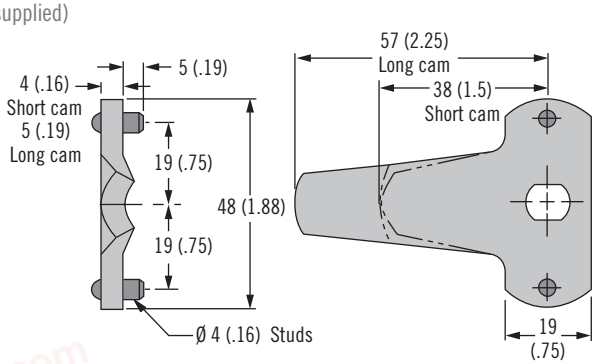


Retainer Plate (supplied)



Dimensions in millimeters (inch) unless otherwise stated


southco®


chanhvinh.com

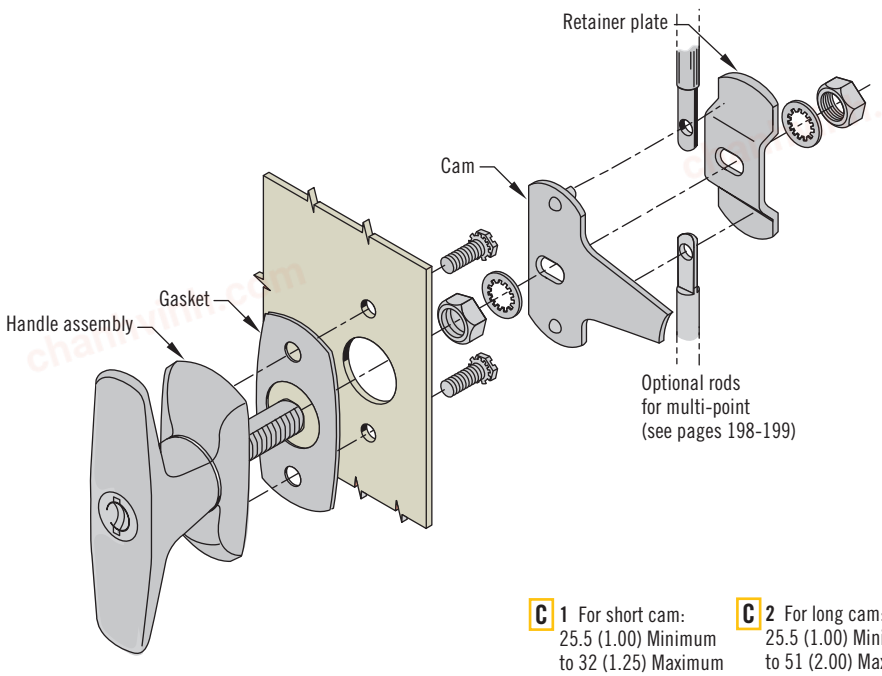

C 1 For short cam:
25.5 (1.00) Minimum
to 32 (1.25) Maximum

C 2 For long cam:
25.5 (1.00) Minimum
to 51 (2.00) Maximum



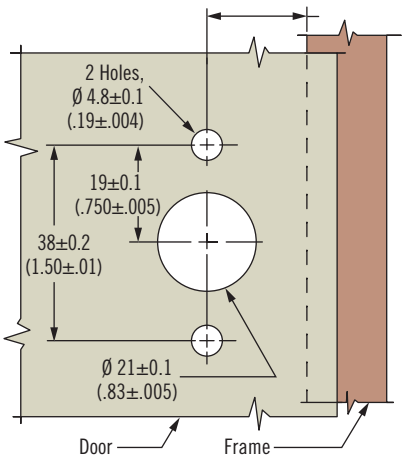

Part Number Selection

See table

R Rotation
1 Type A clockwise to latch
2 Type B counter-clockwise to latch

F Finish
1 Bright chrome
5 Black powder coated

C Cam
1 Short 38 (1.5)
2 Long 57 (2.25)

92 - L R - F G C

L Lock style
1 T-handle non-locking
2 T-handle key-locking CH751 (two keys supplied)
3 L-handle non-locking
4 L-handle key-locking CH751 (two keys supplied)

G Grip	Minimum	Maximum	A
1	16 (.63)	19 (.75)	32 (1.25)
2		32 (1.25)	44.5 (1.75)
3		44.5 (1.75)	57.5 (2.25)