
chanhvinh.com


96 Hinge
Lift-off




Type A

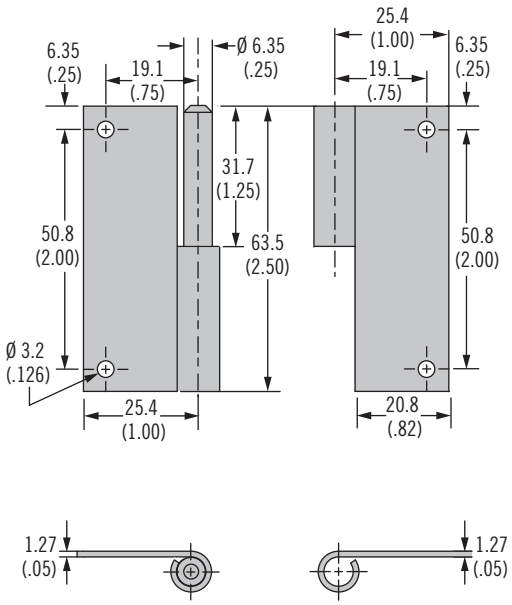

Type B

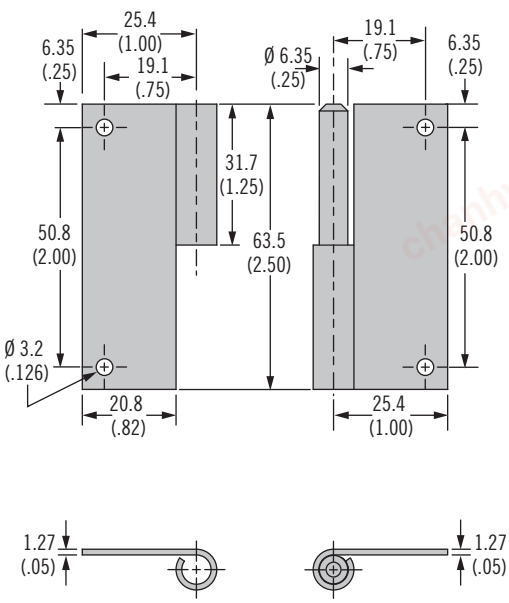

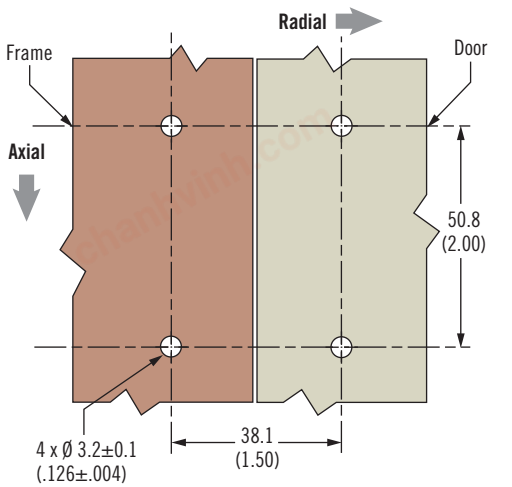

Type "A" application shown

ACTUAL SIZE

- **Allows for quick, easy door removal**
- **All metal construction**

Material and Finish


Steel, zinc plated or stainless steel

Part Number

See table

Material	Part Number	
	Type A	Type B
Steel	96-04-N1WL	96-04-N1WR
Stainless Steel	96-04-S1WL	96-04-S1WR

chanhvinh.com



96 Hinge

Lift-off · In-line · Zinc

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Zinc alloy, black powder coated

Performance Details


	Radial Load	Axial Load
Maximum static load	1300 N (300 lbf)	2200 N (500 lbf)
Average ultimate load	3300 N (750 lbf)	9300 N (2100 lbf)

Installation Notes


Screws not supplied.
Maximum tightening torque of screw: 8.5 N•m (75 in•lbf)

Calculate screw length using the following formula:
Door thickness + 5 (.200)


In-line mount preparation:
To allow for 180° rotation R or S must be < 25.4 (1.00).

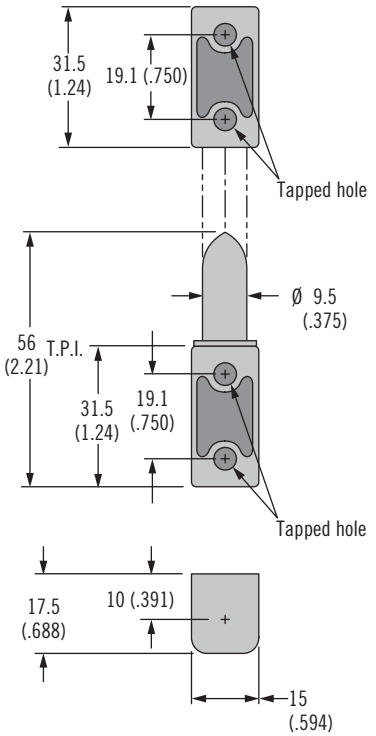



For Lift-Off Mounting

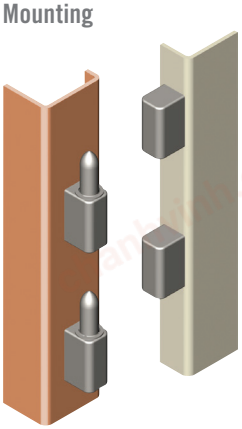

For Non Lift-Off Mounting

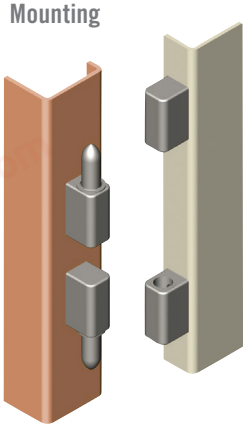

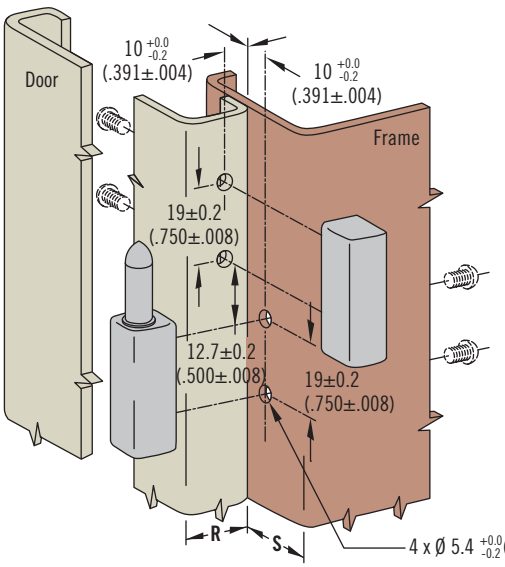

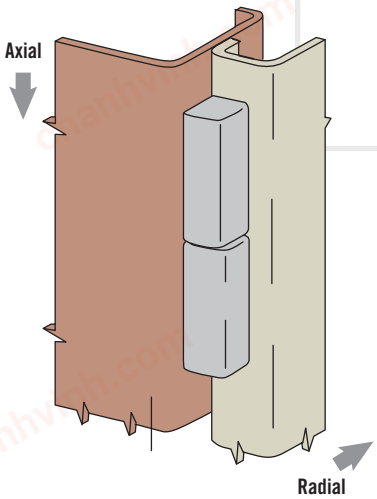

ACTUAL SIZE

Part Number

See Table

Tapped Hole	Part Number
Imperial 10-32	96-10-500-50
Metric M5 x 0.8	96-50-500-50

Dimensions in millimeters (inch) unless otherwise stated

chanhvinh.com

96 Hinge

Lift-off · Offset · Zinc



- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Zinc alloy, black powder coated

Performance Details


	Radial Load	Axial Load
Maximum static load	1300 N (300 lbf)	2200 N (500 lbf)
Average ultimate load	3300 N (750 lbf)	9300 N (2100 lbf)

Installation Notes


Screws not supplied.
Maximum tightening torque of screw: 8.5 N•m (75 in•lbf)

Calculate screw length using the following formula:
Door thickness + 10 (.400)


Type B **Type A**

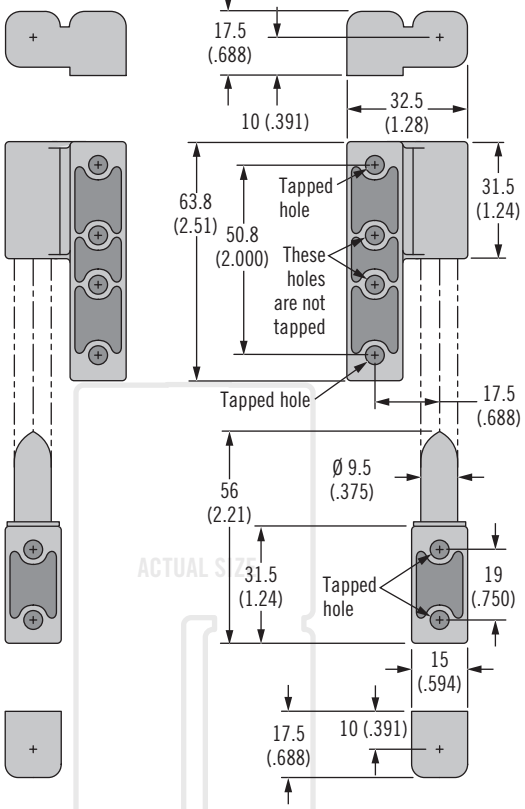



For Lift-Off Mounting

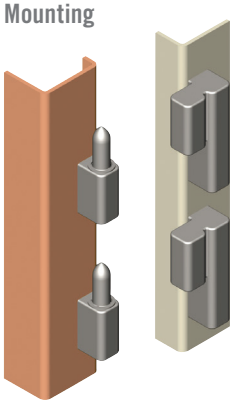


For Non Lift-Off Mounting

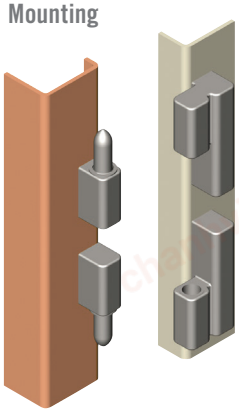

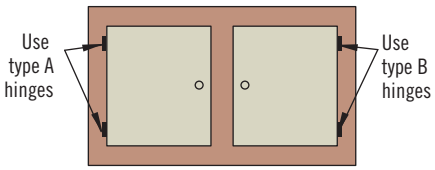

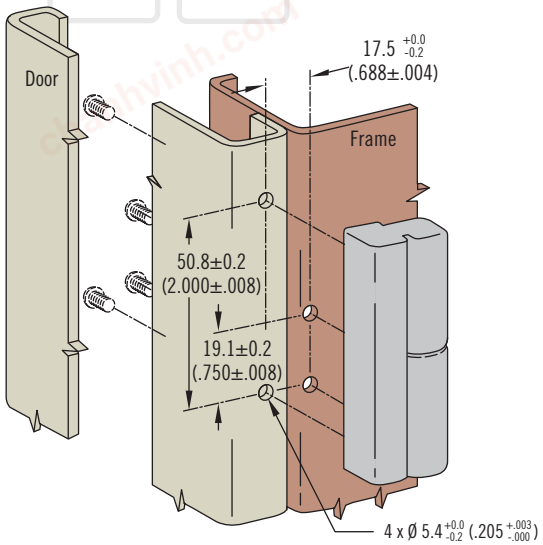

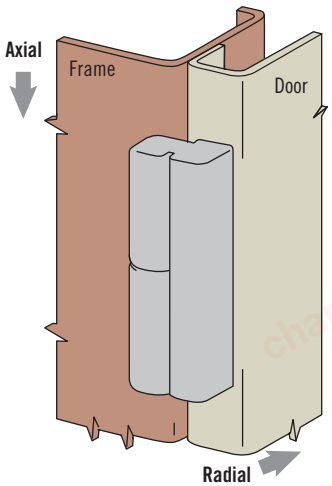

Tapped Hole	Part Number	
	Type A	Type B
Imperial 10-32	96-10-510-50	96-10-520-50
Metric M5 x 0.8	96-50-510-50	96-50-520-50

Part Number

See table

chanhvinh.com



96 Hinge

Lift-off · In-line · Zinc and stainless steel

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Zinc alloy, chrome plated, powder coated or stainless steel

Performance Details

Radial load
Maximum static load:
Zinc alloy: 1300 N (300 lbf)
Stainless steel: 3000 N (670 lbf)


Axial Load
Maximum static load:
Zinc alloy: 2200 N (500 lbf)
Stainless steel: 5000 N (1120 lbf)


Installation Notes

Screws not supplied.
Attach hinge with four M5 x 0.8
Maximum screw length = door (or frame) thickness + 10 (.400)


Accessories

Black EPDM gasket kit 96-0-73469 (order separately)




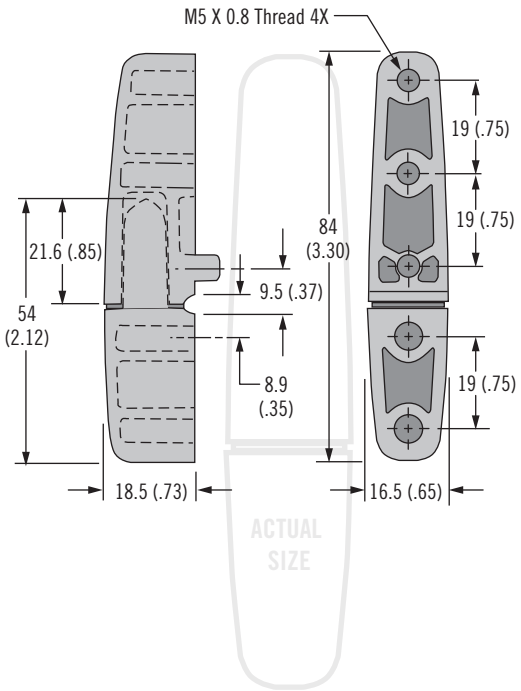



For Lift-Off Mounting

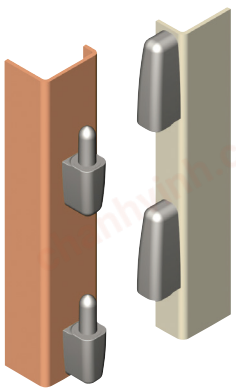

For Non Lift-Off Mounting

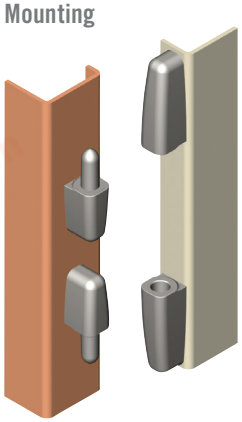

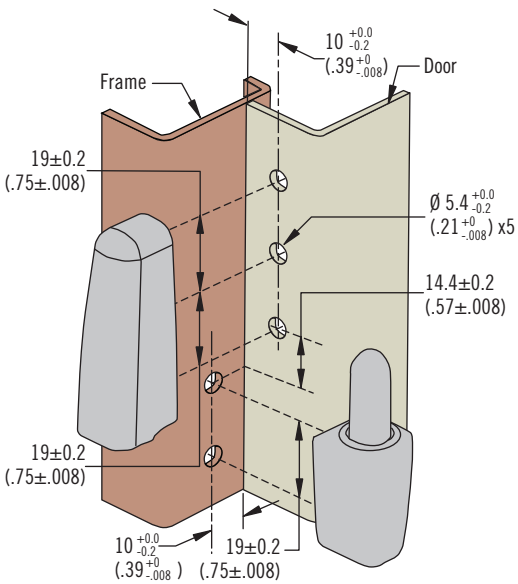

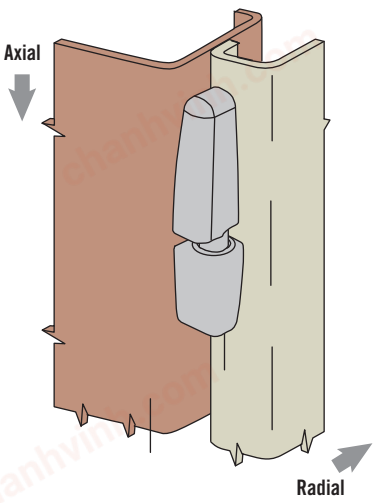

Part Number

See table

Material & Finish	Part Number
Zinc alloy, bright chrome	96-MA-80-10
Zinc alloy, black powder coated	96-MA-80-50
Zinc alloy, satin chrome	96-MA-80-20
Stainless steel, polished	96-MA-80-24

Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com

96 Hinge


Lift-off · Offset · Stainless steel





For Lift-Off Mounting

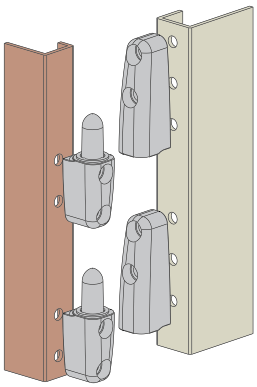


For Non Lift-Off Mounting

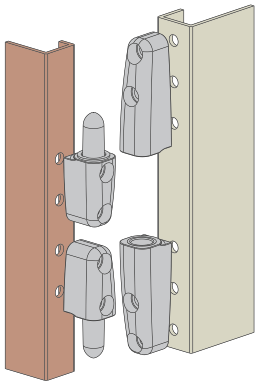

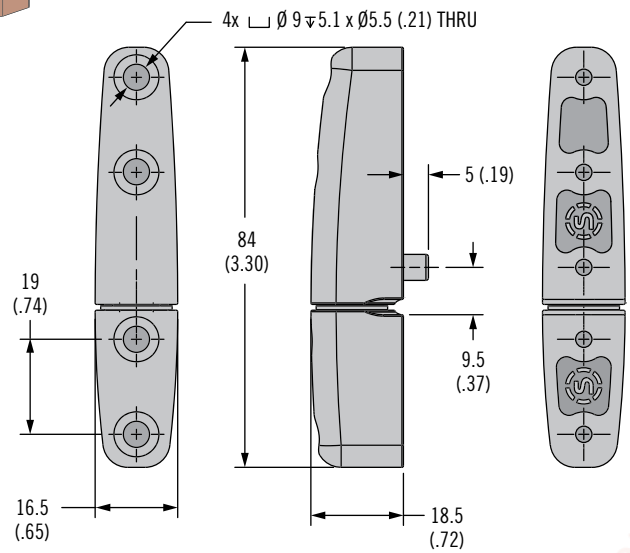

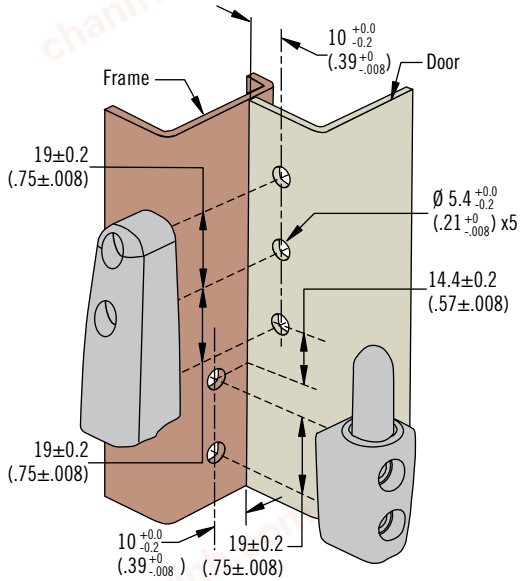

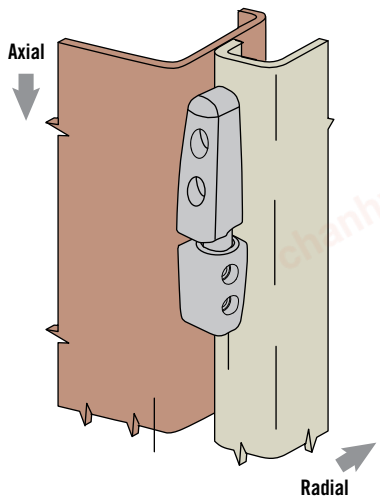

Material & Finish	Part Number
Stainless steel, Polished	96-99-397-24

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Finish: Bright polish on visible surfaces; Electro-polished on non-visible surfaces


Installation Notes

A. Attach hinge with 4x m5 x 0.8 Socket Cap screws.

B. Minimum screw length = door or frame Thickness + 17.8mm. (Or frame) thickness + 10 (.400)

Accessories

Black EPDM gasket kit 96-0-73469 (order separately)



Part Number

See table


chanhvinh.com


96 Hinge

Lift-off · Offset · Zinc and stainless steel





Type A

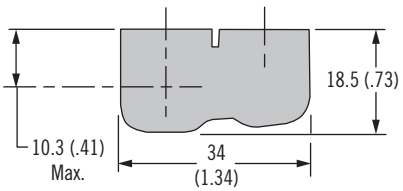


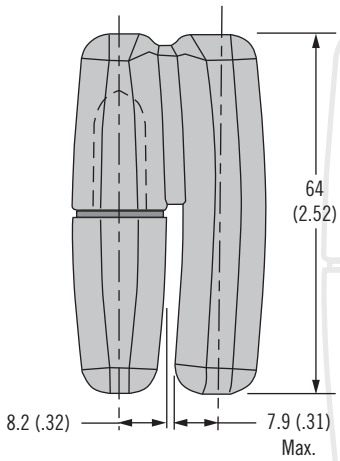


Type B

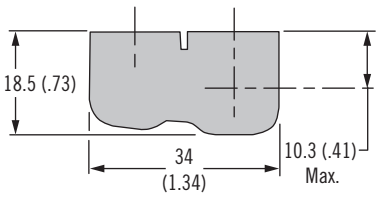

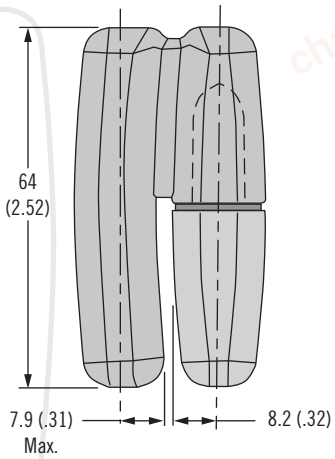


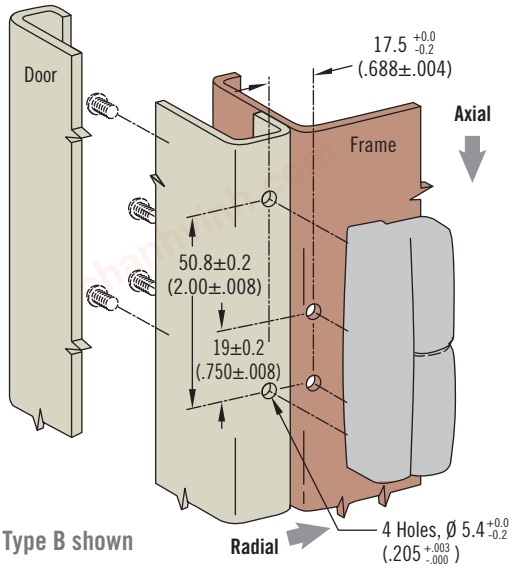


Type B shown

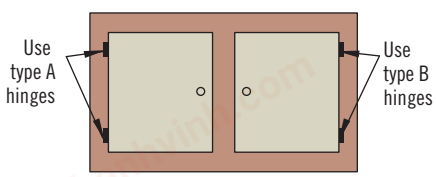

For Lift-Off Mounting

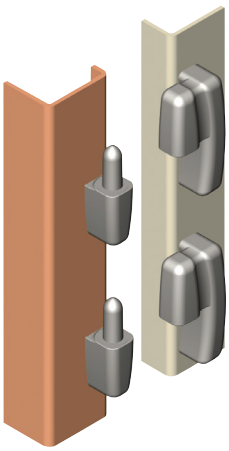

For Non Lift-Off Mounting

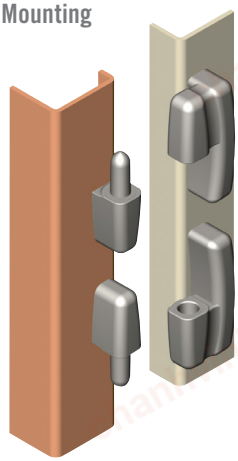

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Zinc alloy, chrome plated, powder coated or stainless steel

Performance Details

Radial load
Maximum static load:
Zinc alloy: 1300 N (300 lbf)
Stainless steel: 3000 N (670 lbf)


Axial Load
Maximum static load:
Zinc alloy: 2200 N (500 lbf)
Stainless steel: 5000 N (1120 lbf)

Installation Notes

Screws not supplied.
Attach hinge with four M5 x 0.8
Maximum screw length = door (or frame) thickness + 10 (.400)

Accessories

Black EPDM gasket kit 96-25-8A-02 (order separately)



Material & Finish	Part Number	
	Type A	Type B
Zinc alloy, bright chrome	96-MA-8A-10	96-MA-8B-10
Zinc alloy, black powder coated	96-MA-8A-50	96-MA-8B-50
Zinc alloy, satin chrome	96-MA-8A-20	96-MA-8B-20
Stainless steel, polished	96-MA-8A-24	96-MA-8B-24

Part Number

See table

chanhvinh.com



96 Hinge

Lift-off · In-line · Offset · Plastic

- Allows for quick, easy door removal
- Corrosion-resistant materials
- Door can also be permanently installed

Material and Finish


Glass-filled nylon, black

Performance Details


300 Series	Radial Load	Axial Load
Maximum static load	670 N (150 lbf)	1560 N (350 lbf)
Average ultimate load	1100 N (250 lbf)	2500 N (550 lbf)

400 Series	Radial Load	Axial Load
Maximum static load	1000 N (225 lbf)	2000 N (450 lbf)
Average ultimate load	1900 N (425 lbf)	4900 N (1100 lbf)


In-Line Knuckle Style

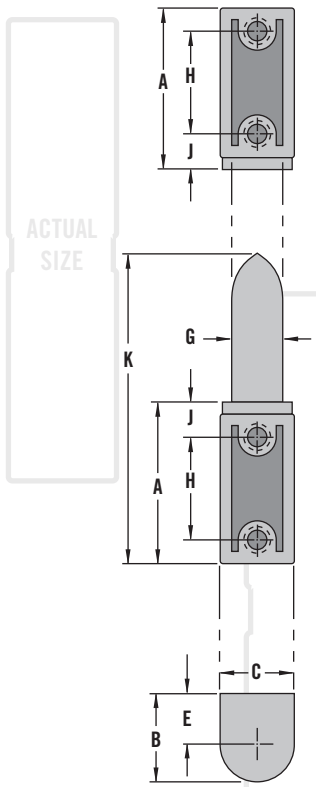

Offset Knuckle Style

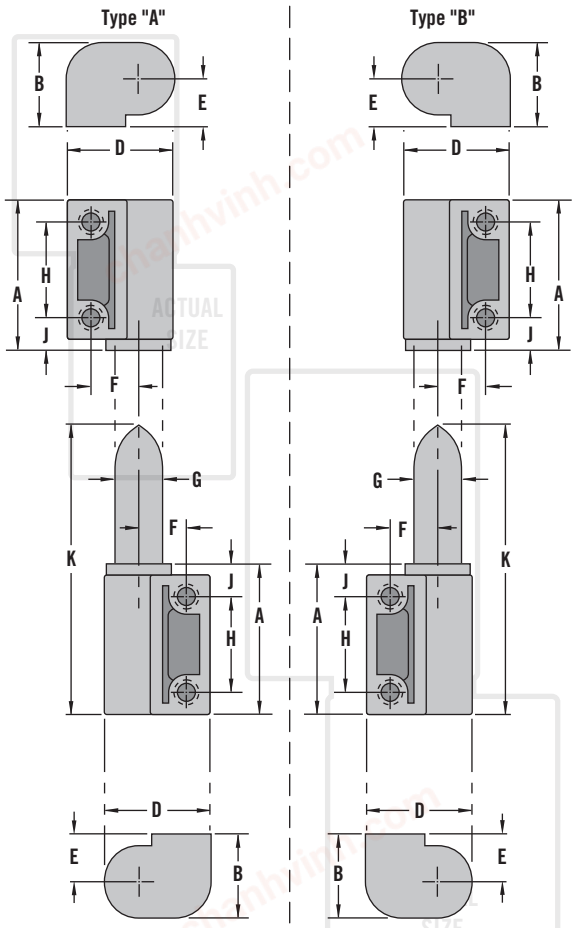

Mounting variations

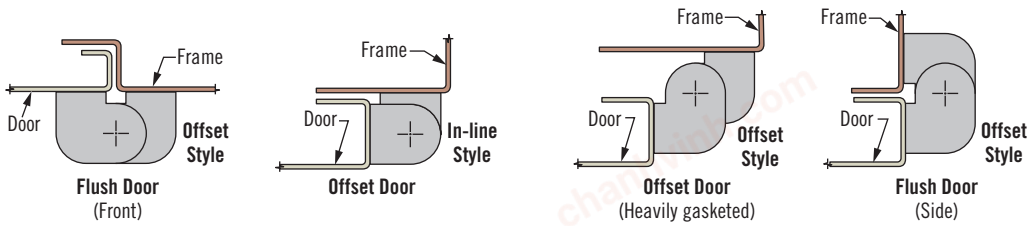

Part Number


See table


Series	Tapped Hole	Dimensions								Part Number		
		A	B	C	D	E, F & G	H	J	K	In-Line Knuckle Style	Offset Knuckle Style Type "A"	Offset Knuckle Style Type "B"
300	M5	31 (1.22)	16.7 (.66)	14.3 (.56)	21.5 (.84)	9.5 (.38)	19 (.75)	7 (.28)	58 (2.28)	96-50-300-11	96-50-310-11	96-50-320-11
	10-24									96-10-300-11	96-10-310-11	96-10-320-11
400	M6	41.3 (1.63)	22.2 (.88)	19 (.75)	28.5 (1.13)	12.7 (.50)	25.5 (1.00)	9.5 (.38)	78 (3.06)	96-50-400-11	96-50-410-11	96-50-420-11
	1/4-20									96-10-400-11	96-10-410-11	96-10-420-11


Dimensions in millimeters (inch) unless otherwise stated

chanhvinh.com


In-Line Knuckle Style

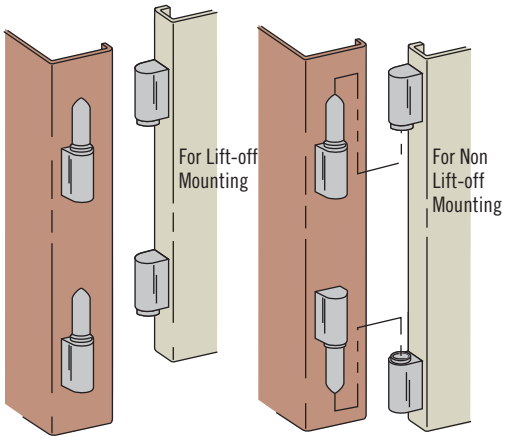


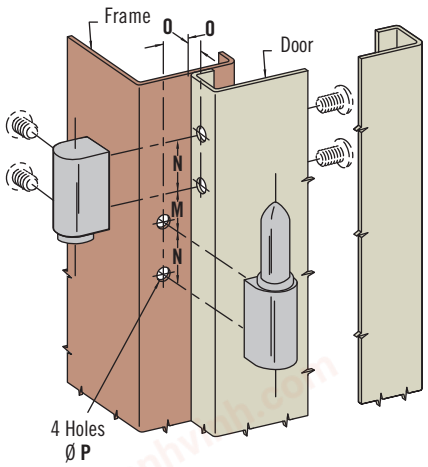


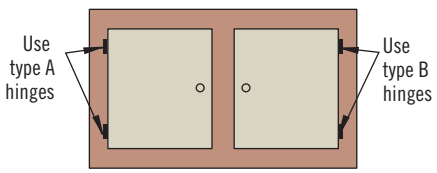

Offset Knuckle Style

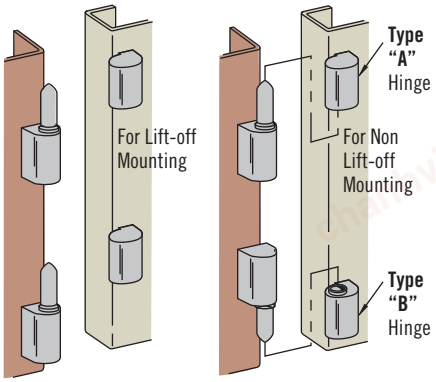

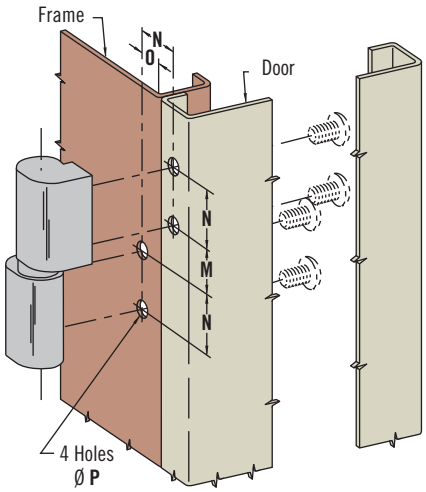

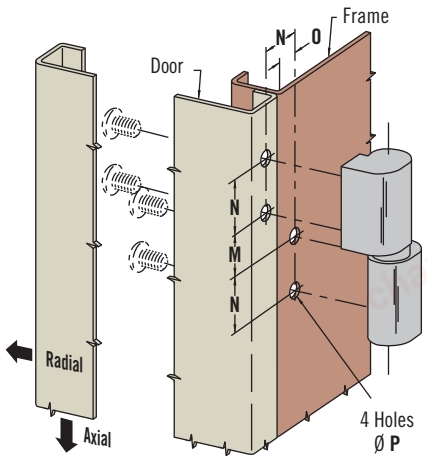

Installation Notes

Screws not supplied
Maximum tightening torque of screw: 2.8 N•m (25 in•lbf)

Calculate screw length using the following formula:
Door thickness + adjustment value

Series	Adjustment Value	
	In-Line	Offset
300	4.8 (.19)	6.5 (.25) Min. to 9.5 (.38) Max.
400	6.4 (.25)	9.5 (.38) Min. to 12.7 (.50) Max.

Series	Installation Dimensions			
	M	N	O	P
300	14.3 $^{+0.0}_{-0.3}$ (.563±.008)	19 $^{+0.2}_{-0.1}$ (.750±.008)	9.5 $^{+0.3}_{-0.1}$ (.375±.005)	5.4 $^{+0.1}_{-0.0}$ (.205 $^{+.003}_{-.000}$)
400	19.0 $^{+0.0}_{-0.3}$ (.750±.008)	25.5 $^{+0.1}_{-0.2}$ (1.000±.008)	12.7 $^{+0.2}_{-0.1}$ (.500±.005)	6.7 $^{+0.1}_{-0.0}$ (.264 $^{+.003}_{-.000}$)

chanhvinh.com



96 Hinge

Lift-off · In-line · Plastic

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Black: Glass-filled nylon
Chrome: PC/ABS blend, chrome

Performance Details

Black	Radial Load	Axial Load
Maximum static load	700 N (155 lbf)	1200 N (270 lbf)
Average Ultimate load	1000 N (224 lbf)	3500 N (785 lbf)

Chrome	Radial load	Axial load
Maximum static load	350 N (79 lbf)	900 N (202 lbf)
Average ultimate load	600 N (135 lbf)	2200 N (495 lbf)

Installation Notes

Recommended tightening torque for mounting screws:
1.6 N•m (14 in•lbf)


Offset mount preparation:
To allow for 180° rotation A or B must be 8.5±1 (.33±.04)

Part Number


See table

Order pin, receiver and 4x screw separately


Receiver

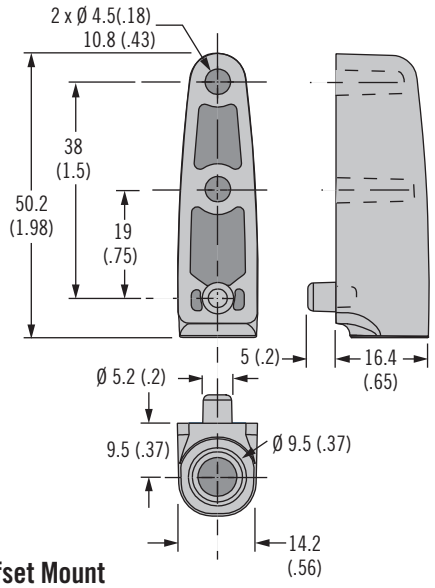


Pin

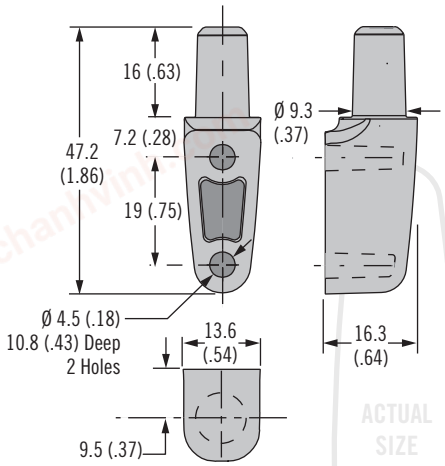

Offset Mount

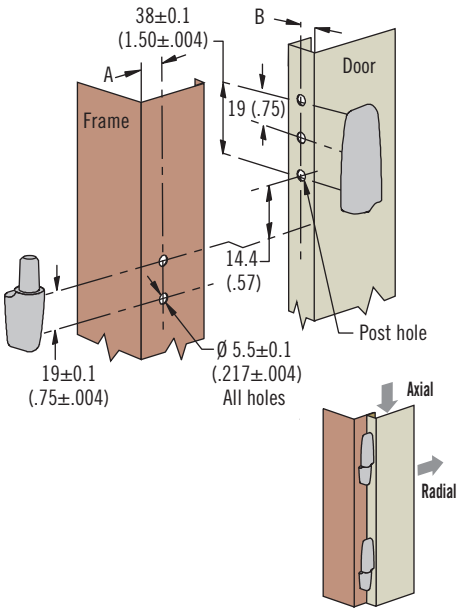

Flush Mount

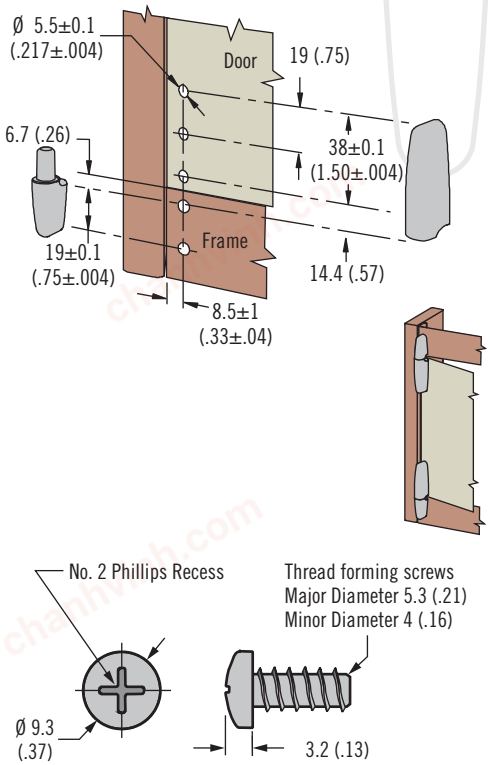

Door Thickness	Part Number
	Screws (4 per bag)
1 - 4 (.04 - .16)	96-79-1
4 - 7 (.16 - .28)	96-79-2
7 - 10 (.28 - .39)	96-79-3
10 - 13 (.39 - .51)	96-79-4

Finish	Part Number	
	Pin	Receiver
Black	96-710	96-720
Chrome	96-711	96-721

Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com

96 Hinge


Lift-off · Adjustable compression · In-line · Zinc





Front Mount

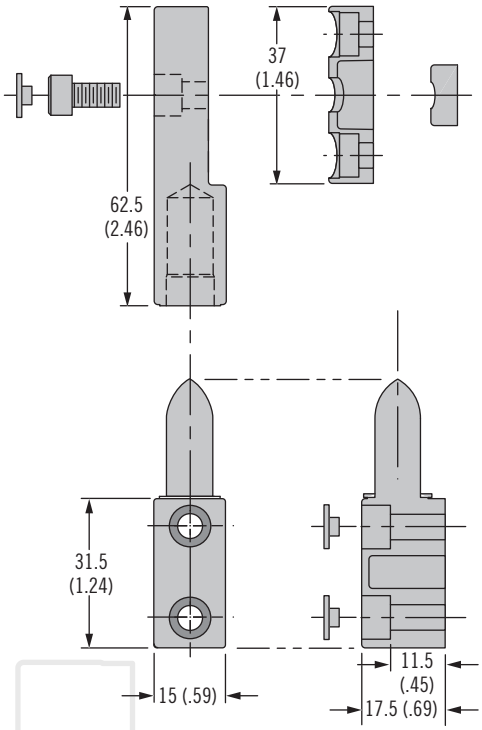

Concealed Mount

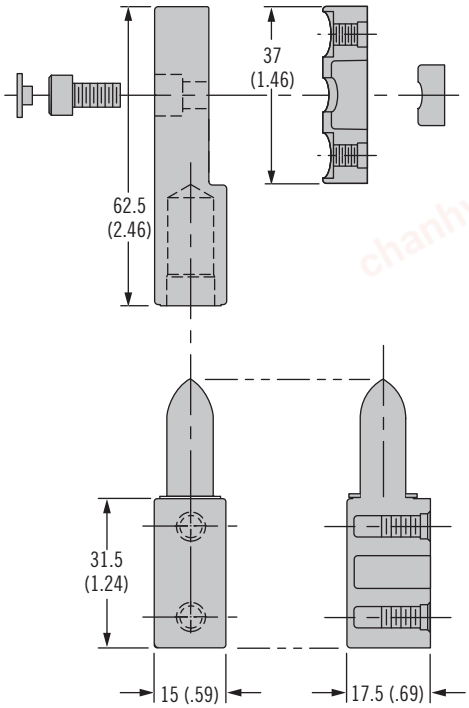

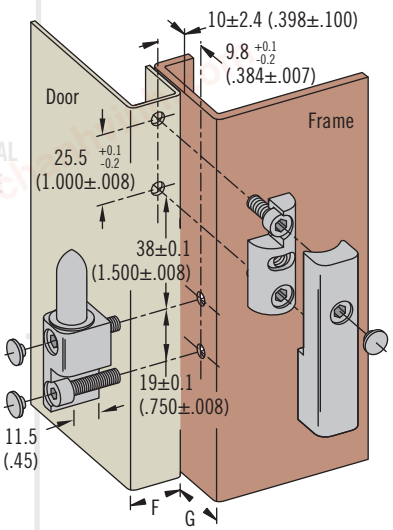

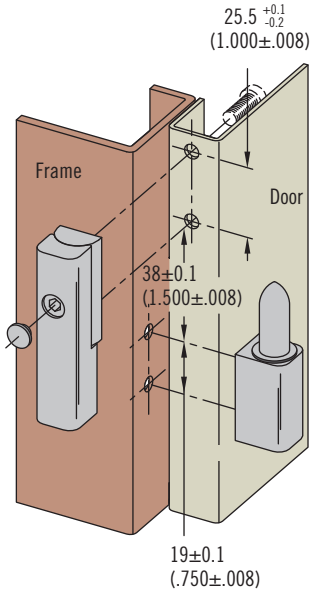

Install Style	Tapped Hole	Part Number
Front mount	Thru hole	96-10-572
Concealed mount	10-32 Imperial	96-10-570
	M5 x 0.8 Metric	96-50-570

- **Adjusts to ensure gasket compression**
- **Allows for quick, easy door removal**

Material and Finish

Zinc alloy, black powder coated

Installation Notes


Screws not supplied.
Maximum screw length equals door or frame thickness plus 7.5 (.30)

Performance Details

	Radial Load	Axial Load
Maximum static load	1000 N (255 lbf)	2220 N (500 lbf)
Average ultimate load	1550 N (350 lbf)	14,000 N (3200 lbf)

Notes

Hinges provide 5 (.20) of total adjustment
Either F Dimension or G dimension must be less than 19.8 (.78) for the door to open a full 180°



Part Number

See table

chanhvinh.com



96 Hinge

Lift-off · In-line · Zinc

- **Allows for quick, easy door removal**
- **Concealed installation**

Material and Finish

Zinc alloy, black powder coated

Performance Details


	Radial Load	Axial Load
Maximum static load	1100 N (250 lbf)	1250 N (280 lbf)
Average ultimate load	2400 N (530 lbf)	2600 N (580 lbf)


Installation Notes


Screws not supplied.
Recommended tightening torque for mounting screws:
1.1 N•m (10 in•lbf)

Calculate screw length using the following formula:
Door / frame thickness +5 (.20)

In-Line

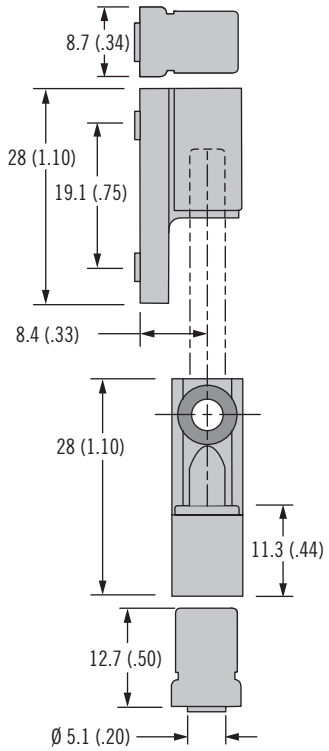

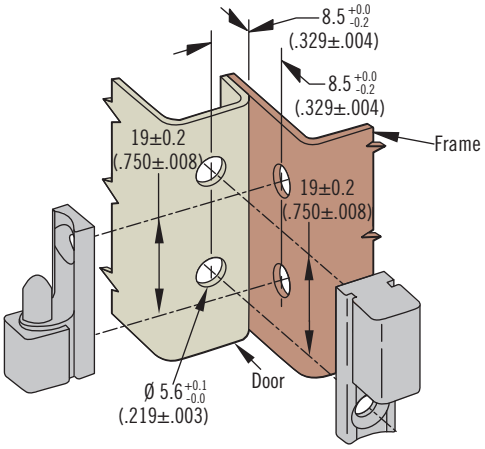

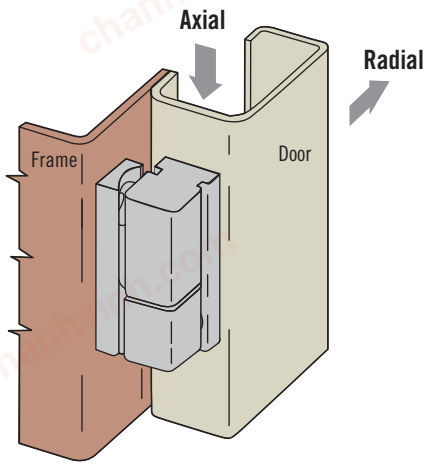

Part Number

See table


Tapped Hole	Part Number
Imperial 6-32	96-110
Metric M4 x 0.7	96-140

Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com

96 Hinge


Lift-off · Offset · Zinc





Offset Type A

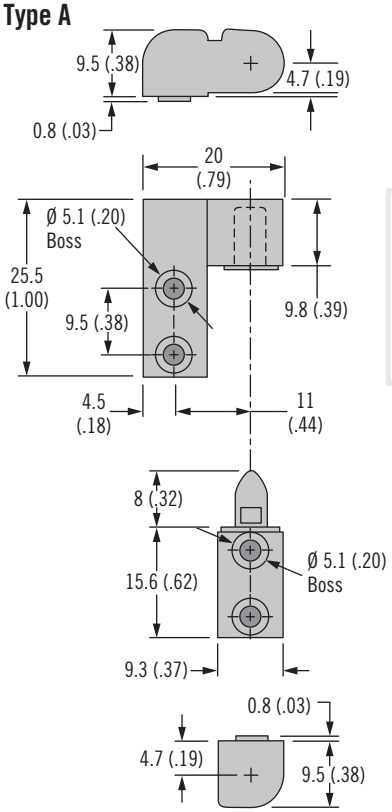


Offset Type B

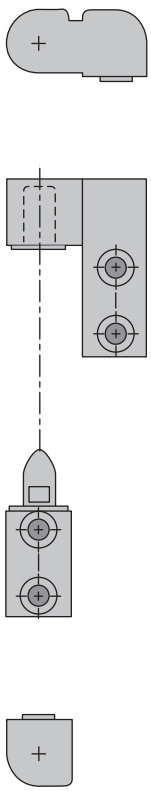

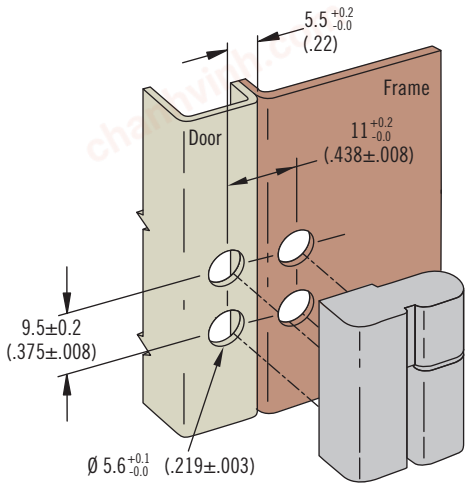

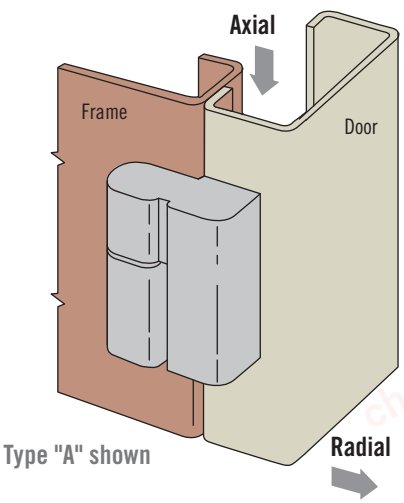

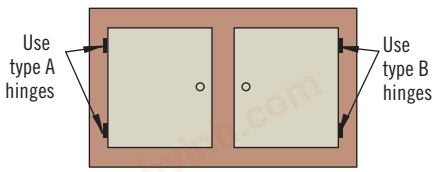

Tapped Hole	Part Number	
	Type A	Type B
Imperial 6-32	96-111	96-112
Metric M4 x 0.7	96-141	96-142

- **Allows for quick, easy door removal**
- **Door can also be permanently installed**

Material and Finish

Zinc alloy, black powder coated

Performance Details

	Radial Load	Axial Load
Maximum static load	1100 N (250 lbf)	1250 N (280 lbf)
Average ultimate load	3300 N (750 lbf)	2600 N (580 lbf)

Installation Notes

Screws not supplied.
Recommended tightening torque for mounting screws:
1.1 N•m (10 in•lbf)

Calculate screw length using the following formula:
Door / frame thickness +5 (.20)

Part Number

See table