chanhvinh.com



P1 Flush Pull

Low profile · Lift or pull · Single hole mount

- **Easy installation**
- **Deep pocket**

Material and Finish

Pull and cup: ABS plastic, black
Screws: Steel, zinc plated

Performance Details

Maximum static load:
Lifting / pulling: 1300 N (300 lbf)



Pushing / sliding: 450 N (100 lbf)




Flammability rating:
UL94-HB or UL94-V0 (See table)


Operating temperature range:
-50°C (-60°F) to 60°C (140°F)

Installation Notes

Mounting screws supplied.
Door thickness less than the minimum for each range allows some movement of the pull.
Maximum torque for mounting screws is 0.5 N•m (5 in•lbf)

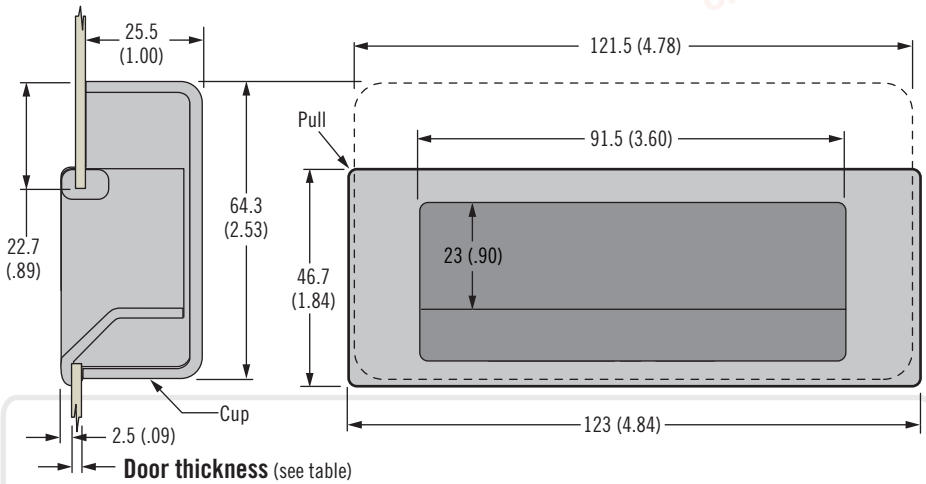

ACTUAL SIZE

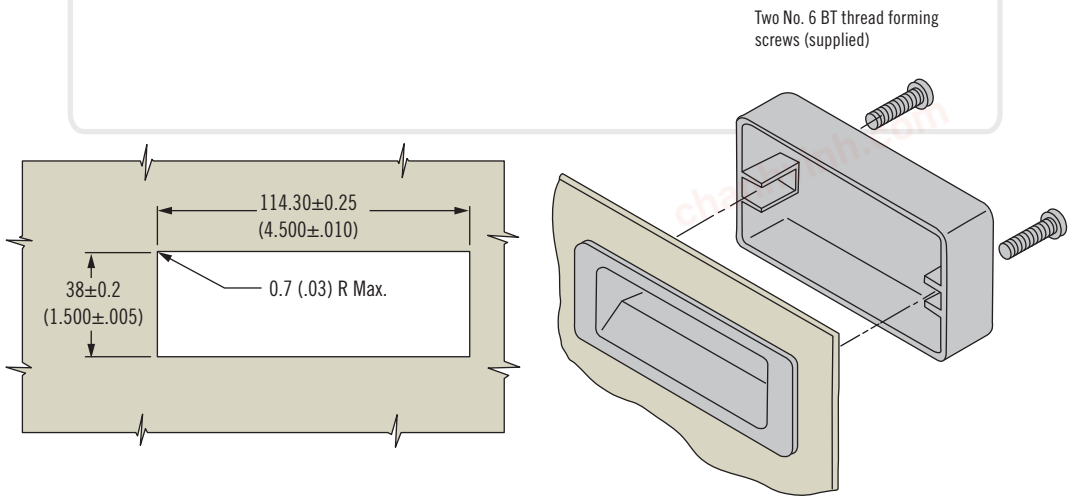

Part Number

See table

Door Thickness Range		Part Number	
Min.	Max.	UL94-HB	UL94-V0
1.0 (.040)	1.8 (.070)	P1-30-101-11	P1-31
1.8 (.070)	3.3 (.130)	P1-30-103-11	P1-33
3.3 (.130)	4.8 (.190)	P1-30-105-11	P1-35
4.8 (.190)	6.3 (.250)	P1-30-107-11	P1-37


Dimensions in millimeters (inch) unless otherwise stated


chanhvinh.com

Handles

P1 Flush Pull




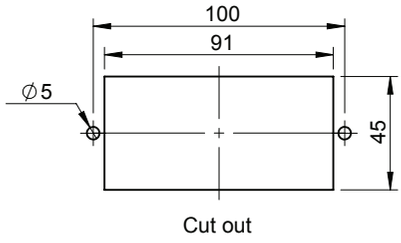


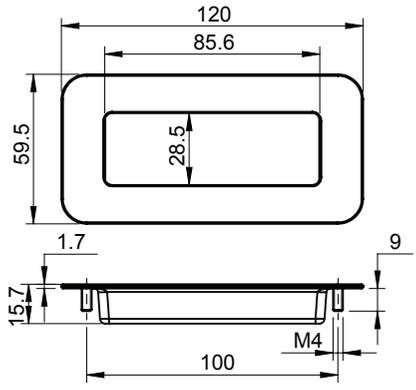

Product Code	Material	Finish
P1-DHRSS-120	SS-304	Electro Polishing



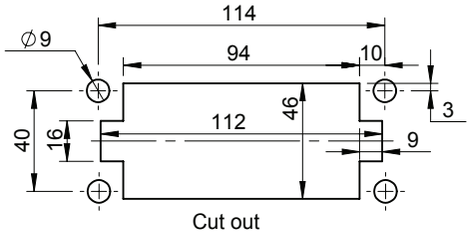

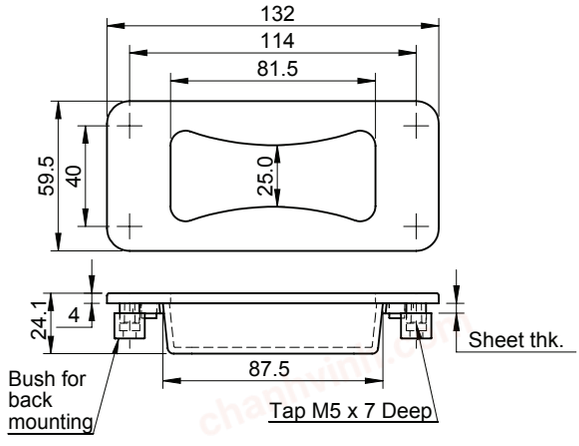

Product Code	Material	Finish
P1-DHRZ-130	Zinc	Black PC