
chanhvinh.com



TL Draw Latch

Over-center · Wire bail

- **Compact latch**
- **Multiple link options for application variances**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Steel working load:
Compact heavy-duty:
1290 N (290 lbf)
Compact: 220 N (45 lbf)

Stainless steel working load:
Compact heavy-duty:
800 N (180 lbf)
Compact: 220 N (45 lbf)


Installation Notes

Install assembly with M4 (No. 6) round head screws (not supplied) or 4 (.156) rivets


Notes

Order keepers separately, see page 338


Exposed Mounting Holes

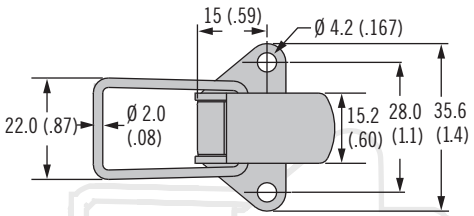


Heavy-Duty




Flat Wire Link




Short Curved Wire Link




Long Curved Wire Link




Shallow Hook Link




Deep Hook Link




Concealed Mounting Holes

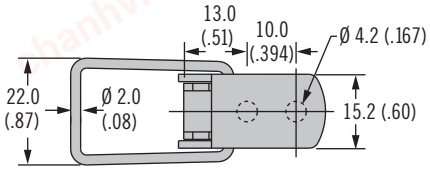


Flat Wire Link




Short Curved Wire Link




Long Curved Wire Link



Shallow Hook Link



Deep Hook Link



Part Number Selection

Latch only

See page 338 for keepers

L Link style
1 Flat
2 Short curved
3 Long curved
4 Shallow hook
5 Deep hook
6 Heavy-duty

TL - 20 - B 0 L - F

B Base type
1 Exposed
2 Concealed

F Finish
07 Steel, zinc plated
52 Stainless steel, passivated

Dimensions in millimeters (inch) unless otherwise stated

southco®


chanhvinh.com

TL Draw Latch

Over-center · Wire bail




Exposed Mounting Holes

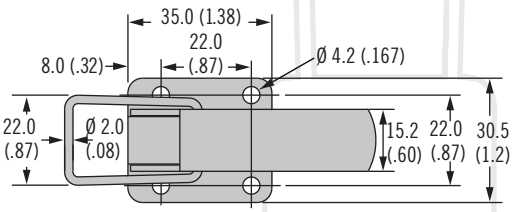


ACTUAL SIZE


Flat Wire Link

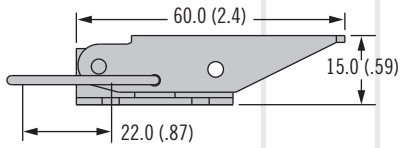


Curved Wire Link

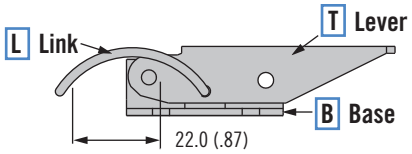


Shallow Hook Link



Deep Hook Link

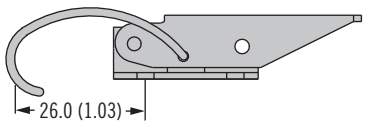


Concealed Mounting Holes

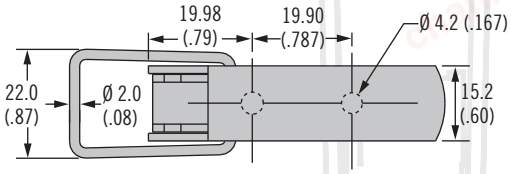


ACTUAL SIZE


Flat Wire Link

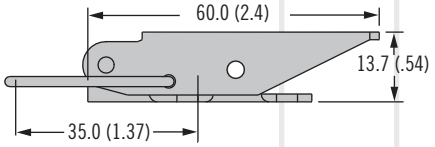


Curved Wire Link



Shallow Hook Link

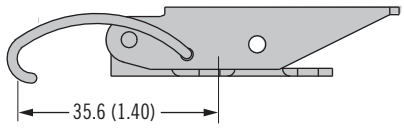

Deep Hook Link

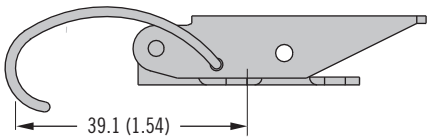

- **Multiple link options for application variances**
- **Secondary locking style available**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Steel:
Working load: 220 N (45 lbf)

Stainless Steel:
Working load: 220 N (45 lbf)

Installation Notes

Install assembly with M4 (No. 6) round head screws (not supplied) or 4 (.156) rivets

Notes

Order keepers separately, see page 338

Part Number Selection

Latch only

See page 338 for keepers

TL - 40 - B T L - F

L Link style
- **1** Flat
- **3** Short curved
- **4** Shallow hook
- **5** Deep hook

B Base type
- **1** Exposed
- **2** Concealed

T Lever type
- **0** Standard
- **1** Secondary catch (Exposed base only)
- **2** Padlockable (Steel model only) (Concealed base only)

F Finish
- **07** Steel, zinc plated
- **52** Stainless steel, passivated

chanhvinh.com



TL Keeper

Keeper

- **Multiple keeper options for application variances**
- **Suitable for all TL-20 and TL-40 latches**


Material and Finish

Stainless steel, steel, zinc plated


Installation Notes

Install assembly with M4 (No. 6) round head screws (not supplied) or 4 (.156) rivets


Exposed




Concealed




Small




Right Angle




Narrow



Large



Medium

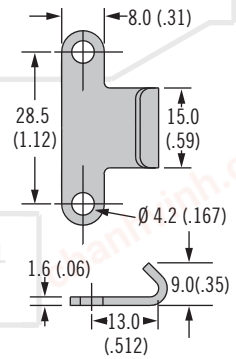

Part Number Selection

1. Select your latch choice in the draw latch column
2. Select your keeper style in the keeper style row
3. Where the column and row meet use the figure for your install **S** dimension

B Base type

- **1** Small
- **2** Narrow
- **3** Right angle
- **5** Large
- **9** Medium

TL - 17 - 20 B - F

F Finish

- **07** Steel, zinc plated
- **52** Stainless steel passivated

Keeper Style	Small	Narrow	Large	Medium
	TL-17-201-F	TL-17-202-F	TL-17-205-F	TL-17-209-F
Draw Latch	S Dimension			
TL-20-101	44.7 (1.76)	46.7 (1.84)	62.0 (2.44)	49.0 (1.93)
TL-20-102	30.3 (1.19)	32.3 (1.27)	47.6 (1.87)	34.6 (1.36)
TL-20-103	44.7 (1.76)	46.7 (1.84)	62.0 (2.44)	49.0 (1.93)
TL-20-106	33.9 (1.33)	35.9 (1.41)	51.2 (2.02)	38.2 (1.50)
TL-20-201	41.7 (1.64)	43.7 (1.72)	59.0 (2.32)	46.0 (1.81)
TL-20-202	28.2 (1.11)	30.2 (1.19)	45.5 (1.79)	32.5 (1.28)
TL-20-203	41.7 (1.64)	43.7 (1.72)	59.0 (2.32)	46.0 (1.81)
TL-40-101	30.7 (1.21)	32.7 (1.29)	48.0 (1.89)	35.0 (1.38)
TL-40-103	30.7 (1.21)	32.7 (1.29)	48.0 (1.89)	35.0 (1.38)
TL-40-201	43.7 (1.72)	45.7 (1.80)	61.0 (2.40)	48.0 (1.89)
TL-40-203	43.7 (1.72)	45.7 (1.80)	61.0 (2.40)	48.0 (1.89)


Dimensions in millimeters (inch) unless otherwise stated

chanhvinh.com

TL Draw Latch

Over-center · Wire bail



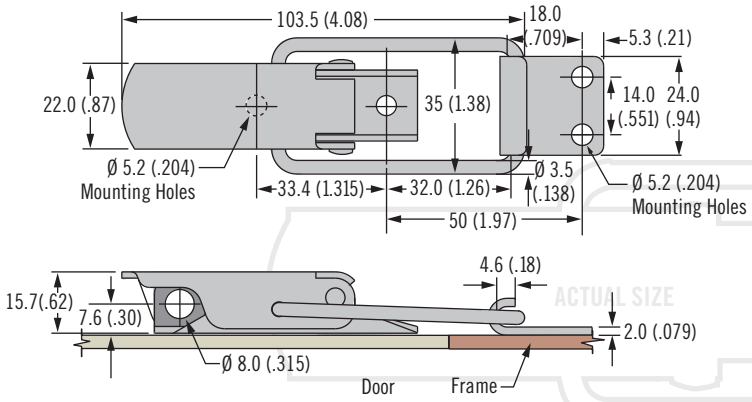

Description	Part Number	
	Steel	Stainless Steel
Latch	TL-50-201-07	TL-50-201-52
Keeper	TL-17-501-07	TL-17-501-52

- **Robust construction**
- **Padlockable**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Working load: 2490 N (560 lbf)

Installation Notes

Install assembly with M5 (No. 10) round head screws (not supplied) or 5 (.196) rivets.

Part Number


See table

Order latch and keeper separately

TL Draw Latch

Over-center · Wire bail



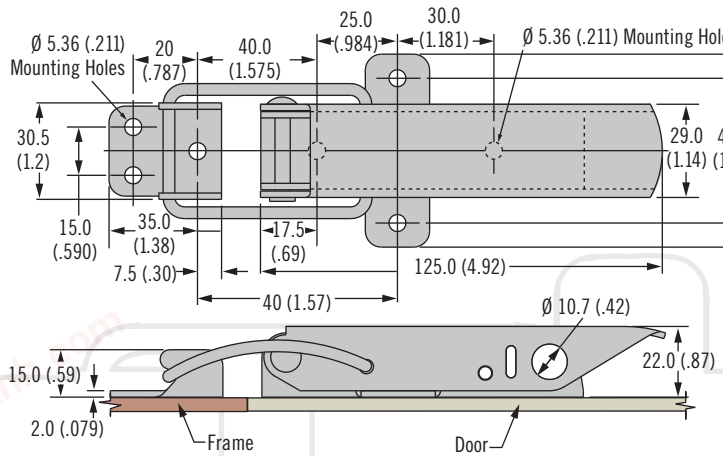

Description	Part Number
Draw Latch	TL-60-102-07
Keeper	TL-17-601-07

- **Robust construction**
- **Padlockable**

Material and Finish

Steel, zinc plated

Performance Details

Working load: 2670 N (600 lbf)

Installation Notes

Install assembly with M5 (No. 10) round head screws (not supplied) or 5 (.196) rivets

Part Number

See table

Order latch and keeper separately