
chanhvinh.com



V2 Draw Latch

Over-center

- **Torsion spring to accommodate application variances**

Material and Finish

Stainless steel or steel, zinc plated


Performance Details

Steel
Clamping force:
330 N (75 lbf) Minimum
700 N (160 lbf) Maximum


Stainless Steel
Clamping force:
260 N (60 lbf) Minimum
530 N (120 lbf) Maximum

Notes


Spring loaded anchor plate compensates up to 2.3 (0.09) for irregularities in sealing and gasket set

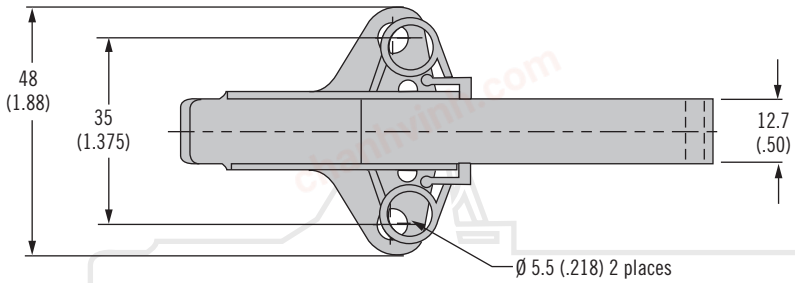


Short Blade

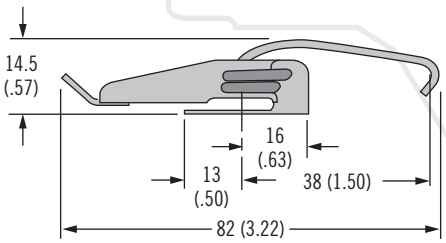


Long Blade

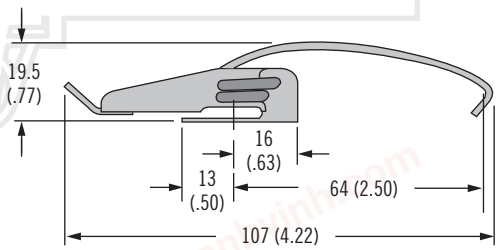


Wire Sealing

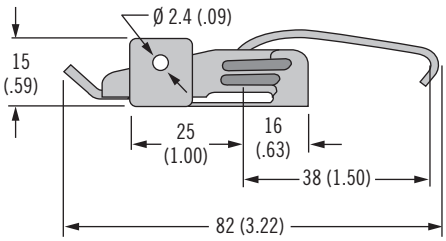


Padlockable

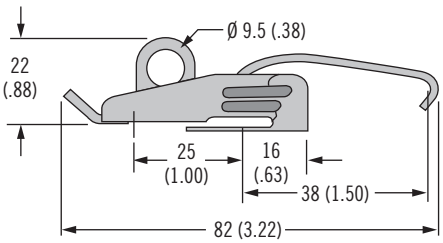

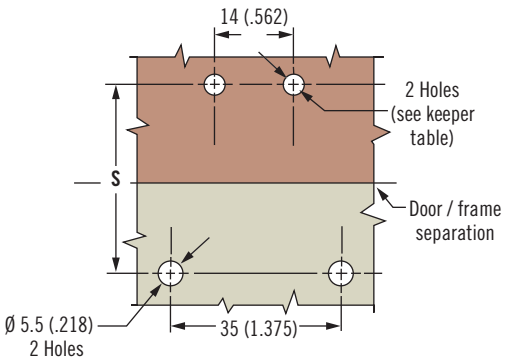

Keeper

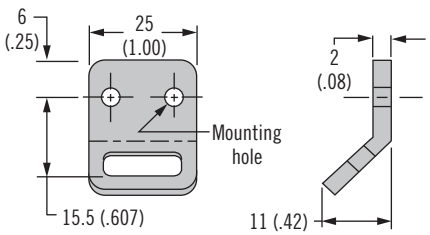

Part Number

See table

Order latch and keeper separately


Description	Style	S Dimension		Part Number	
		Minimum	Maximum	Steel	Stainless Steel
Latch	Short blade	55 (2.17)	57.3 (2.26)	V2-0025-07	V2-0025-52
	Long blade	80.7 (3.17)	83 (3.26)	V2-0068-07	~
	Wire sealing	55 (2.17)	57.3 (2.26)	V2-0034-07	V2-0034-52
	Padlockable	55 (2.17)	57.3 (2.26)	V2-0026-07	V2-0026-52
Keeper	Ø 3.4 (.135) mounting holes			V2-0018-07	V2-0018-52
	Ø 5.5 (.218) mounting holes			V2-0054-07	V2-0054-52


Dimensions in millimeters (inch) unless otherwise stated

chanhvinh.com


V4 Draw Latch

Over-center




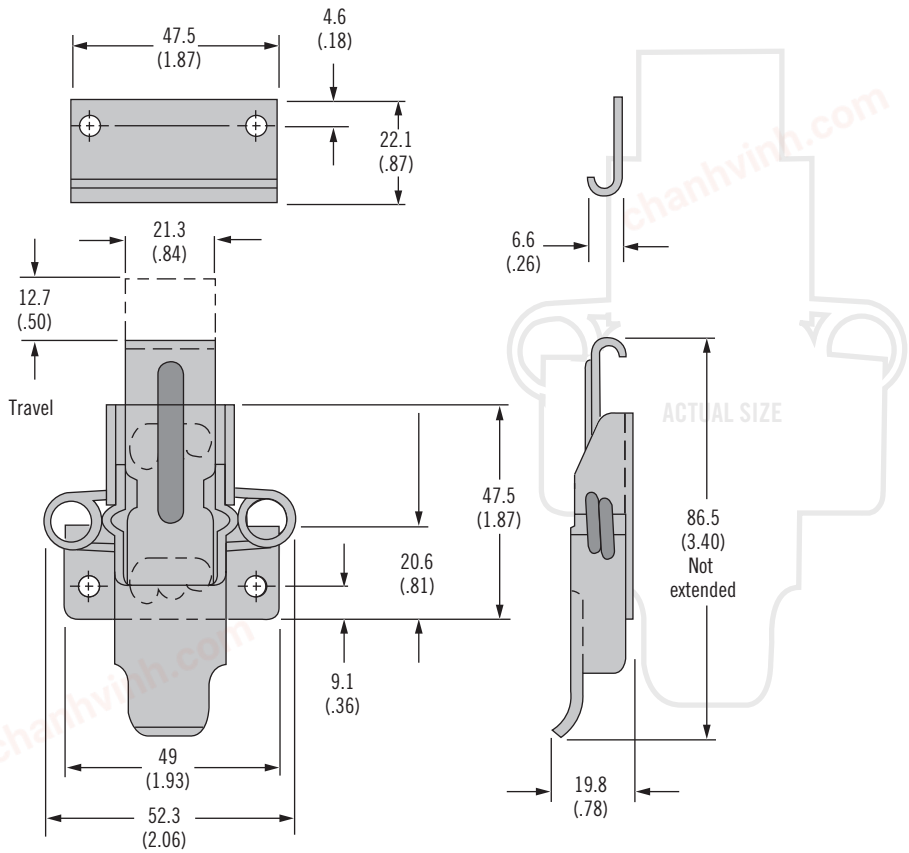

Adjustable Installation

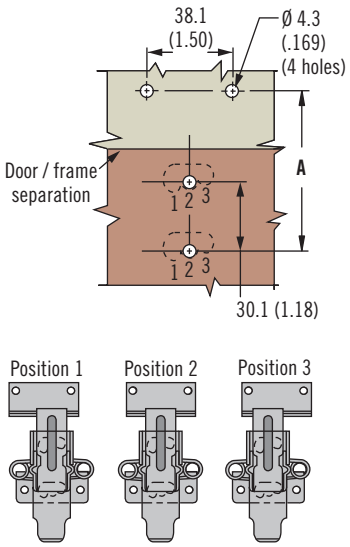

Fixed Installation



Position Number	Dimensions A	
	Minimum	Maximum
1	71.4 (2.81)	73.7 (2.90)
2	69.9 (2.75)	72.1 (2.84)
3	68 (2.68)	70.6 (2.78)

Description	Part Number	
	Steel	Stainless Steel
Latch	V4-0006-02	V4-0006-52
Keeper	V4-0009-02	V4-0009-52

- **Torsion spring to accommodate application variances**

Material and Finish

Stainless steel or steel, zinc plated

Performance Details

Steel

Average ultimate load:
3500 N (786 lbf)

Stainless Steel

Average ultimate load:
3800 N (850 lbf)

Notes

Spring loaded anchor plate compensates up to 2.3 (.09) for irregularities in sealing and gasket set

Part Number

See table

Order latch and keeper separately