
chanhvinh.com

FAST MOVING TECHNOLOGY

# SLK-4N-S25





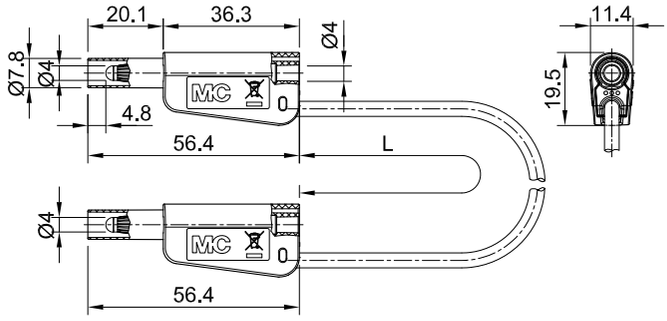


## Item number 66.2016- ☐ *

Highly flexible, with stackable Ø 4 mm MULTILAM plugs with rigid insulating sleeve on both ends.

| Technical data | |
|---|---|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT II, 32 A / 600 V, CAT III, 32 A |
| Surface treatment electrical contact | Ni |
| Base material electrical contact | CuZn |
| Standard color(s) * | 20 21 22 23 24 25 26 27 28 29 30 |
| Lead lengths ☐ | 025; 050; 075; 100; 150; 200 cm |
| Lead insulation | SIL |
| Lead cross section | 2,5 mm² |
| Test accessory acc. to | IEC EN 61010-031 |
| Approvals | UL, CE |

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2022 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**