chanhvinh.com

life.augmented

LDK320

200 mA high accuracy and high PSRR voltage regulator



SOT23-5L



SOT-89

Features

- Input voltage from 2.5 to 18 V
- Very low-dropout voltage (100 mV typ. @ 100 mA load)
- Low quiescent current (typ. 60 µA, 1 µA in off mode)
- High PSRR: 88 dB @ 120 Hz
- Low noise
- Output voltage tolerance: ± 0.5% @ 25 °C (LDK320A) or ± 2% 25 °C
- Output current up to 200 mA
- Wide range of output voltages available on request: fixed from 1.2 V to 12 V with 100 mV step and adjustable
- Logic-controlled electronic shutdown
- Compatible with ceramic capacitor C_{OUT} = 1 µF
- Current, SOA and thermal protections
- Available in SOT23-5L and SOT-89 packages
- Temperature range: -40 °C to 125 °C

Applications

- DSC
- TV
- BD, DVD
- PC
- Industrial

Maturity status link
LDK320

Description

The LDK320 is a low drop voltage regulator, which provides a maximum output current of 200 mA from an input voltage in the range of 2.5 V to 18 V, with a typical dropout voltage of 100 mV.

It is stabilized with a ceramic capacitor on the output.

The very good dynamic characteristic, combined with low drop voltage and low quiescent current make it suitable for low power battery-powered applications.


The enable logic control function allows the LDK320 to be in shutdown mode by consuming a total current lower than 1 µA.

This device also includes a short-circuit current limiting, thermal and SOA protections.

chanhvinh.com


1 Diagram

Figure 1. Block diagram (fixed version)

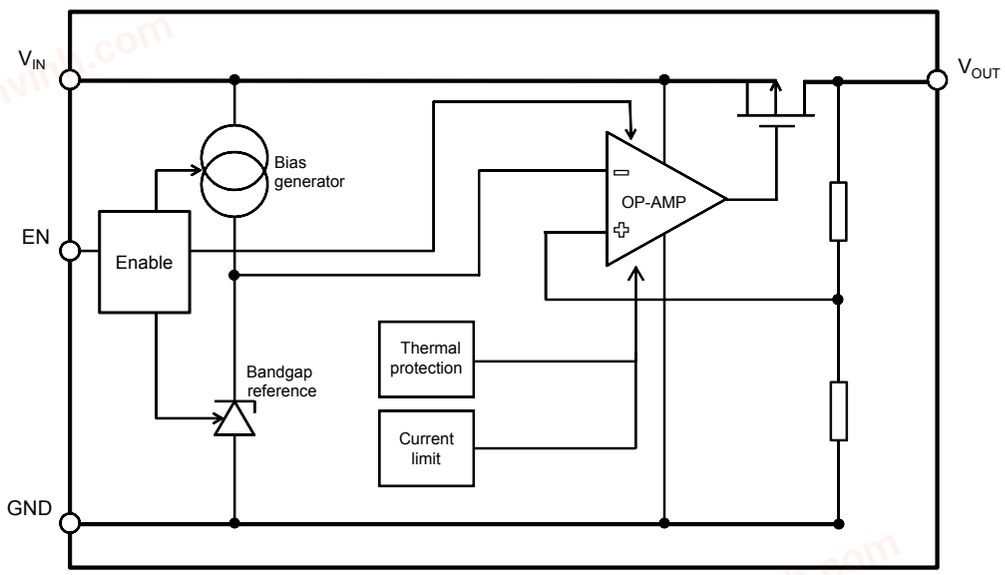

GIPD030820151330MT


Figure 2. Block diagram (adjustable version)

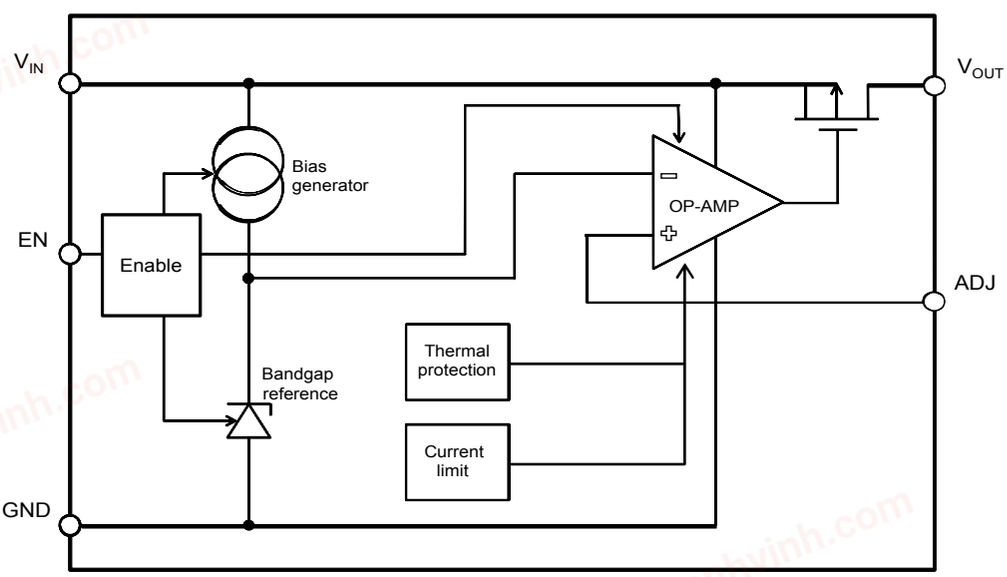

chanhvinh.com

2 Pin configuration

Figure 3. **Pin connection (top view)**

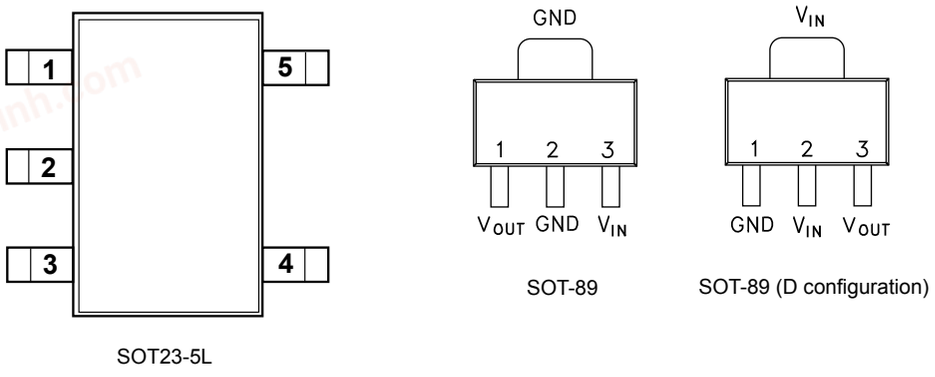

GIPD030820151343MT

Table 1. **Pin description (SOT23-5L)**

Pin n°	Symbol	Function
1	IN	Input voltage of the LDO
2	GND	Common ground
3	EN	Enable pin logic input: low = shutdown, high = active
4	ADJ/NC	Adjustable pin on ADJ version, not connected on fixed version
5	OUT	Output voltage of the LDO

Table 2. **Pin description (SOT-89)**

Pin n°	Symbol	Function
1	OUT	Output voltage of the LDO
2	GND	Common ground
3	IN	Input voltage of the LDO
TAB	GND	Common ground


Table 3. **Pin description (SOT-89, D configuration)**

Pin n°	Symbol	Function
1	GND	Common ground
2	IN	Input voltage of the LDO
3	OUT	Output voltage of the LDO
TAB	IN	Input voltage of the LDO

chanhvinh.com

3 Typical application

Figure 4. Typical application circuits

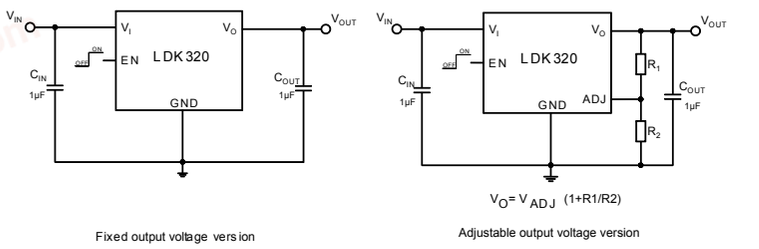

Fixed output voltage version

Adjustable output voltage version

GIPD030820151358MT

Note: Adjustable version and enable pin are not available on SOT-89 package.

chanhvinh.com

4 Maximum ratings

Table 4. Absolute maximun ratings

Symbol	Parameter	Value	Unit
V_{IN}	DC input voltage	- 0.3 to 20	V
V_{OUT}	DC output voltage	- 0.3 to V_I + 0.3	V
V_{EN}	Enable input voltage	- 0.3 to V_I + 0.3	V
V_{ADJ}	ADJ pin voltage	- 0.3 to 2	V
I_{OUT}	Output current	Internally limited	mA
P_D (1)	Power dissipation	Internally limited	mW
T_{STG}	Storage temperature range	- 65 to 150	°C
T_{OP}	Operating junction temperature range	- 40 to 125	°C

1. *Maximum power dissipation must be calculated by taking into account the package and thermal performance.*

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.

Table 5. Thermal data

Symbol	Parameter	SOT23-5L	SOT-89	Unit
R_{thJA}	Thermal resistance junction-ambient	160	110	°C/W
R_{thJC}	Thermal resistance junction-case	68	15	°C/W

chanhvinh.com

5 Electrical characteristics

T_J = 25 °C, V_{IN} = $V_{OUT(NOM)}$ + 1 V, C_{IN} = C_{OUT} = 1 µF, I_{OUT} = 1 mA, V_{EN} = V_{IN}, unless otherwise specified.

Table 6. LDK320 electrical characteristics (fixed output version)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IN}	Operating input voltage		2.5		18	V
V_{OUT}	V_{OUT} accuracy	T_J = 25 °C	-2		2	%
		-40 °C < T_J < 125 °C	-3		3	%
	V_{OUT} accuracy, LDK320A	T_J = 25 °C	-0.5		0.5	%
		-40 °C < T_J < 125 °C	-1.5		1.5	%
ΔV_{OUT}	Static line regulation	V_{OUT} +1 V ≤ V_{IN} ≤ 18 V		0.001	0.05	%/V
ΔV_{OUT}	Static load regulation (SOT23-5L)	I_{OUT} = 1 mA to 200 mA, V_{OUT} ≤ 2 V		10	15	mV
		I_{OUT} = 1 mA to 200 mA, V_{OUT} > 2 V		0.001	0.003	%/mA
ΔV_{OUT}	Static load regulation (SOT-89)	I_{OUT} = 1 mA to 200 mA, V_{OUT} ≤ 2 V		10	25	mV
		I_{OUT} = 1 mA to 200 mA, V_{OUT} > 2 V		0.001	0.004	%/mA
V_{DROP}	Dropout voltage (1)	I_{OUT} = 100 mA, V_{OUT} = 3.3 V		100		
		I_{OUT} = 200 mA, V_{OUT} = 3.3 V 40 °C < T_J < 125 °C		200	350	mV
e_N	Output noise voltage	10 Hz to 100 kHz, I_{OUT} = 10 mA		63		$\mu V_{RMS}/V$
SVR	Supply voltage rejection	f = 120 Hz, I_{OUT} = 10 mA, V_{OUT} = 3.3 V		88		dB
		f = 1 kHz I_{OUT} = 10 mA, V_{OUT} = 3.3 V		65		
		f = 10 kHz, I_{OUT}= 10 mA V_{OUT} = 3.3 V		48		
I_Q	Quiescent current	V_{OUT} +1 V V_{IN} 18 V, I_{OUT} = 0 mA, -40 °C < T_J < 125 °C		60	90	µA
		V_{IN} = V_{OUT} +1 V I_{OUT} = 200 mA, -40 °C < T_J < 125 °C		70	100	
		V_{IN} input current in OFF mode: V_{EN} = G_{ND} T_J = 25 °C		0.2	1	

chanhvinh.com

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SC}	Short-circuit current	R_L = 0		330		mA
		R_L = 0, V_{IN} = 16 V		200		
V_{EN}	Enable input logic low	V_{IN} = 2.5 V to 18 V, -40 °C < T_J < 125 °C			0.4	V
	Enable input logic high	V_{IN} = 2.5 V to 18 V, -40 °C < T_J < 125 °C	1.2			
I_{EN}	Enable pin input current	V_{EN} = V_{IN}		0.1	100	nA
T_{SHDN}	Thermal shutdown			160		°C
	Hysteresis			20		
C_{OUT}	Output capacitor	Capacitance (see Section 6 Typical characteristics)	1		22	µF

1. *Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value.*

T_J = 25 °C, V_{IN} = 2.5 V, C_{IN} = C_{OUT} = 1 µF, I_{OUT} = 1 mA, V_{EN} = V_{IN}, unless otherwise specified.

chanhvinh.com

Table 7. **LDK320 electrical characteristics (ADJ version)**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IN}	Operating input voltage		2.5		18	V
V_{ADJ}	Adjustable voltage	T_J = 25 °C		1.185		V
	Adjustable voltage accuracy	T_J = 25 °C	-2		+2	%
		40 °C < T_J < 125 °C	-3		+3	
	Adjustable voltage, LDK320A	T_J = 25 °C		1.2		V
	Adjustable voltage accuracy, LDK320A	T_J = 25 °C	-0.5		+0.5	%
		40 °C < T_J < 125 °C	-1.5		+1.5	
ΔV_{OUT}	Static line regulation	V_{OUT} + 1 V ≤ V_{IN} ≤ 18 V		0.001	0.05	%/V
ΔV_{OUT}	Static load regulation	I_{OUT} = 1 mA to 200 mA		0.0002	0.003	%/mA
V_{DROP}	Dropout voltage (1)	I_{OUT} = 100 mA, V_{OUT} = 3.3 V		100		mV
		I_{OUT} = 200 mA, V_{OUT} = 3.3 V 40 °C < T_J < 125 °C		200	350	
e_N	Output noise voltage	10 Hz to 100 kHz I_{OUT} = 10 mA		60		μV_{RMS}
I_{ADJ}	Adjust pin current				1	µA
SVR	Supply voltage rejection	f = 120 Hz I_{OUT} = 10 mA, V_{OUT} = V_{ADJ}		83		dB
		f = 1 kHz I_{OUT} = 10 mA, V_{OUT} = V_{ADJ}		73		
		f = 10 kHz I_{OUT} = 10 mA, V_{OUT} = V_{ADJ}		58		
I_Q	Quiescent current	V_{OUT} +1 V ≤ V_{IN} ≤ 18 V, I_{OUT} = 0 mA, -40 °C < T_J < 125 °C		50	90	µA
		V_{IN} = V_{OUT} + 1 V, I_{OUT} = 200 mA, -40 °C < T_J < 125 °C		60	100	
		V_{IN} input current in OFF mode: V_{EN} = GND, T_J = 25 °C		0.2	1	
I_{SC}	Short-circuit current	R_L = 0		330		mA
		R_L = 0, V_{IN} = 16 V		200		
V_{EN}	Enable input logic low	V_{IN} = 2.5 V to 18 V, -40 °C < T_J < 125 °C			0.4	V
	Enable input logic high	V_{IN} = 2.5 V to 18 V, -40 °C < T_J < 125 °C	1.2			
I_{EN}	Enable pin input current	V_{EN} = V_{IN}		0.1	100	nA
T_{SHDN}	Thermal shutdown			160		°C
	Hysteresis			20		

chanhvinh.com


Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{OUT}	Output capacitor	Capacitance (see Section 6 Typical characteristics)	1		22	µF

chanhvinh.com

6 Typical characteristics


Unless otherwise specified: T_J = 25 °C, V_{IN} = $V_{OUT(NOM)}$ + 1 V, C_{IN} = C_{OUT} = 1 µF.

Figure 5. Output voltage vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 mA)

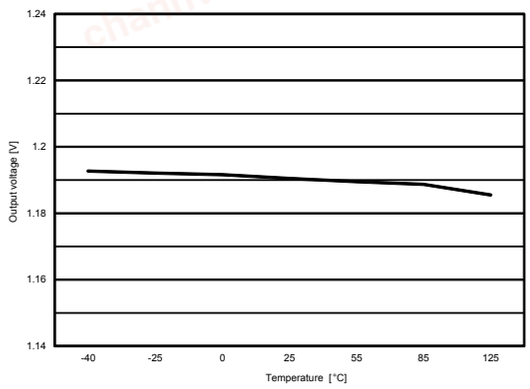


GIPD040820151207MT

Figure 6. Output voltage vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 200 mA)

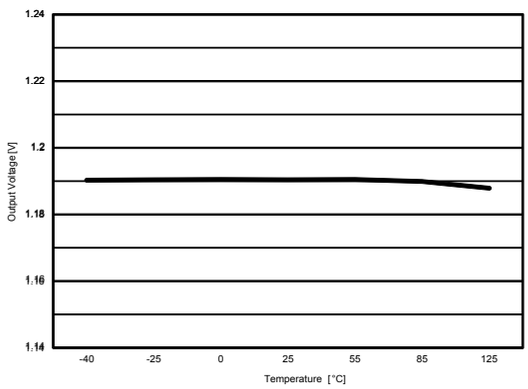


GIPD040820151208MT

Figure 7. Output voltage vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 1 mA)

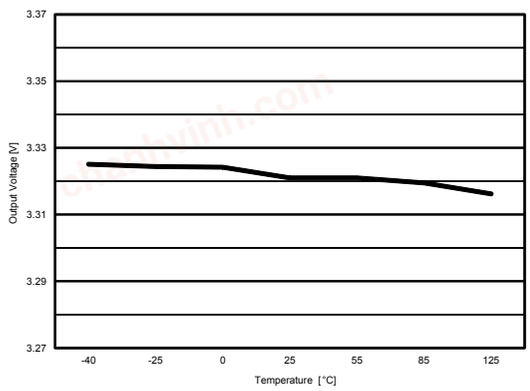

GIPD040820151209MT


Figure 8. Output voltage vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 200 mA)

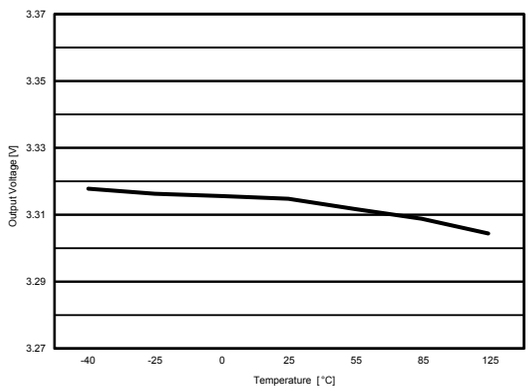

GIPD040820151210MT


chanhvinh.com

Figure 9. Line regulation vs. temperature (V_{IN} = 4.3 to 18 V, V_{OUT} = 3.3 V, I_{OUT} = 1 mA)

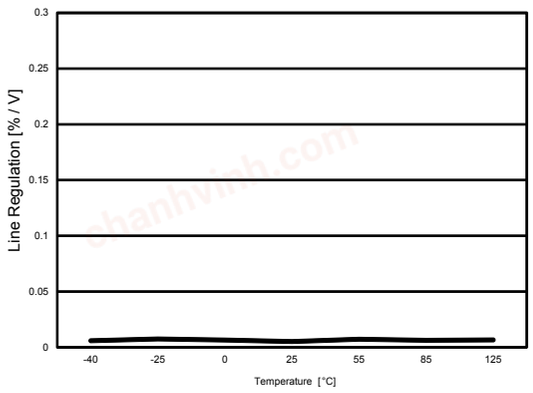


GIPD040820151211MT

Figure 10. Line regulation vs. temperature (V_{IN} = 2.5 to 18 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 mA)

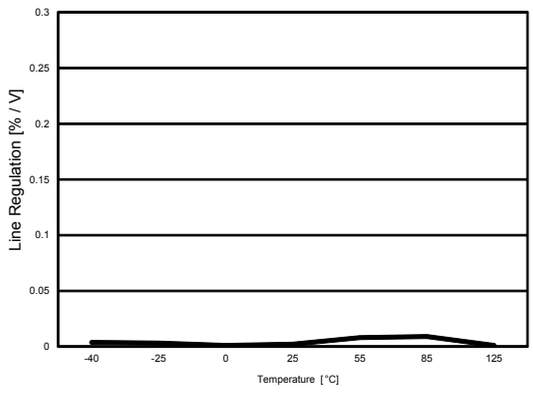


GIPD040820151212MT

Figure 11. Load regulation vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 1 to 200 mA)

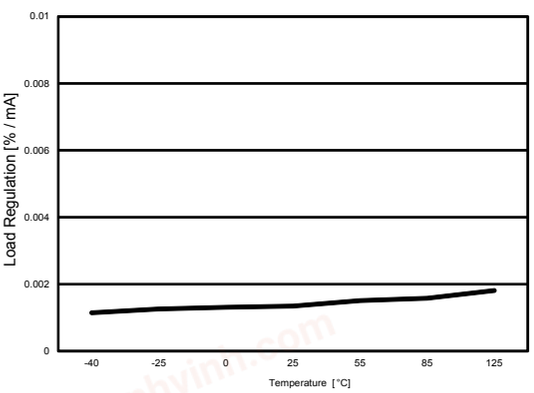


GIPD040820151213MT

Figure 12. Load regulation vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 to 200 mA)

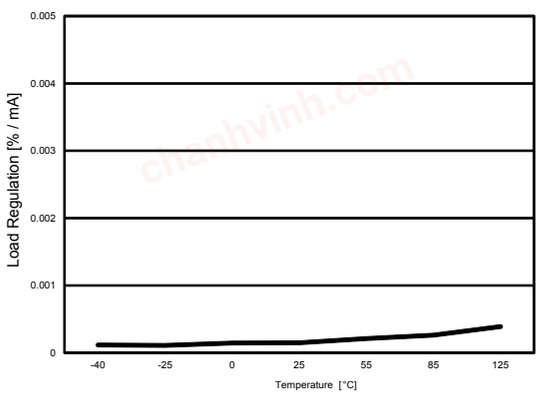


GIPD040820151214MT

Figure 13. Enable thresholds vs. temperature (I_{OUT} = 1 mA)

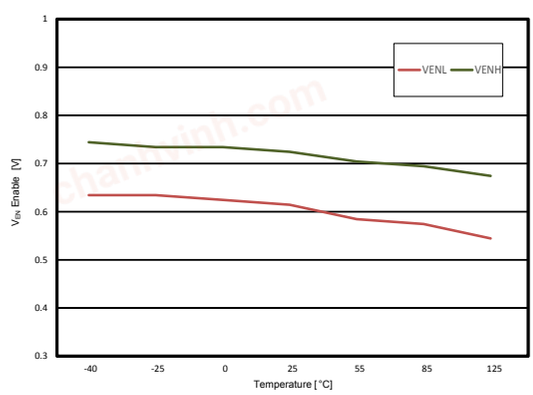

GIPD040820151215MT


Figure 14. Dropout voltage vs. temperature

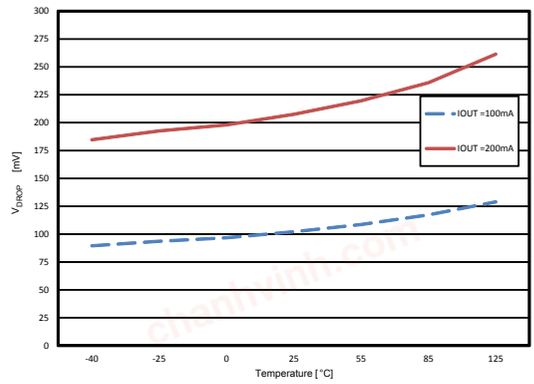

GIPD040820151216MT


chanhvinh.com

Figure 15. Quiescent current vs. input voltage (I_{OUT} = 1 mA)

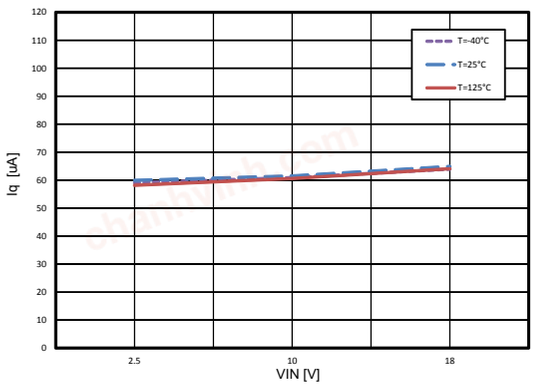


GIPD040820151217MT

Figure 16. Quiescent current vs. temperature (I_{OUT} = 1 mA)

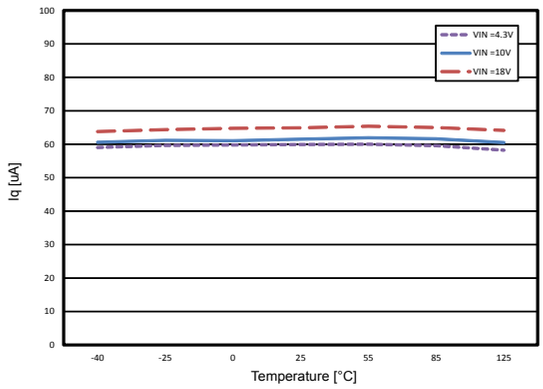


GIPD040820151218MT

Figure 17. Quiescent current vs. output current (V_{IN} = 4.3 V)

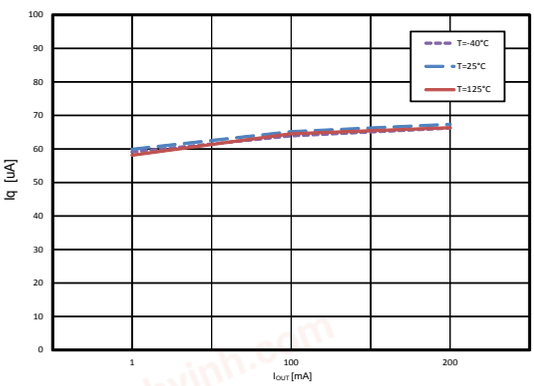


GIPD040820151219MT

Figure 18. Quiescent current vs. temperature (I_{OUT} = 200 mA)

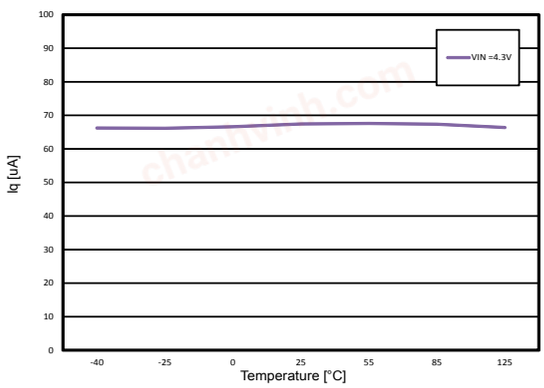


GIPD040820151220MT

Figure 19. Off-state current vs. temperature

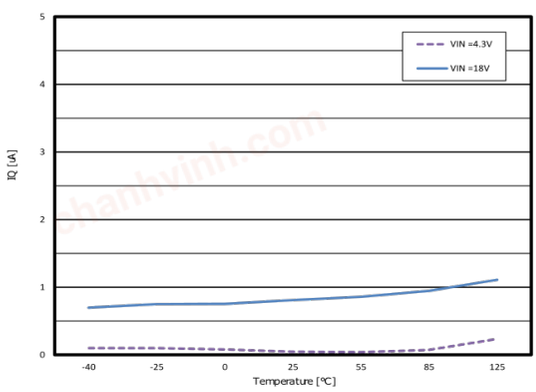

GIPD040820151221MT


Figure 20. Short-circuit current vs. temperature (V_{IN} = 4.3 V)

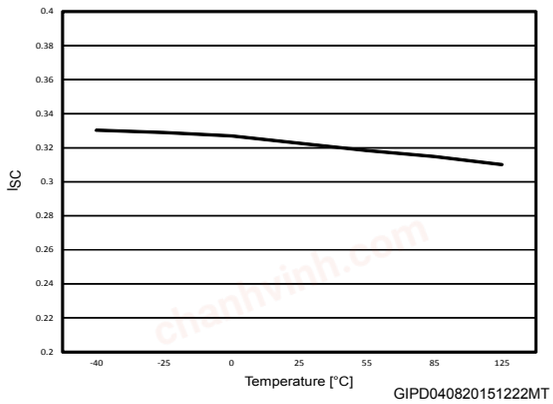

GIPD040820151222MT


chanhvinh.com

Figure 21. Dropout voltage vs. I_{OUT}

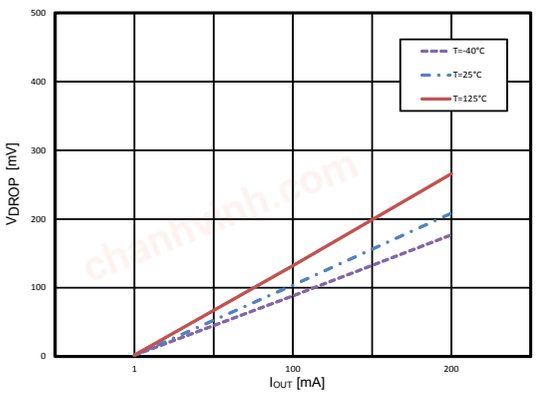


GIPD040820151223MT

Figure 22. Short-cicuit current vs. drop voltage

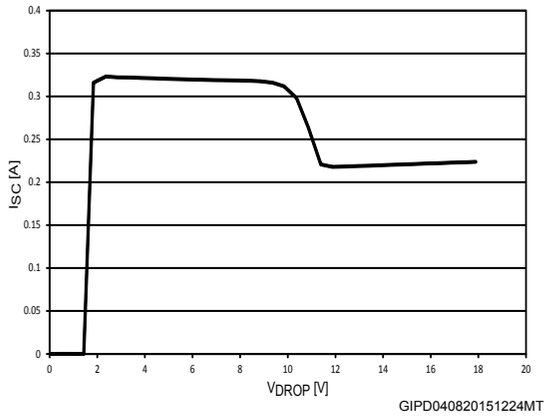


GIPD040820151224MT

Figure 23. SVR vs. frequency

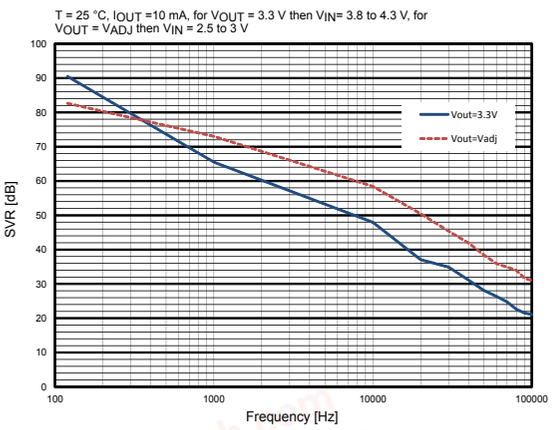


GIPD040820151225MT

Figure 24. Output noise spectral density

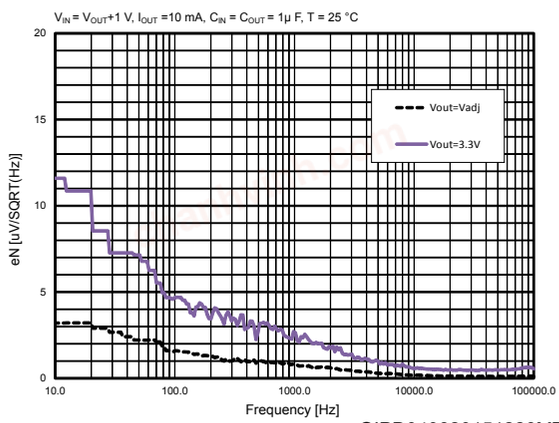


GIPD040820151226MT

Figure 25. Stability plan (V_{OUT} = 3.3 V)

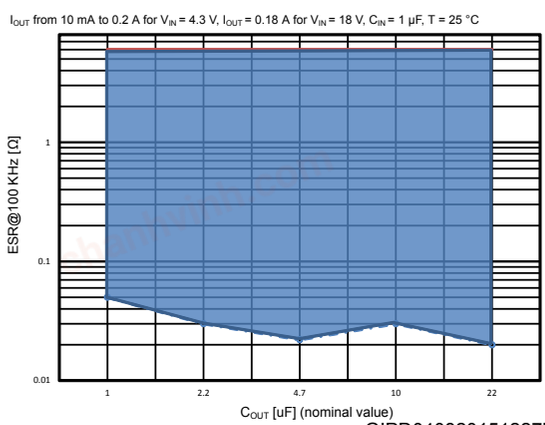

GIPD040820151227MT

Figure 26. Stability plan (V_{OUT} = V_{ADJ})

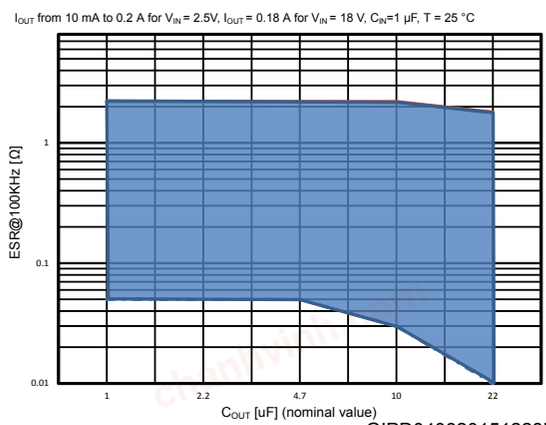


GIPD040820151228MT

chanhvinh.com

Figure 27. Startup with enable (V_{OUT} = 3.3 V)


VIN = 4.3 V, VEN = from 0 to Vin, IOUT = 200 mA, CIN = COUT = 1 µF trise = tfall = 1 µs

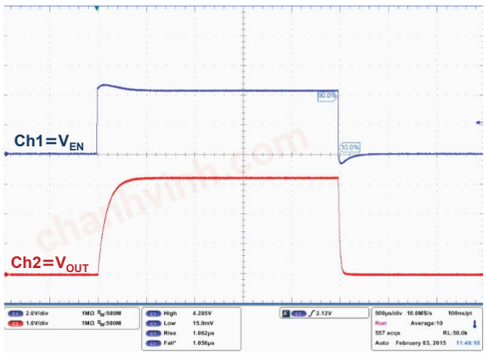

GIPD040820151229MT

Figure 28. Startup with enable (V_{OUT} = V_{ADJ})


V_{IN} = 18 V, V_{EN} = from 0 to V_{in}, I_{OUT} =200 mA, C_{IN} = C_{OUT} =1 µF trise = t_{fall} = 1 µs

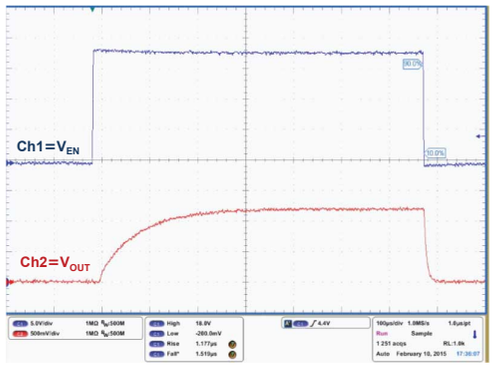

GIPD040820151230MT

Figure 29. Turn-on time (V_{OUT} = 3.3 V)


V_{IN} = V_{EN} = from 0 to 4.3 V, I_{OUT} = 200 mA, C_{IN} = C_{OUT} = 1 µF, T_{rise} = 1 µs

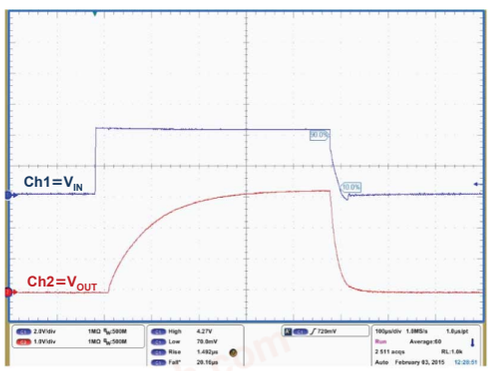

GIPD040820151231MT

Figure 30. Turn-on time (V_{OUT} = V_{ADJ})


V_{IN} = V_{EN} = from 0 to 18 V, I_{OUT} = 200 mA V_{OUT} = V_{REF}, C_{IN} = C_{OUT} = 1 µF T_{rise} = 5 µs

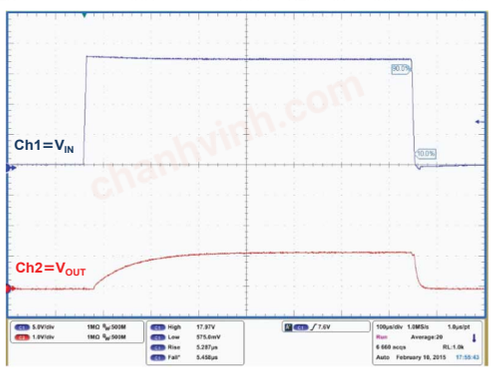

GIPD040820151232MT

Figure 31. Line transient (V_{OUT} = 3.3 V, rise)


V_{IN} = V_{EN} = from 4.3 to 8.3 V, I_{OUT} = 10 mA, C_{IN} = C_{OUT} = 1 µF T_{rise} = 5 µs

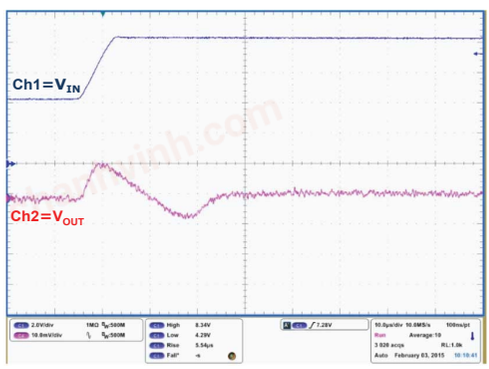

GIPD040820151233MT

Figure 32. Line transient (V_{OUT} = 3.3 V, fall)

V_{IN} = V_{EN} = from 4.3 to 8.3 V, I_{OUT} =10 mA, C_{IN} = C_{OUT} =1 µF T_{fall} = 5 µs

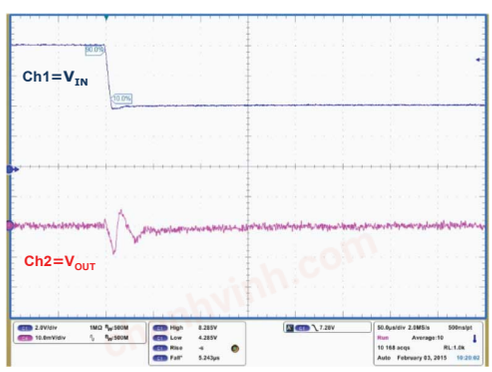


GIPD040820151234MT

chanhvinh.com

Figure 33. Load transient (V_{OUT} = 3.3 V, rise)


V_{IN} = V_{EN} = 4.3 V, I_{OUT} = from 1 to 200 mA, C_{IN} = C_{OUT} = 1 µF T_{rise} = 5 µs

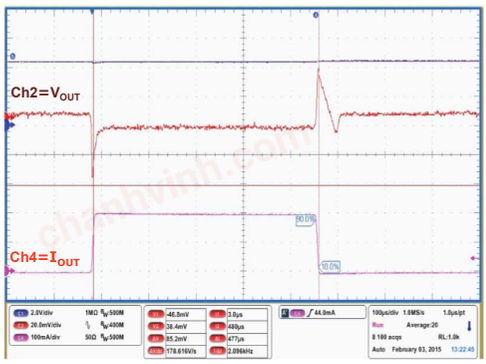

GIPD040820151236MT

Figure 34. Load transient (V_{OUT} = V_{ADJ}, fall)

V_{IN} = V_{EN} = 2.5 V, I_{OUT} = from 1 to 200 mA, C_{IN} = C_{OUT} = 1 µF T_{rise} - T_{fall} = 5 µs

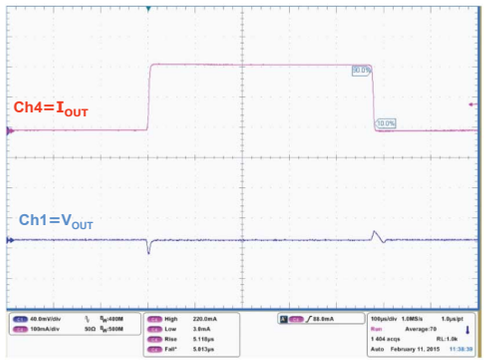

GIPD040820151237bMT

chanhvinh.com

7 Package information


In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com

chanhvinh.com

7.1 SOT23-5L package information

Figure 35. **SOT23-5L package outline**

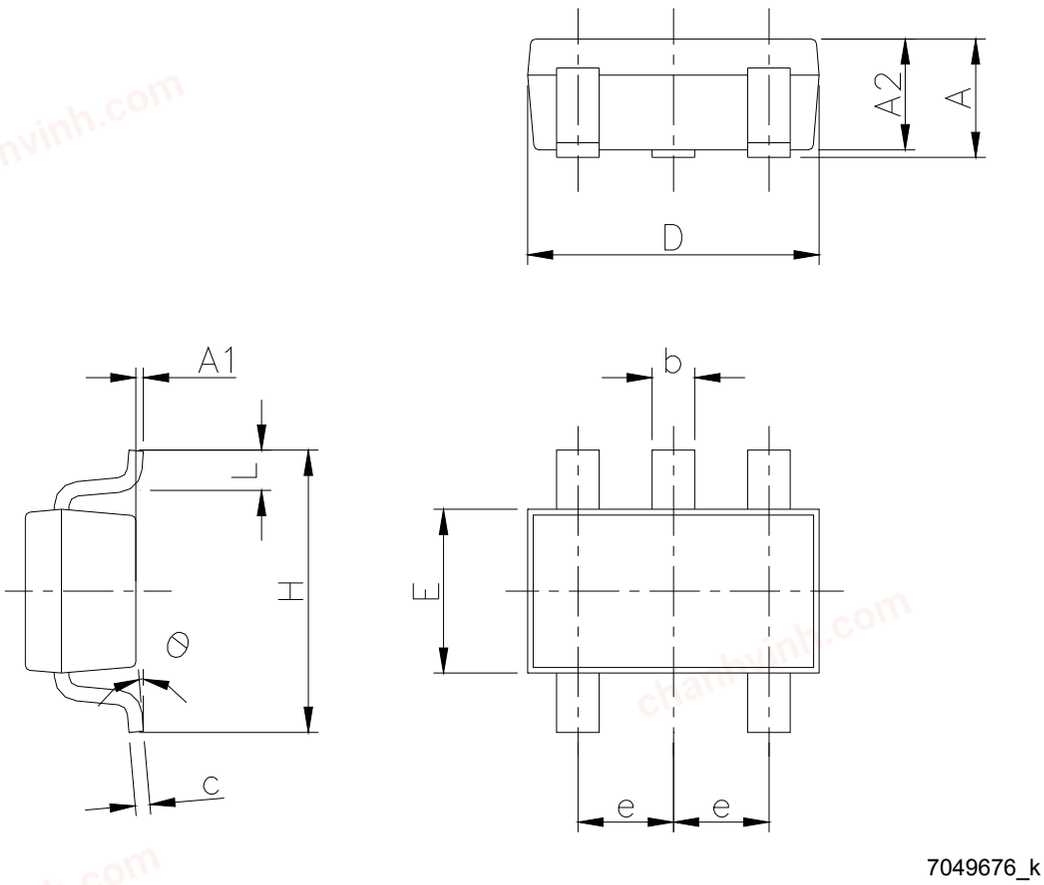


7049676_k

Table 8. **SOT23-5L package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	0.90		1.45
A1	0		0.15
A2	0.90		1.30
b	0.30		0.50
c	0.09		0.20
D		2.95	
E		1.60	
e		0.95	
H		2.80	
L	0.30		0.60
θ	0°		8°

chanhvinh.com


Figure 36. **SOT23-5L recommended footprint**

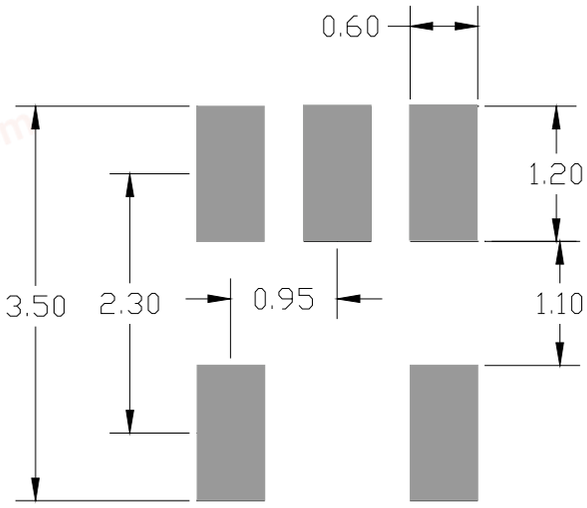

Note: Dimensions are in mm

7.2 SOT23-5L packing information

Figure 37. **SOT23-5L tape and reel outline**

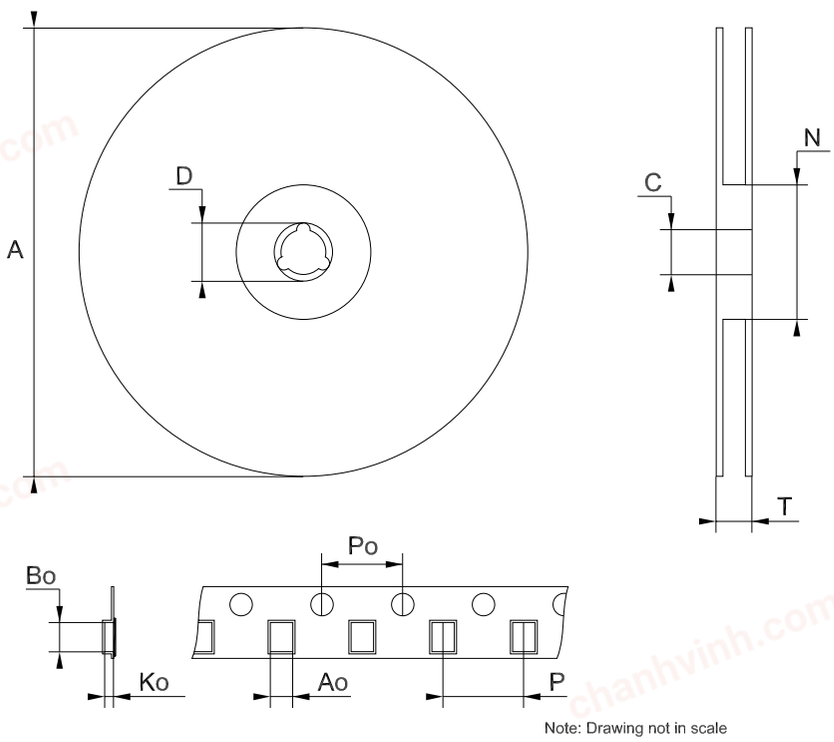

chanhvinh.com


Table 9. **SOT23-5L tape and reel mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A			180
C	12.8	13.0	13.2
D	20.2		
N	60		
T			14.4
Ao	3.13	3.23	3.33
Bo	3.07	3.17	3.27
Ko	1.27	1.37	1.47
Po	3.9	4.0	4.1
P	3.9	4.0	4.1

chanhvinh.com

7.3 SOT-89 package information

Figure 38. **SOT-89 package outline**

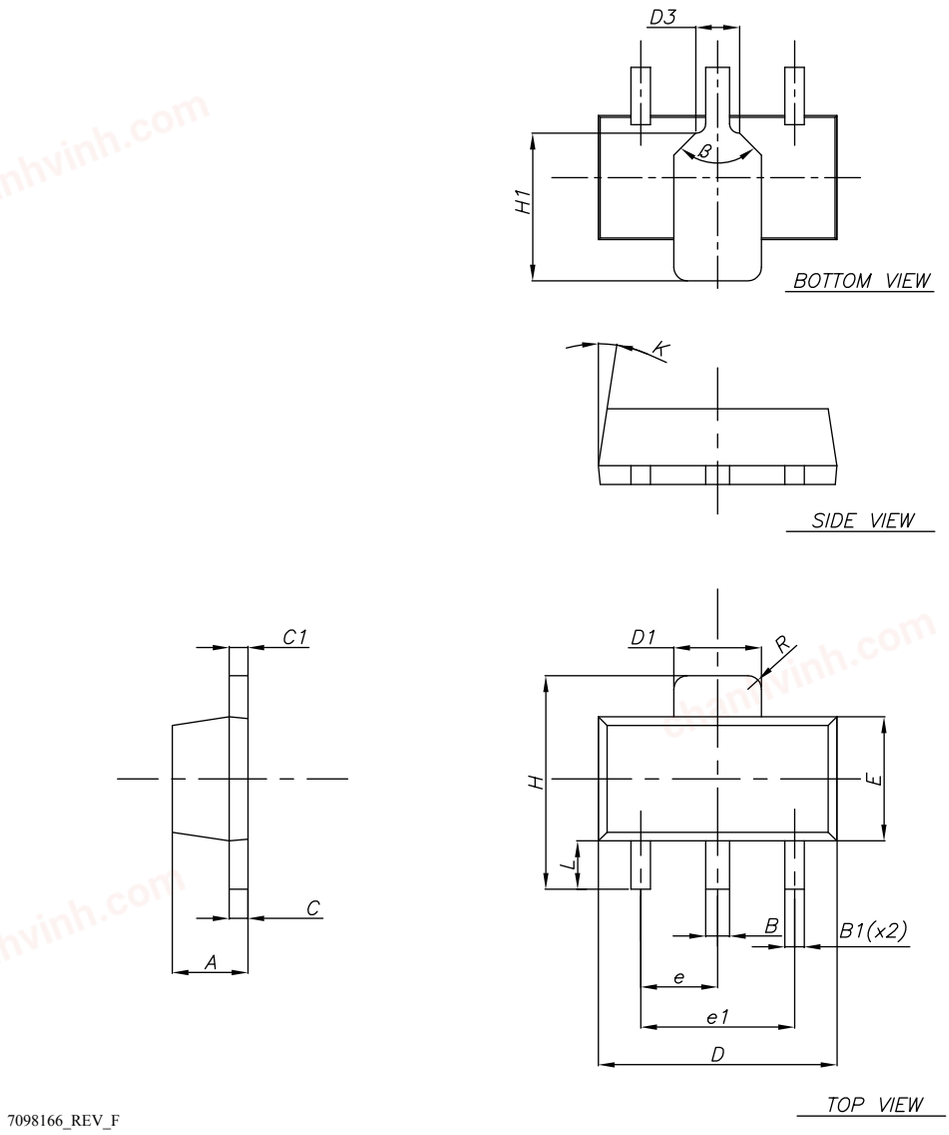


chanhvinh.com

Table 10. **SOT-89 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	1.40		1.60
B	0.44		0.56
B1	0.36		0.48
C	0.35		0.44
C1	0.35		0.44
D	4.40		4.60
D1	1.62		1.83
D3		0.90	
E	2.29		2.60
e	1.42		1.57
e1	2.92		3.07
H	3.94		4.25
H1	2.70		3.10
K	1°		8°
L	0.89		120
R		0.25	
β		90°	

chanhvinh.com

Figure 39. **SOT-89 recommended footprint**

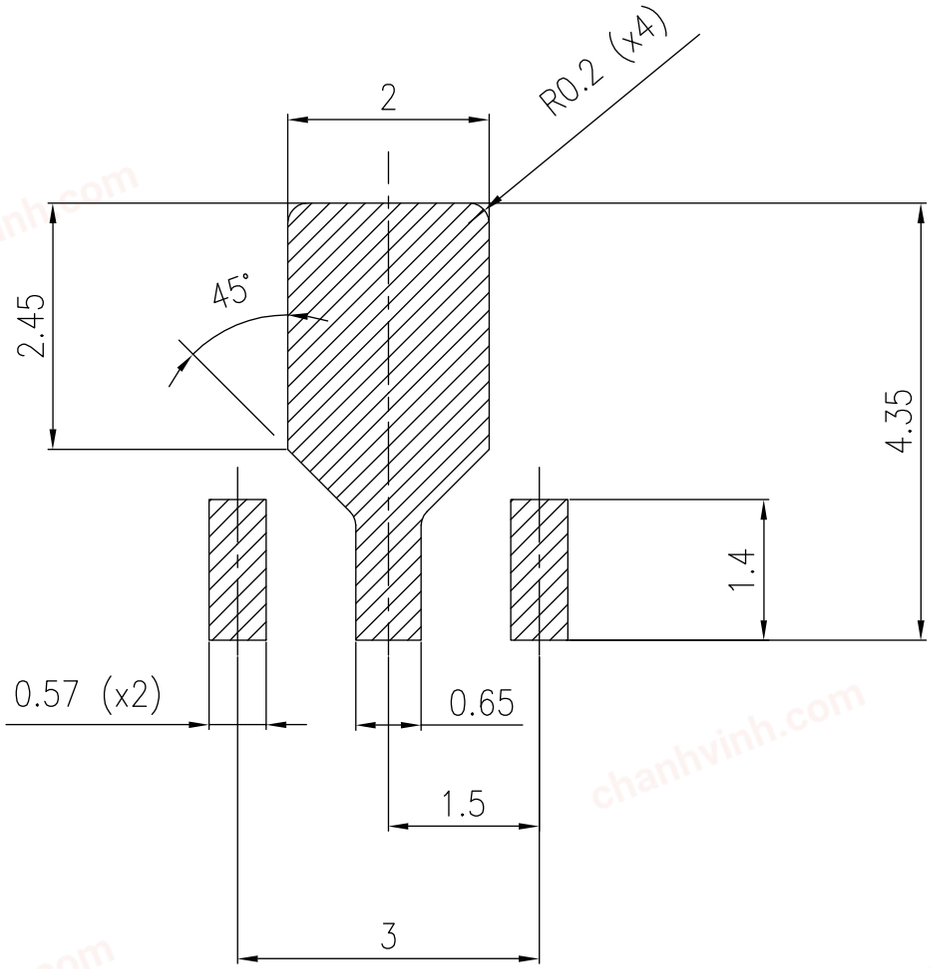

Footprint

chanhvinh.com

7.4 SOT-89 packing information

Figure 40. **SOT-89 carrier tape outline**

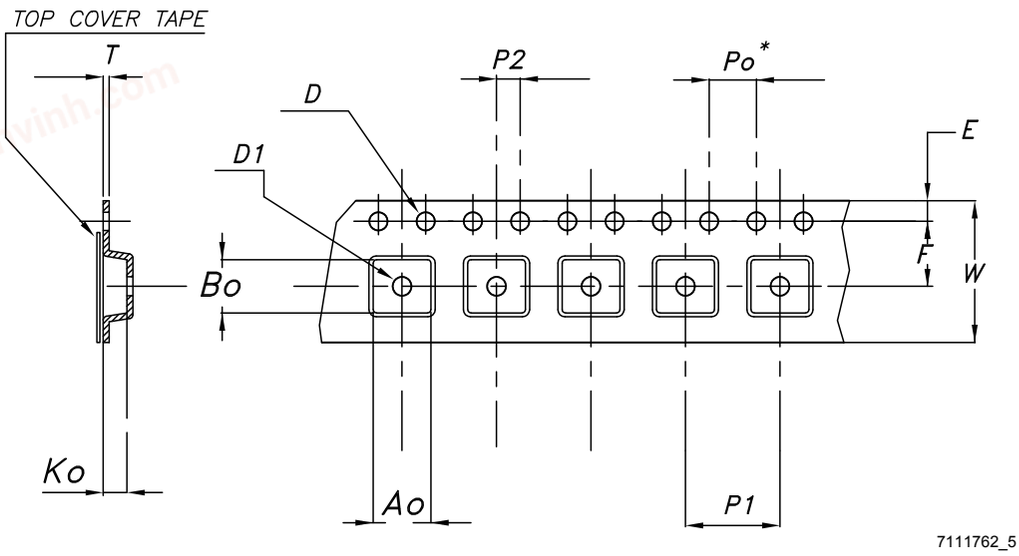


Table 11. **SOT-89 carrier tape mechanical data**

Dim.	mm	
	Value	Tolerance
Ao	4.91	± 0.10
Bo	4.52	± 0.10
Ko	1.90	± 0.10
F	5.50	± 0.10
E	1.75	± 0.10
W	12	± 0.30
P2	2	± 0.10
Po	4	± 0.10
P1	8	± 0.10
T	0.30	± 0.10
D	Ø 1.55	± 0.05
D1	Ø 1.60	± 0.10

chanhvinh.com

8 Ordering information

Table 12. **Order code**

SOT23-5L	SOT-89 (D configuration)	SOT-89	Marking	Accuracy (%)	Output voltage
LDK320AM-R			ADA	0.5	ADJ
LDK320M-R			KAD	2	
LDK320AM12R (1)				0.5	1.2
LDK320M12R (1)				2	
LDK320AM15R (1)			15A	0.5	1.5
LDK320AM18R (1)			18A	0.5	1.8
LDK320M18R			K18	2	
LDK320AM25R			25A	0.5	2.5
LDK320M25R			K25	2	
LDK320AM30R			30A	0.5	3
	LDK320ADU30R		30	0.5	
LDK320M30R			K30	2	
LDK320AM33R			33A	0.5	3.3
	LDK320ADU33R		33	0.5	
LDK320M33R			K33	2	
LDK320AM36R			36A	0.5	3.6
LDK320AM50R			50A	0.5	5
	LDK320ADU50R		50	0.5	
		LDK320AU50R	E0	0.5	
LDK320M50R			K50	2	
LDK320AM120R			120A	0.5	12
	LDK320ADU120R		A2	0.5	
LDK320M120R (1)				2	

1. *Available on request.*

chanhvinh.com

Revision history

Table 13. **Document revision history**

Date	Revision	Changes
16-Nov-2015	1	First release.
01-Jun-2016	2	Document status promoted from preliminary data to production data. Updated title and features in cover page. Updated Section 8: “Ordering information”. Minor text changes.
05-Jul-2017	3	Updated Section 8: "Ordering information". Minor text changes.
09-Oct-2018	4	Updated ΔV_{OUT} test condition in Table 6. LDK320 electrical characteristics (fixed output version). Added new order code LDK320AU50R in Table 12. Order code.
28-Oct-2019	5	Added ΔV_{OUT} for SOT-89 in Table 6. LDK320 electrical characteristics (fixed output version).
23-Jul-2020	6	Updated Figure 2. Block diagram (adjustable version).
10-Nov-2020	7	Updated Table 12. Order code.
12-Nov-2020	8	Added new Marking column in Table 12. Order code.

chanhvinh.com

Contents

1 Diagram 2
2 Pin configuration 3
3 Typical application 4
4 Maximum ratings 5
5 Electrical characteristics 6
6 Typical characteristics 10
7 Package information 16
7.1 SOT23-5L package information 17
7.2 SOT23-5L packing information 18
7.3 SOT-89 package information 20
7.4 SOT-89 packing information 23
8 Ordering information 24
Revision history 25
Contents 26
List of tables 27
List of figures 28

chanhvinh.com

List of tables

Table 1. Pin description (SOT23-5L) . . . 3
Table 2. Pin description (SOT-89) . . . 3
Table 3. Pin description (SOT-89, D configuration) . . . 3
Table 4. Absolute maximun ratings . . . 5
Table 5. Thermal data . . . 5
Table 6. LDK320 electrical characteristics (fixed output version) . . . 6
Table 7. LDK320 electrical characteristics (ADJ version) . . . 8
Table 8. SOT23-5L package mechanical data . . . 17
Table 9. SOT23-5L tape and reel mechanical data . . . 19
Table 10. SOT-89 mechanical data . . . 21
Table 11. SOT-89 carrier tape mechanical data . . . 23
Table 12. Order code . . . 24
Table 13. Document revision history . . . 25

chanhvinh.com

List of figures

Figure 1. Block diagram (fixed version) . . . 2
Figure 2. Block diagram (adjustable version) . . . 2
Figure 3. Pin connection (top view) . . . 3
Figure 4. Typical application circuits . . . 4
Figure 5. Output voltage vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 mA) . . . 10
Figure 6. Output voltage vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 200 mA) . . . 10
Figure 7. Output voltage vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 1 mA) . . . 10
Figure 8. Output voltage vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 200 mA) . . . 10
Figure 9. Line regulation vs. temperature (V_{IN} = 4.3 to 18 V, V_{OUT} = 3.3 V, I_{OUT} = 1 mA) . . . 11
Figure 10. Line regulation vs. temperature (V_{IN} = 2.5 to 18 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 mA) . . . 11
Figure 11. Load regulation vs. temperature (V_{IN} = 4.3 V, V_{OUT} = 3.3 V, I_{OUT} = 1 to 200 mA) . . . 11
Figure 12. Load regulation vs. temperature (V_{IN} = 2.5 V, V_{OUT} = V_{ADJ}, I_{OUT} = 1 to 200 mA) . . . 11
Figure 13. Enable thresholds vs. temperature (I_{OUT} = 1 mA) . . . 11
Figure 14. Dropout voltage vs. temperature . . . 11
Figure 15. Quiescent current vs. input voltage (I_{OUT} = 1 mA) . . . 12
Figure 16. Quiescent current vs. temperature (I_{OUT} = 1 mA) . . . 12
Figure 17. Quiescent current vs. output current (V_{IN} = 4.3 V) . . . 12
Figure 18. Quiescent current vs. temperature (I_{OUT} = 200 mA) . . . 12
Figure 19. Off-state current vs. temperature . . . 12
Figure 20. Short-circuit current vs. temperature (V_{IN} = 4.3 V) . . . 12
Figure 21. Dropout voltage vs. I_{OUT} . . . 13
Figure 22. Short-cicuit current vs. drop voltage . . . 13
Figure 23. SVR vs. frequency . . . 13
Figure 24. Output noise spectral density . . . 13
Figure 25. Stability plan (V_{OUT} = 3.3 V) . . . 13
Figure 26. Stability plan (V_{OUT} = V_{ADJ}) . . . 13
Figure 27. Startup with enable (V_{OUT} = 3.3 V) . . . 14
Figure 28. Startup with enable (V_{OUT} = V_{ADJ}) . . . 14
Figure 29. Turn-on time (V_{OUT} = 3.3 V) . . . 14
Figure 30. Turn-on time (V_{OUT} = V_{ADJ}) . . . 14
Figure 31. Line transient (V_{OUT} = 3.3 V, rise) . . . 14
Figure 32. Line transient (V_{OUT} = 3.3 V, fall) . . . 14
Figure 33. Load transient (V_{OUT} = 3.3 V, rise) . . . 15
Figure 34. Load transient (V_{OUT} = V_{ADJ}, fall) . . . 15
Figure 35. SOT23-5L package outline . . . 17
Figure 36. SOT23-5L recommended footprint . . . 18
Figure 37. SOT23-5L tape and reel outline . . . 18
Figure 38. SOT-89 package outline . . . 20
Figure 39. SOT-89 recommended footprint . . . 22
Figure 40. SOT-89 carrier tape outline . . . 23

chanhvinh.com

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved