
chanhvinh.com

life.augmented


LDQ40

Datasheet

250 mA low-dropout LDO



DFN6 (2 x 2)
Wettable Flanks



SOT23-5L

Maturity status link
LDQ40

Features

- AEC-Q100 grade 1 qualified
  - Operating temperature range: -40 °C < T_J < 150 °C
- Input voltage from 3.3 V to 40 V
- Dropout voltage (500 mV typ. at 250 mA load)
- Low ground current (2 µA typ. at no load)
- Output voltage: 1.8 V, 2.5 V, 3.3 V, and 5.0 V and ADJ from 1.2 V to 12 V
- Output voltage tolerance: ±1.5% overtemperature, ±0.5% at 25 °C
- 250 mA guaranteed output current
- Power Good for fixed versions
- Logic-controlled electronic shutdown
- Internal current limit
- Short-circuit protection
- Thermal shutdown
- Output active discharge function
- Package options:
  - SOT23-5L, DFN 2x2 6L for industrial applications
  - DFN 2x2 6L WF for automotive grade

Applications

- EV powertrain
- Always-on battery connected application
- Infotainment and instrument clusters
- ADAS

Description

The LDQ40 is a high accuracy voltage regulator, which provides 250 mA of current.

It is available in an SOT23 5L, DFN 2x2 6L package, to maximize space saving.

The device is stabilized with a small ceramic capacitor on the output. The low drop, low quiescent current, and short-circuit protection make the LDQ40 suitable for low-power battery-operated applications.

An enable logic control function puts the LDQ40 in shutdown mode allowing a total current consumption lower than 0.3 µA. Thermal protection is also included.

chanhvinh.com

1 Diagrams

Figure 1. **Block diagram fixed version**


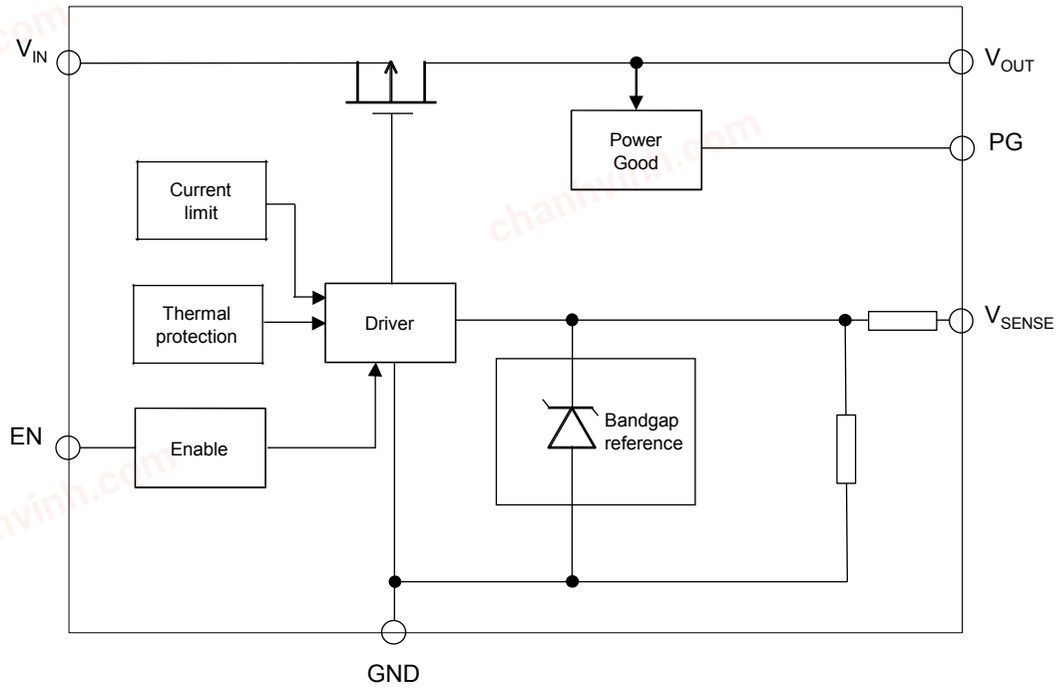



Figure 2. **Block diagram adjustable version**

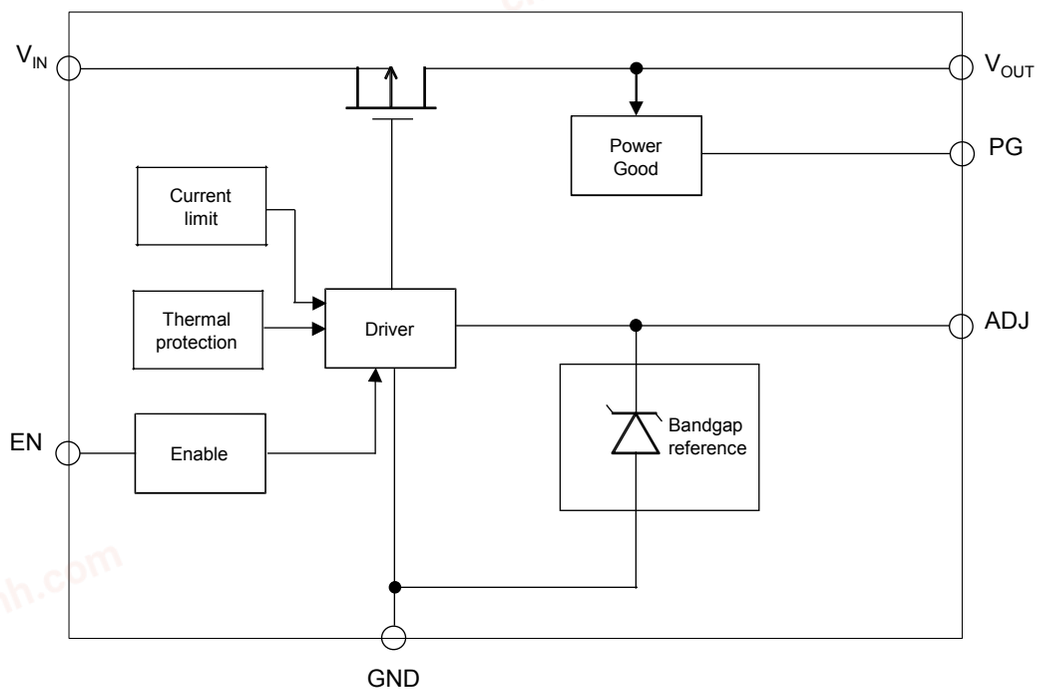

chanhvinh.com

2 Pin configuration

Figure 3. Pin connection (top view)

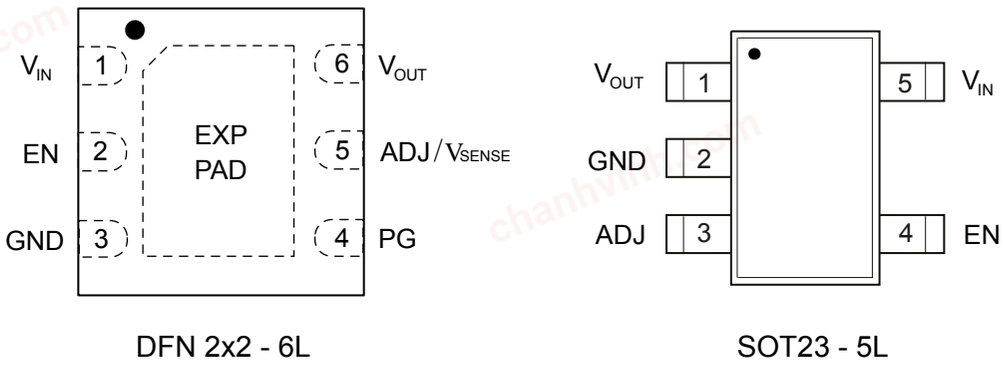

DFN 2x2 - 6L SOT23 - 5L

Table 1. Pin description

DFN6 2 x 2	SOT23-5L	Symbol	Description
1	5	V_{IN}	Input voltage
2	4	EN	Enable pin logic input: set V_{EN} = high to turn on the device V_{EN} = low to turn off the device Do not leave this pin floating
3	2	GND	Ground
4		PG	Power Good
5	3	ADJ/V_{SENSE}	ADJ: adjust pin on the adjustable version Connect to a resistor divider to set the output voltage V_{SENSE}: output voltage sensing pin on fixed versions Connect to V_{OUT} Allows remote sensing
6	1	V_{OUT}	Output voltage
Exp PAD		Exposed pad	Connect to GND

chanhvinh.com

3 Typical application circuit

Figure 4. **Typical application for fixed version**

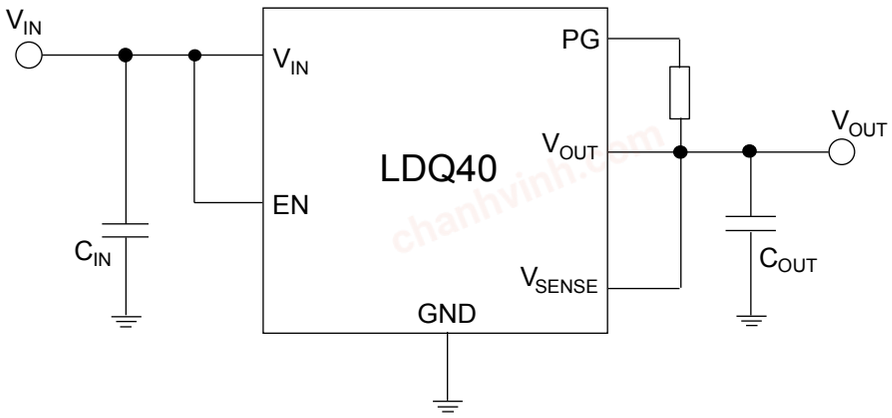


Figure 5. **Typical application for adjustable version**

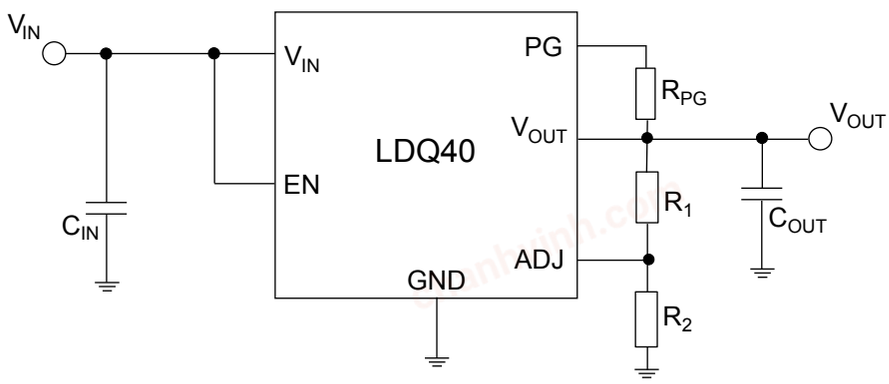


Table 2. **Typical application components**

Symbol	Value	Description	Note
C_{IN}	1 µF	Input capacitor	Ceramic type
C_{OUT}	From 1 to 200 µF	Output capacitor	Ceramic type
ESR	From 5 mΩ to 10 Ω		
R_1		Output voltage side resistor	2 MΩ max.
R_2		Ground side resistor	2 MΩ max.

Note: Including component derating.

chanhvinh.com

4 Maximum ratings

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{IN}	Input voltage	-0.3 to 42	V
V_{OUT}	Output voltage ADJ version	-0.3 to 13	V
V_{OUT}	Fixed version	-0.3 to 6	V
V_{ADJ}	Adjust voltage	-0.3 to 3	V
V_{EN}	Enable input voltage	-0.3 to V_{IN}	V
V_{PG}		13	V
I_{OUT}	Output current (1)	Internally limited (see I_{SC} in Table 6)	A
T_{STG}	Storage temperature range	-40 to 150	°C
T_{JOP}	Operating junction temperature range	-40 to 150	°C

1. *FR4 board with using 1 sq−in pad, 1 oz Cu.*

Note: Stressing the device above the ratings listed in Table 3: absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and operation of the device in these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Table 4. Thermal data

Symbol	Parameter	DFN 2x2 6L	SOT23-5L	Unit
R_{thJA}	Thermal resistance junction-ambient (1)	62	180	°C/W

1. *FR4 board with using 1 sq−in pad, 1 oz Cu.*

Table 5. ESD performance

Symbol	Parameter	Test conditions	Value	Unit
ESD	ESD protection voltage	HBM	2	kV
		CDM on corner pins of DFN WF	750	V
		CDM on inner pins of DFN WF	500	V
		CDM industrial packages	500	V

chanhvinh.com

5 Electrical characteristics

Table 6. Electrical characteristics V_{IN} = $V_{OUT(NOM)}$ + 0.8 V or 2.5 V (whichever is greater); I_{OUT} = 1 mA; C_{IN} = 4.7 µF, C_{OUT} = 10 µF; V_{EN} = V_{IN}; typical values are at T_J = 25 °C; min/max values are at -40 °C ≤ T_J ≤ 150 °C, unless otherwise specified.

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IN}	Operating input voltage		V_{OUT} + V_{DROP}		40	V
$V_{IN(UVLO)}$	Undervoltage lockout	Rising edge		2.55	2.65	V
		Hysteresis		0.2		
V_{REF}	Reference voltage for adjustable devices	T_J = 25 °C		1.2		V
V_{OUT}	Output voltage accuracy	All versions, T_J = 25 °C	-0.5		+0.5	%
		$V_{OUT(NOM)}$ + 1 V ≤ V_{IN} ≤ 18 V; Fixed versions I_{OUT} = 1 mA to 250 mA; -40 °C ≤ T_J ≤ 125 °C	-1.5		+1.5	%
		$V_{OUT(NOM)}$ + 1 V ≤ V_{IN} ≤ 18 V; Adjustable version I_{OUT} = 1 mA to 250 mA; -40 °C ≤ T_J ≤ 125 °C	-2.0		2.0	
ΔV_{OUT-IN}	V_{IN} Static regulation	$V_{OUT\ (NOM)}$ + 1 V ≤ V_{IN}≤ 18 V		0.01	0.05	%/V
$\Delta V_{OUT-LOAD}$	Static load regulation	I_{OUT} = 1 mA to 250 mA		2.0	3.0	mV
V_{DROP}	Dropout voltage	I_{OUT} = 250 mA		500	1000	mV
I_{LIM}	Output current limit	V_{OUT} = 90% $V_{OUT(NOM)}$	350	500	1000	mA
I_{SC}	Short-circuit protection	V_{OUT} = 0.4 V	65	150	250	mA
I_{ADJ}	ADJ pin operating current			0.1	0.5	µA
I_Q	Quiescent current during regulation	V_{IN} from 2.5 V to 40 V no load		2	5	µA
		10 mA		15		
		100 mA		90		
		250 mA		200	500	
I_{Q_OFF}	Standby current	V_{IN} = 14 V		0.3	1	µA
V_{EN}	Enable input logic low	V_{IN} up to 40 V			0.7	V
	Enable input logic high	V_{IN} up to 40 V	2.0			
I_{EN}	Enable pin input current	V_{EN} from 2 V to 40 V		0.01	0.1	µA
V_{PG_OK}	Power Good output threshold, rising (1)		93		98	%V_{OUT}
V_{PG_NOK}	Power Good output threshold, falling (1)		86		95	
V_{pg_hy}	Power Good hysteresis		30	70		mV
V_{PG_L}	Power Good output voltage low	I_{SINK_MAX} = 6 mA, open drain output			0.4	V

chanhvinh.com

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
T_{ON}	Turn on time	From assertion of V_{EN} to V_{OUT} = 98% $V_{OUT(NOM)}$. $V_{OUT(NOM)}$ = 1.0 V		500		µs
SVR_I	V_{IN} supply voltage rejection (adj version)	V_{IN} = $V_{OUT(NOM)}$ + 0.8 V +/- V_{RIPPLE} V_{RIPPLE} = 0.2 V; freq = 1 kHz; I_{OUT} = 10 mA; $V_{OUT(NOM)}$ = 2.5 V		60		dB
SVR_B	V_{BIAS} supply voltage rejection (fixed version)	VBIAS = 3.0 V +/- V_{RIPPLE} V_{RIPPLE} = 0.2 V; freq = 1 kHz; V_{IN} = $V_{OUT(NOM)}$+ 1 V; I_{OUT} = 10 mA; $V_{OUT(NOM)}$ = 2.5 V		55		dB
e_{N-ADJ}	Output noise voltage (adj version)	V_{IN} = $V_{OUT(NOM)}$ + 1 V; $V_{OUT(NOM)}$ = 1.2 V; 10 Hz to 100 kHz, I_{OUT} = 1 mA		50		μV_{RMS}
e_{N-FIX}	Output noise voltage (fixed version)	V_{IN} = $V_{OUT(NOM)}$ + 1 V; $V_{OUT(NOM)}$ = 2.5 V; 10 Hz to 100 kHz, I_{OUT} = 1 mA		90		μV_{RMS}
R_{ON}	Output voltage discharge MOSFET			70		Ω
T_{SHDN}	Thermal shutdown			170		°C
	Hysteresis			20		

1. *The Power Good threshold is calculated as the percentage of the measured V_{OUT}.*

chanhvinh.com

6 Application information

6.1 V_{IN} pin voltage requirements

The LDQ40 is a low-dropout linear voltage regulator equipped with a low-RDS-(on) P-channel MOSFET used as a pass-element. The device's internal circuits are able to start with an input voltage as low as 3.3 V.

6.2 Output voltage

The LDQ40 is available in fixed and adjustable output voltage versions. The latter option is usually chosen when the output voltage has to be set to non-standard values. In the adjustable version, the output voltage can be set from 1.2 V up to 12 V, by connecting a resistor divider between the ADJ pin and the output.

6.3 Output discharge function

The LDQ40 embeds an open drain that allows the output capacitator to discharge, with about 75 Ohm, when the enable pin goes to zero.

6.4 Short-circuit and current limitation

The LDQ40 is protected against short-circuits on the output. The load current is limited to the maximum value of I_{LIM} when V_{OUT} is equal to 90% of its nominal value. When the output voltage drops below 0.4 V, the output current is limited to the short-circuit value.


6.5 Thermal protection

Thermal protection acts when the junction temperature reaches 170 °C typical. At this point, the output of the IC shuts down. As soon as the junction temperature falls below the thermal hysteresis value, the device starts working again.

In order to calculate the maximum power that the device can dissipate, keeping the junction temperature below the maximum operating value, the following formula is used:

$$P_{DMAX} = \left(150 - T_{AMB}\right) / R_{thJA} \quad (1)$$

Figure 6. Derating curve

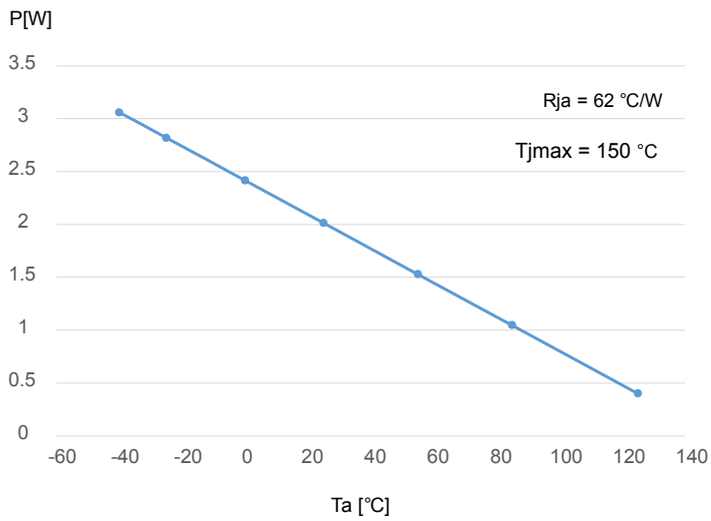

chanhvinh.com

6.6 Input and output capacitors

The LDQ40 requires external capacitors to assure the regulator control loop stability.

Any good quality ceramic capacitor can be used, however, the X5R and the X7R are suggested since they guarantee a very stable combination of capacitance and ESR overtemperature.

It is recommended that the input/output capacitors are located as close as possible to the relative pins. The LDQ40 requires a V_{IN} capacitor with a minimum value of 1 µF minimum.

The control loop is designed to be stable with any good quality output ceramic capacitor (such as X5R/X7R types) with a minimum value of 1.0 µF and equivalent series resistance in the [5 mΩ – 10 Ω] range. It is important to highlight that the output capacitor must maintain its capacitance and ESR in the stable region over the full operating temperature and load and input voltage ranges, to assure stability. Therefore, capacitance and ESR variations must be taken into account in the design phase to ensure the device works in the expected stability region.

6.7 Power Good output

The LDQ40 features a Power Good open drain output. The pin is high-Z when the output voltage is within the valid range or when the device is disabled (EN = LOW). The pin is pulled low when the output voltage is below the minimum PG threshold (see V_{PG_OK} V_{PG_NOK} parameters).

chanhvinh.com

7 Typical performance characteristics

C_{IN} = 4.7 µF; C_{OUT} = 10 µF.

Figure 7. Output voltage vs. temperature

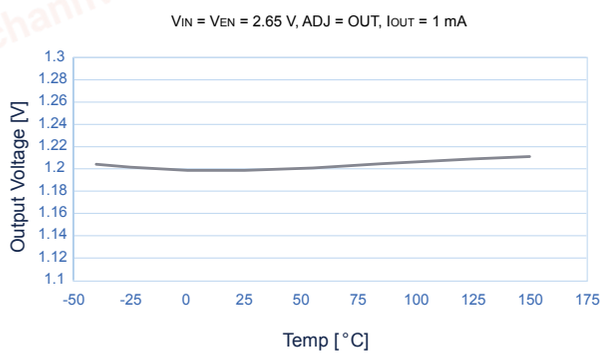


Figure 8. Output voltage vs. temperature

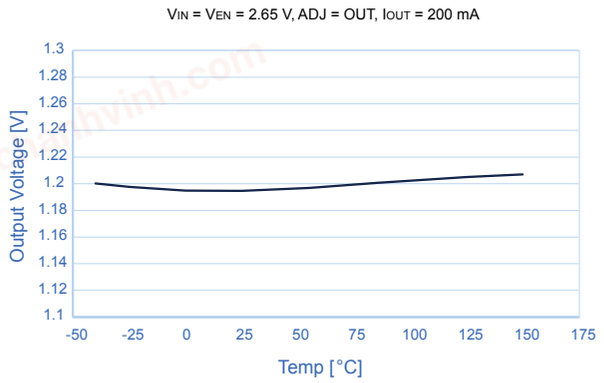


Figure 9. Static load vs. temperature

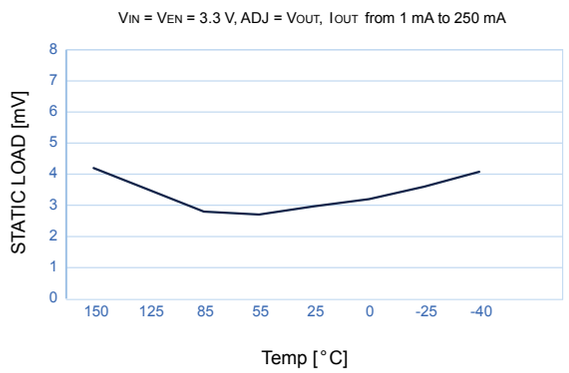


Figure 10. Line regulation

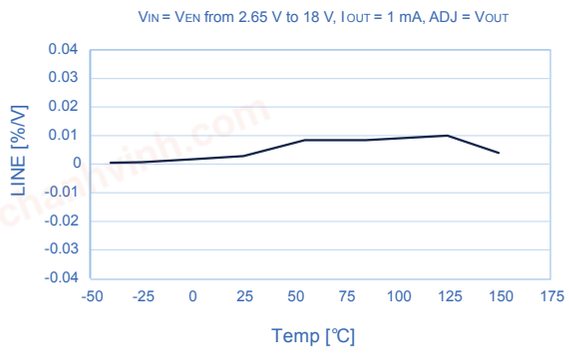


Figure 11. Output current limit vs. temperature


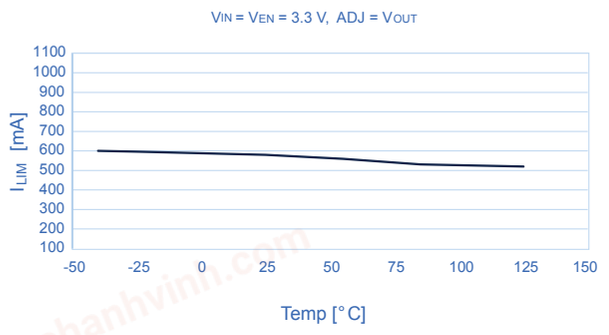


Figure 12. Quiescent current vs. V_{IN}

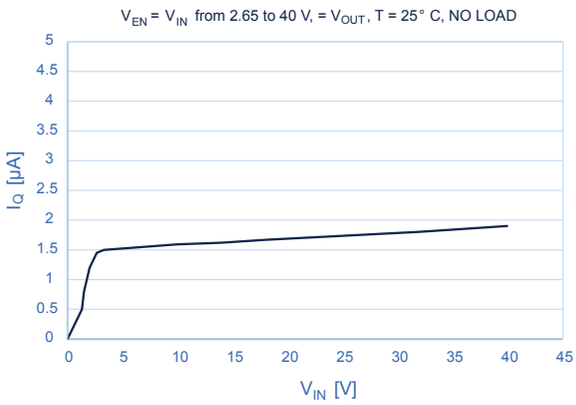

chanhvinh.com

Figure 13. Quiescent current vs. output current

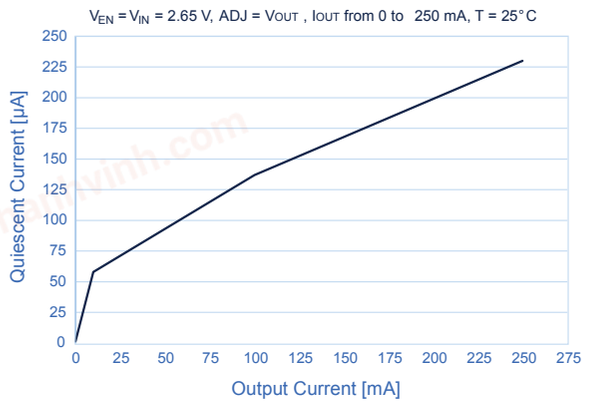


Figure 14. Quiescent current vs. temperature

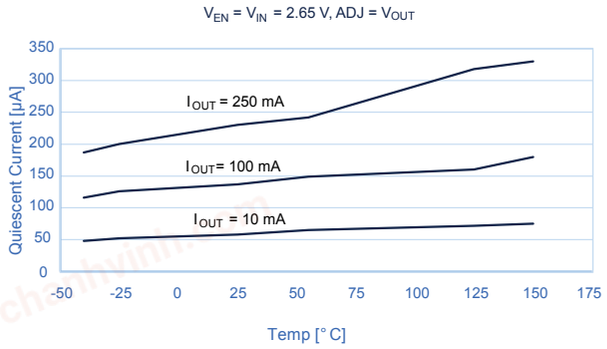


Figure 15. Dropout voltage vs. temperature

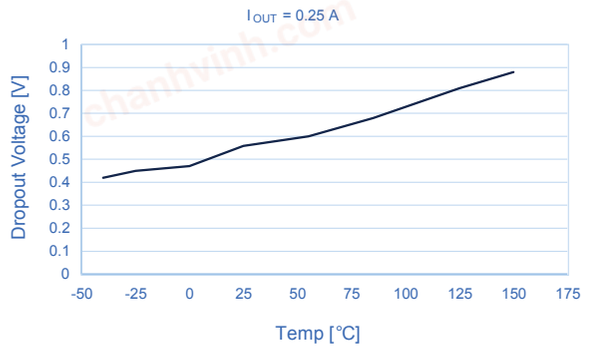


Figure 16. Standby current vs. input voltage

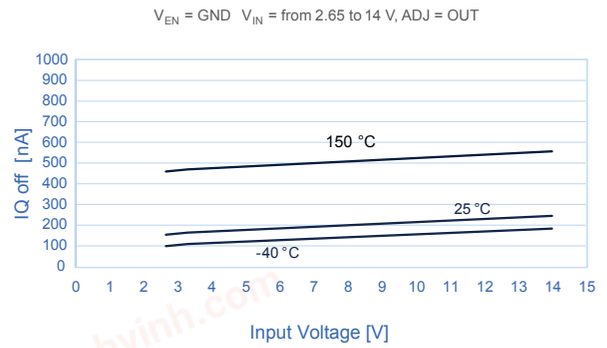


Figure 17. Output noise voltage


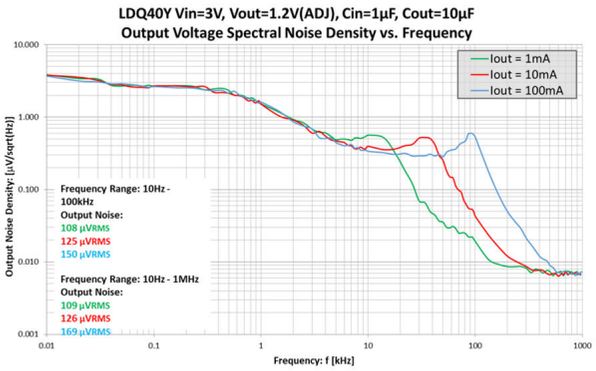


Figure 18. V_{IN} supply voltage rejection vs. frequency

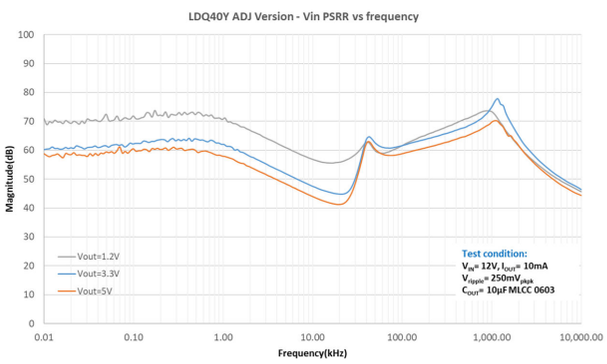

chanhvinh.com

Figure 19. Short-circuit current vs. temperature

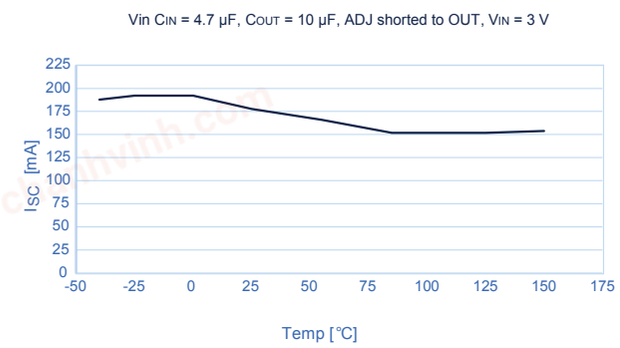


Figure 20. Enable threshold vs. temperature

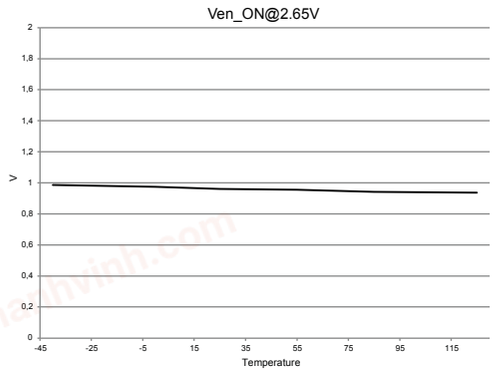


Figure 21. Load transient

VIN = VEN = 2.65 V, ADJ = VOUT, IOUT from 100 µA to 250 mA, tr = tf = 10 µs




Figure 22. Load transient

VIN = VEN = 2.65 V, ADJ = VOUT, IOUT from 10 mA to 250 mA, tr = tf = 5 µs



Figure 23. Line transient

VIN = VEN = 2.65 V to 10 V, tr = tf = 1 µs, ADJ = VOUT, Iout = 1 mA

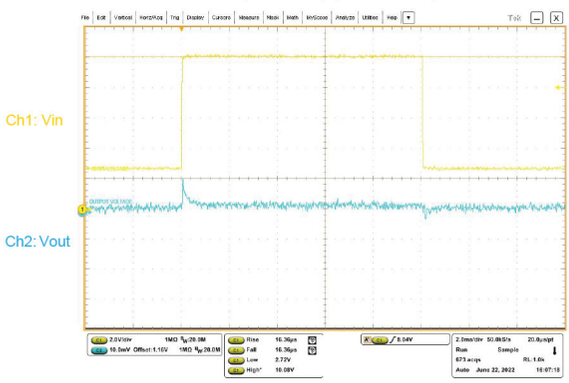


chanhvinh.com

8 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

8.1 DFN6 (2 x 2) package information

Figure 24. DFN6 (2 x 2) package outline

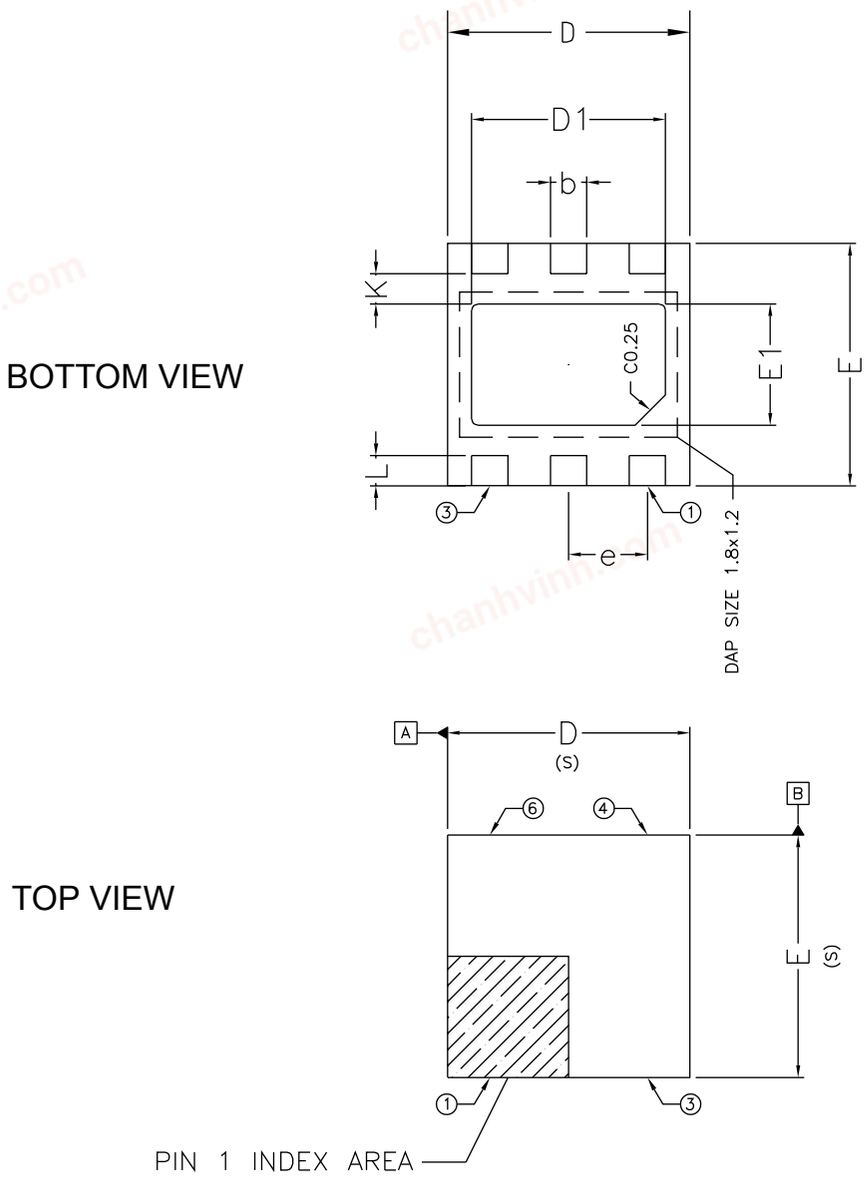


chanhvinh.com

Table 7. **DFN6 (2 x 2) mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	0.70	0.75	0.80
A1	0.00		0.05
A3		0.200 REF	
b	0.25	0.30	0.35
D	1.95	2.00	2.05
D1	1.50	1.60	1.70
e		0.65 BSC	
e2		0.25 REF	
E	1.95	2.00	2.05
E1	0.90	1.00	1.10
K		0.25	
L	0.15	0.25	0.35


Figure 25. **DFN6 (2 x 2) recommended footprint**

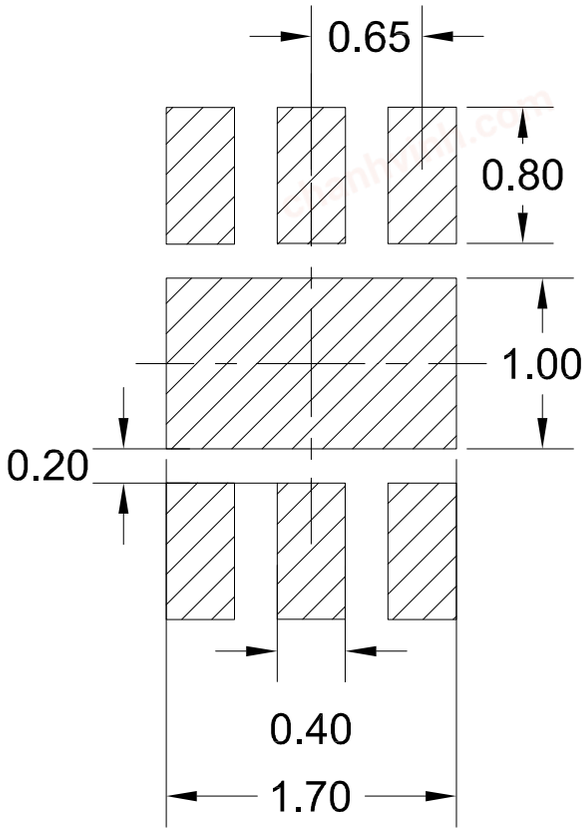

chanhvinh.com

8.2 DFN6 (2 x 2) wettable flanks package information

Figure 26. **DFN6 (2 x 2) wettable flanks package outline**

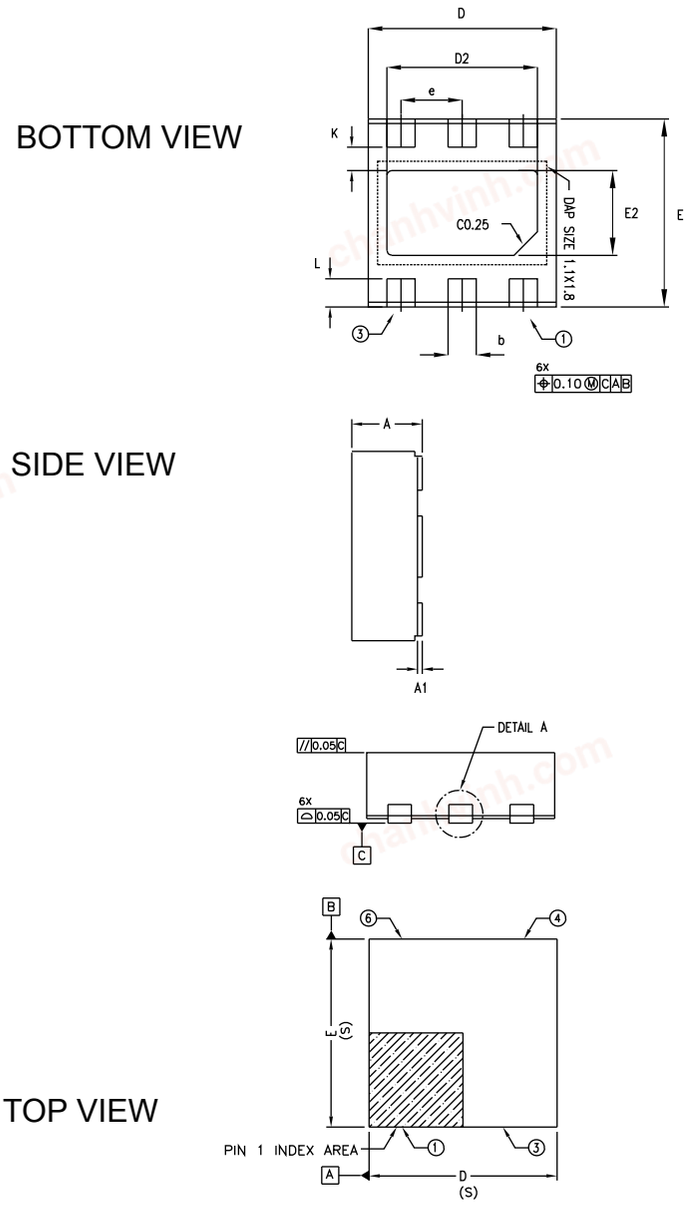


chanhvinh.com

Table 8. **DFN6 (2 x 2) wettable flanks mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	0.70	0.75	0.80
A1	0.00		0.05
b	0.25	0.30	0.35
D	1.95	2.00	2.05
D2	1.50	1.60	1.70
e		0.65 BSC	
E	1.95	2.00	2.05
E2	0.80	0.90	1.00
L	0.20	0.30	0.40
K		0.25 BSC	
aaa		0.10	
bbb		0.10	
ccc		0.10	
ddd		0.10	

chanhvinh.com


Figure 27. **DFN6 (2 x 2) wettable flanks recommended footprint**

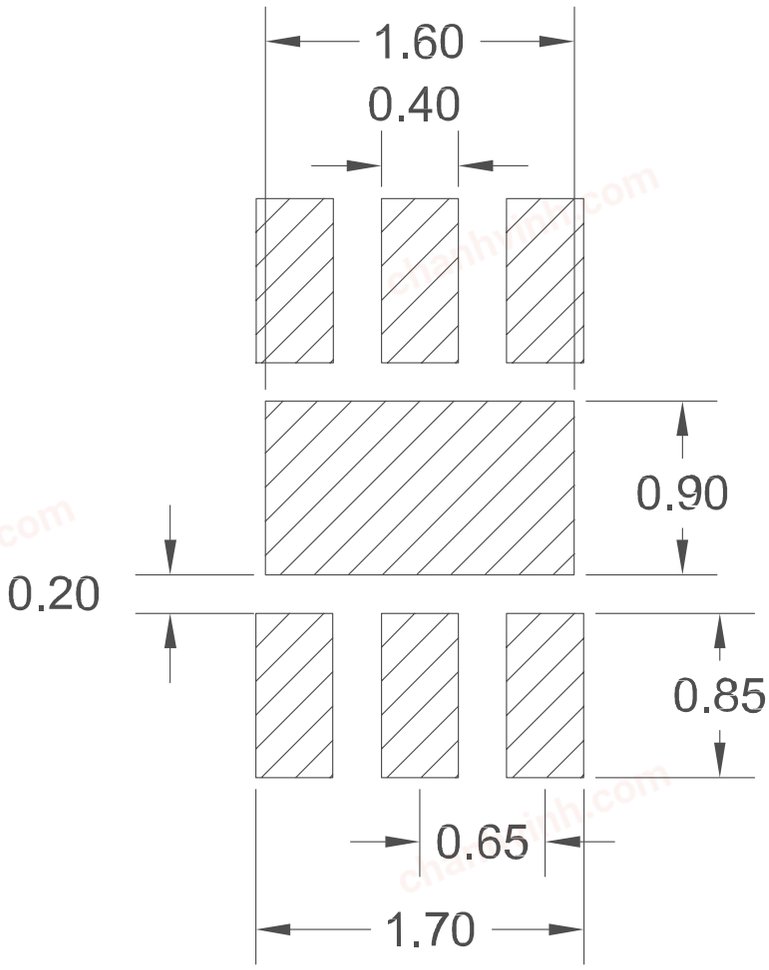

chanhvinh.com

8.3 DFN6 WF 2D marking information

Figure 28. **DFN6 WF 2D marking**

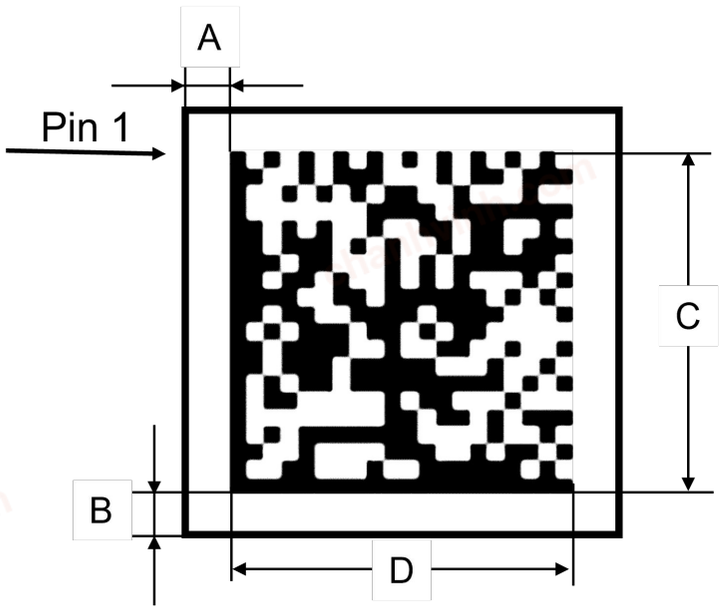


Spec	UTL
A	0.2 mm
B	0.2 mm
C	1.6x1.6 (+/-0.125) mm.
D	1.6x1.6 (+/-0.125) mm.

chanhvinh.com

8.4 SOT23-5L package information

Figure 29. **SOT23-5L package outline**

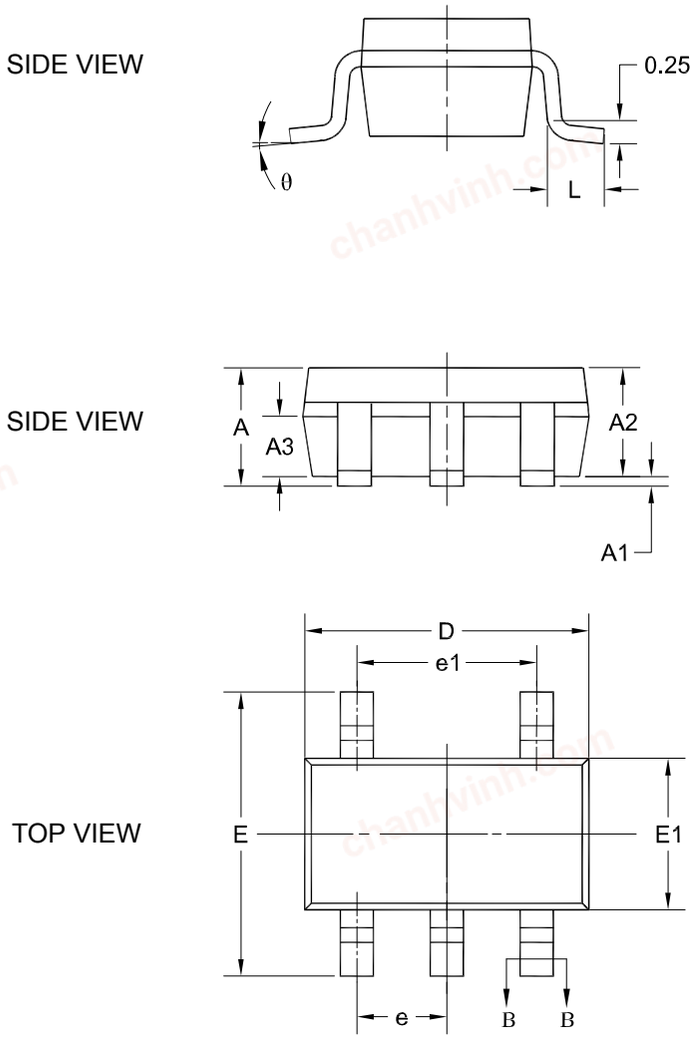


chanhvinh.com

Table 9. **SOT23-5L mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A			1.25
A1	0.04		0.10
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.33		0.41
b1	0.32	0.35	0.38
c	0.15		0.19
c1	0.14	0.15	0.16
D	2.82	2.92	3.02
E	2.60	2.80	3.00
E1	1.50	1.60	1.70
e	0.95 CS		
e1	1.90 BSC		
L	0.30		0.60
Θ	0		8°


Figure 30. **SOT23-5L recommended footprint**

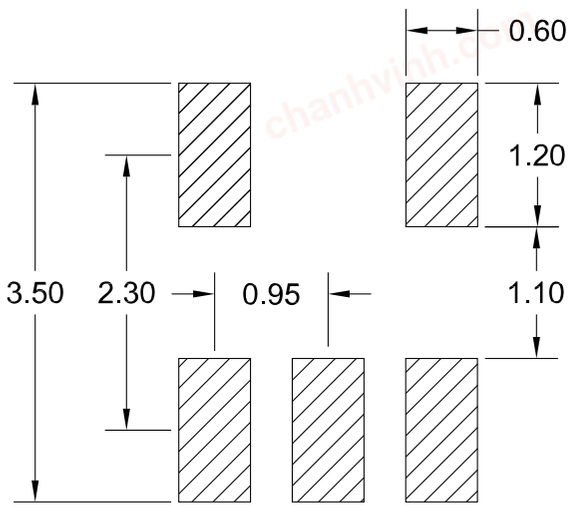

chanhvinh.com

9 DFN6 (2x2 mm) packing information

Figure 31. **DFN6 (2x2 mm) tape outline**

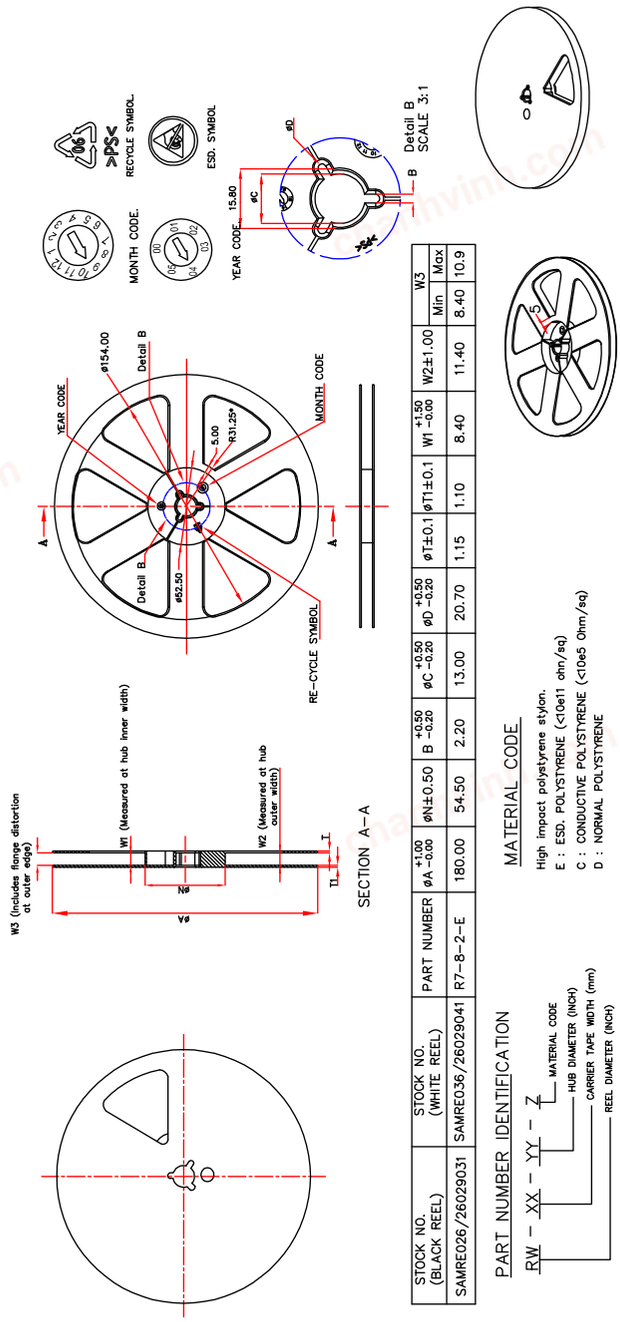

STOCK NO. (BLACK REEL)	STOCK NO. (WHITE REEL)	PART NUMBER	øA +1.00 -0.00	øN±0.50	B +0.50 -0.20	øC +0.50 -0.20	øD +0.50 -0.20	øT±0.1	øT1±0.1	W1 +1.50 -0.00	W2±1.00	W3 Min	W3 Max
SAMRE026/26029031	SAMRE036/26029041	R7-8-2-E	180.00	54.50	2.20	13.00	20.70	1.15	1.10	8.40	11.40	8.40	10.9

PART NUMBER IDENTIFICATION

RW - XX - YY - Z

- MATERIAL CODE
- HUB DIAMETER (INCH)
- CARRIER TAPE WIDTH (mm)
- REEL DIAMETER (INCH)


MATERIAL CODE

High impact polystyrene stylon.
E : ESD. POLYSTYRENE (<10e11 ohn/sq)
C : CONDUCTIVE POLYSTYRENE (<10e5 Ohm/sq)
D : NORMAL POLYSTYRENE

NOTES :
1.Date code on flang should be same manufactory month.
2.width code on flang should be same hub width.
3.All dimensions in millimeters unless unless otherwise stated.
4.Unspecified dimension tolerance should be ± 0.10 mm.
5.Must conform to E.I.A. standard

chanhvinh.com

Figure 32. **DFN6 (2x2 mm) reel outline**

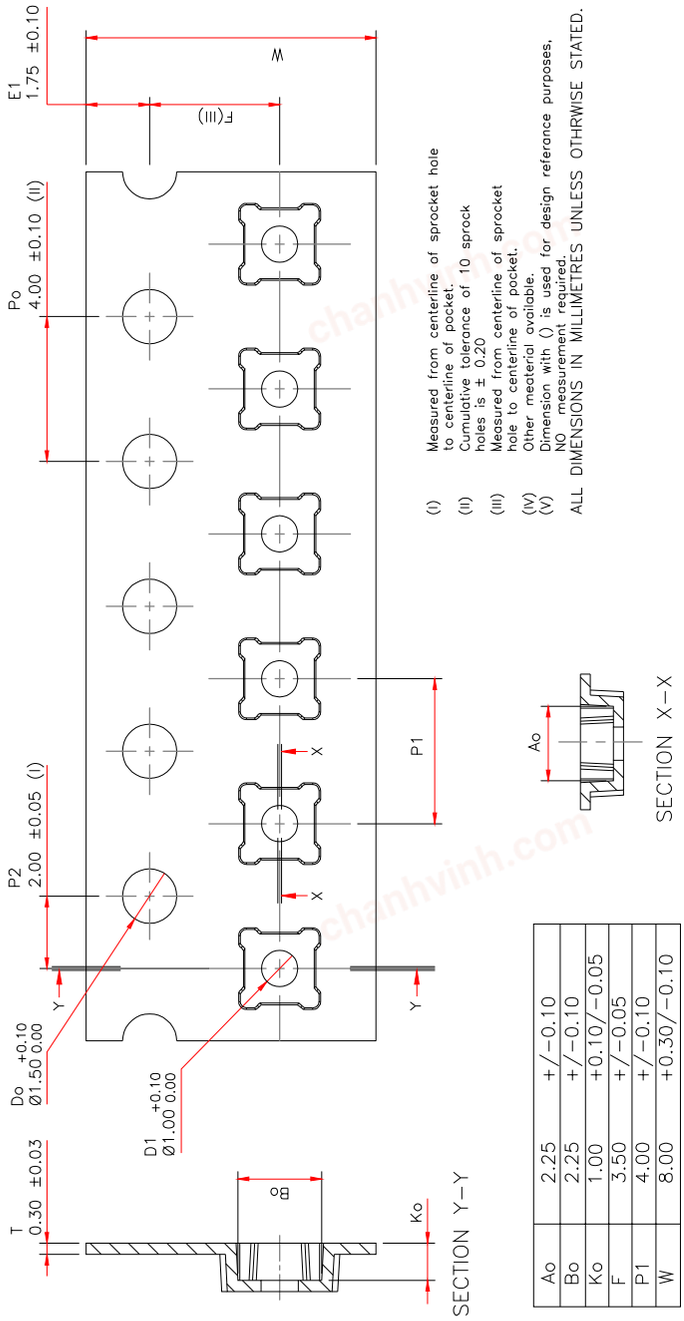

Ao	2.25	+/–0.10
Bo	2.25	+/–0.10
Ko	1.00	+0.10/–0.05
F	3.50	+/–0.05
P1	4.00	+/–0.10
W	8.00	+0.30/–0.10

chanhvinh.com

Figure 33. **Pin 1 orientation**


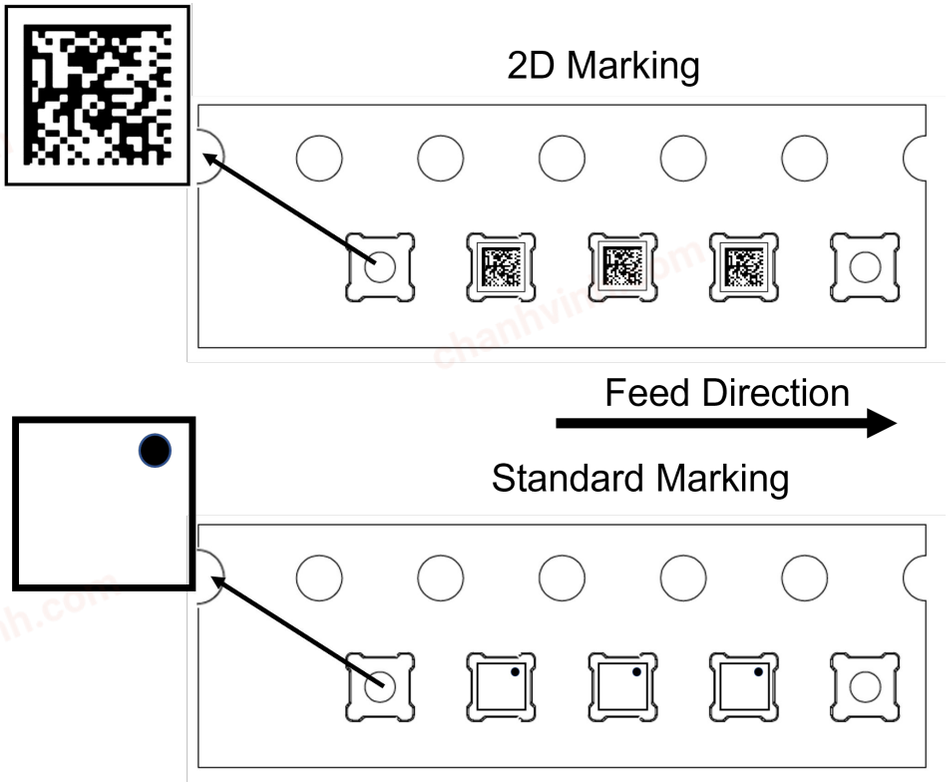


Figure 34. **DFN6 (2x2 mm) cover tape outline**

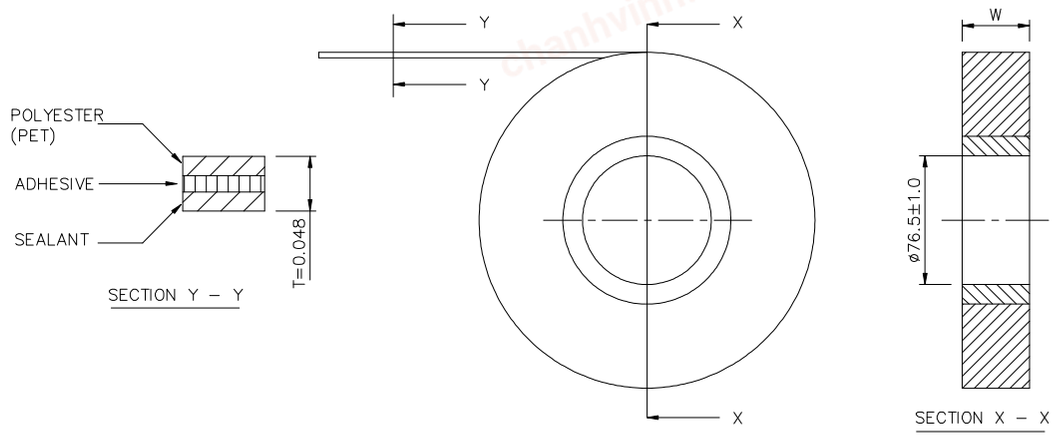

COVER TAPE WIDTH* (W ±0.1)	CARRIER TAPE WIDTH
5.3, 5.4, 5.5	8
9.2, 9.3, 9.5	12
13.3, 13.5	16
21.0, 21.3	24
25.5	32
37.5	44
49.5	56
81.5	88

NOTES

1 THICKNESS : 0.041 – 0.055
2 STANDARD LENGTH : 300m or 500m
3 TENSILE STRENGTH : >5.0kg/mm sq.
4 ELONGATION : >75%
5 SURFACE RESISTANCE: 1E+4 TO 9.9E+10 ohms.
SURFACE RESISTIVITY: 1E+5 TO 9.9E+11 ohms/sq.
6 PEEL STRENGTH CONFORMS TO EIA SPEC: 20 TO 80g
7 RECOMMENDED SHELF LIFE : 2 YEARS
FROM MANUFACTURING DATE
8 LUMINOUS TRANSMITTANCE : 87.8%
9 HAZE : 28%
*10 OTHER COVER TAPE WIDTH REFER TO WI4.08–04.

chanhvinh.com

10 Ordering information

Table 10. **Order codes**

Order code	Package	V_{OUT}	Marking
LDQ40PURY	DFN6 2x2 wettable flanks	ADJ	see 2D code
LDQ40PU18RY		1.8	
LDQ40PU25RY		2.5	
LDQ40PU33RY		3.3	
LDQ40PU50RY		5.0	
LDQ40PUR	DFN6 2x2	ADJ	AD
LDQ40PU33R		3.3	TBD
LDQ40M33R	SOT23 5L	3.3	TBD

chanhvinh.com

chanhvinh.com

Revision history

Table 11. **Document revision history**

Date	Revision	Changes
24-Oct-2023	1	Initial release.
13-Dec-2023	2	Minor text changes.

chanhvinh.com

chanhvinh.com

Contents

1 Diagrams . . . 2
2 Pin configuration . . . 3
3 Typical application circuit . . . 4
4 Maximum ratings . . . 5
5 Electrical characteristics . . . 6
6 Application information . . . 8
6.1 V_{IN} pin voltage requirements . . . 8
6.2 Output voltage . . . 8
6.3 Output discharge function . . . 8
6.4 Short-circuit and current limitation . . . 8
6.5 Thermal protection . . . 8
6.6 Input and output capacitors . . . 9
6.7 Power Good output . . . 9
7 Typical performance characteristics . . . 10
8 Package information . . . 13
8.1 DFN6 (2 x 2) package information . . . 13
8.2 DFN6 (2 x 2) wettable flanks package information . . . 15
8.3 DFN6 WF 2D marking information . . . 18
8.4 SOT23-5L package information . . . 19
9 DFN6 (2x2 mm) packing information . . . 21
10 Ordering information . . . 24
Revision history . . . 25

chanhvinh.com

List of tables

Table 1. Pin description . . . 3
Table 2. Typical application components . . . 4
Table 3. Absolute maximum ratings . . . 5
Table 4. Thermal data . . . 5
Table 5. ESD performance . . . 5
Table 6. Electrical characteristics V_{IN} = $V_{OUT(NOM)}$ + 0.8 V or 2.5 V (whichever is greater); I_{OUT} = 1 mA; C_{IN} = 4.7 µF, C_{OUT} = 10 µF; V_{EN} = V_{IN}; typical values are at T_J = 25 °C; min/max values are at -40 °C ≤ T_J ≤ 150 °C, unless otherwise specified. . . . 6
Table 7. DFN6 (2 x 2) mechanical data . . . 14
Table 8. DFN6 (2 x 2) wettable flanks mechanical data . . . 16
Table 9. SOT23-5L mechanical data . . . 20
Table 10. Order codes . . . 24
Table 11. Document revision history . . . 25

chanhvinh.com

List of figures

Figure 1. Block diagram fixed version . . . 2
Figure 2. Block diagram adjustable version . . . 2
Figure 3. Pin connection (top view) . . . 3
Figure 4. Typical application for fixed version . . . 4
Figure 5. Typical application for adjustable version . . . 4
Figure 6. Derating curve . . . 8
Figure 7. Output voltage vs. temperature . . . 10
Figure 8. Output voltage vs. temperature . . . 10
Figure 9. Static load vs. temperature . . . 10
Figure 10. Line regulation . . . 10
Figure 11. Output current limit vs. temperature . . . 10
Figure 12. Quiescent current vs. V_{IN} . . . 10
Figure 13. Quiescent current vs. output current . . . 11
Figure 14. Quiescent current vs. temperature . . . 11
Figure 15. Dropout voltage vs. temperature . . . 11
Figure 16. Standby current vs. input voltage . . . 11
Figure 17. Output noise voltage . . . 11
Figure 18. V_{IN} supply voltage rejection vs. frequency . . . 11
Figure 19. Short-circuit current vs. temperature . . . 12
Figure 20. Enable threshold vs. temperature . . . 12
Figure 21. Load transient . . . 12
Figure 22. Load transient . . . 12
Figure 23. Line transient . . . 12
Figure 24. DFN6 (2 x 2) package outline . . . 13
Figure 25. DFN6 (2 x 2) recommended footprint . . . 14
Figure 26. DFN6 (2 x 2) wettable flanks package outline . . . 15
Figure 27. DFN6 (2 x 2) wettable flanks recommended footprint . . . 17
Figure 28. DFN6 WF 2D marking . . . 18
Figure 29. SOT23-5L package outline . . . 19
Figure 30. SOT23-5L recommended footprint . . . 20
Figure 31. DFN6 (2x2 mm) tape outline . . . 21
Figure 32. DFN6 (2x2 mm) reel outline . . . 22
Figure 33. Pin 1 orientation . . . 23
Figure 34. DFN6 (2x2 mm) cover tape outline . . . 23

chanhvinh.com

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved

chanhvinh.com