
chanhvinh.com

life.augmented


SCTWA40N12G24AG

Datasheet

Automotive-grade silicon carbide Power MOSFET 1200 V, 75 mΩ typ., 33 A in an HiP247-4 package



HiP247-4

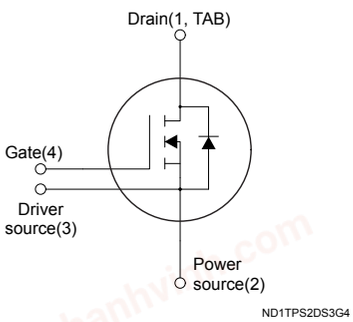

Features

Order code	V_{DS}	$R_{DS(on)}$ max.	I_D
SCTWA40N12G24AG	1200 V	105 mΩ	33 A

- AEC-Q101 qualified
- Very fast and robust intrinsic body diode
- Extremely low gate charge and input capacitance
- Very high operating junction temperature capability (T_J = 200 °C)
- Source sensing pin for increased efficiency

Applications

- Main inverter (electric traction)
- DC/DC converter for EV/HEV
- On board charger (OBC)

Description

This silicon carbide Power MOSFET device has been developed using ST's advanced and innovative 2nd generation SiC MOSFET technology. The device features remarkably low on-resistance per unit area and very good switching performance. The variation of switching loss is almost independent of junction temperature.

STPOWER

Product status link
SCTWA40N12G24AG

Product summary	
Order code	SCTWA40N12G24AG
Marking	SCT40N12G24AG
Package	HiP247-4
Packing	Tube

chanhvinh.com

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-source voltage	1200	V
V_{GS}	Gate-source voltage	-10 to 22	V
	Gate-source voltage (recommended operating values)	-5 to 18	
	Gate-source voltage (pulsed, t_p = 25 ns repetitive overshoot during switching for an accumulated time of 10 h)	-11 to 25	
I_D	Drain current (continuous) at T_C = 25 °C	33	A
	Drain current (continuous) at T_C = 100 °C	25	
I_{DM}(1)	Drain current (pulsed)	100	A
P_{TOT}	Total power dissipation at T_C = 25 °C	290	W
T_{stg}	Storage temperature range	-55 to 200	°C
T_J	Operating junction temperature range		°C

1. *Pulse width limited by safe operating area.*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance, junction-to-case	0.6	°C/W
R_{thJA}	Thermal resistance, junction-to-ambient	40	°C/W

chanhvinh.com

2 Electrical characteristics

T_C = 25 °C unless otherwise specified.

Table 3. On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS} = 0 V, I_D = 1 mA	1200			V
I_{DSS}	Zero gate voltage drain current	V_{DS} = 1200 V, V_{GS} = 0 V			10	µA
I_{GSS}	Gate-body leakage current	V_{DS} = 0 V, V_{GS} = -10 to 22 V			±100	nA
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 1 mA	1.9	3.2	5.0	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS} = 18 V, I_D = 20 A		75	105	mΩ
		V_{GS} = 18 V, I_D = 20 A, T_J = 200 °C		195		

Table 4. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS} = 800 V, f = 1 MHz, V_{GS} = 0 V	-	1230	-	pF
C_{oss}	Output capacitance		-	56	-	pF
C_{rss}	Reverse transfer capacitance		-	15	-	pF
Q_g	Total gate charge	V_{DS} = 800 V, V_{GS} = -5 to 18 V, I_D = 20 A	-	63	-	nC
Q_{gs}	Gate-source charge		-	15	-	nC
Q_{gd}	Gate-drain charge		-	20	-	nC
R_G	Gate input resistance	f = 1 MHz, I_D = 0 A	-	1	-	Ω

Table 5. Switching energy

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
E_{on}	Turn-on switching energy	V_{DD} = 800 V, I_D = 20 A, R_G = 4.7 Ω, V_{GS} = -5 to 18 V	-	235	-	µJ
E_{off}	Turn-off switching energy		-	77	-	µJ

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 800 V, I_D = 20 A, R_G = 4.7 Ω, V_{GS} = -5 to 18 V	-	11	-	ns
t_r	Rise time		-	5	-	ns
$t_{d(off)}$	Turn-off-delay time		-	18	-	ns
t_f	Fall time		-	13	-	ns

chanhvinh.com

Table 7. **Reverse SiC diode characteristics**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{SD}	Diode forward voltage	I_{SD} = 20 A, V_{GS} = 0 V	-	3.4	-	V
t_{rr}	Reverse recovery time	I_{SD} = 20 A, di/dt = 2000 A/µs, V_{DD} = 800 V, V_{GS} = -5 to 18 V	-	10	-	ns
Q_{rr}	Reverse recovery charge		-	132	-	nC
I_{RRM}	Reverse recovery current		-	20	-	A

chanhvinh.com

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

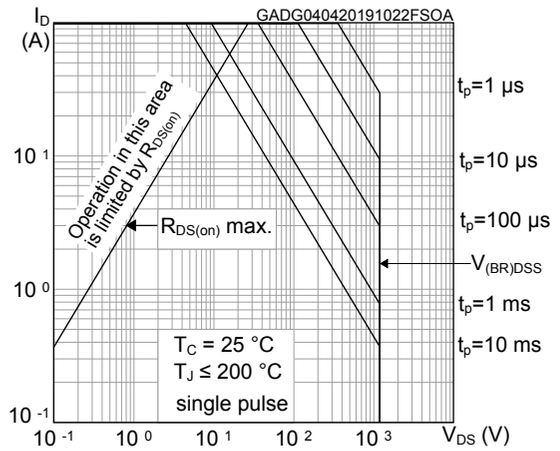


Figure 2. Maximum transient thermal impedance

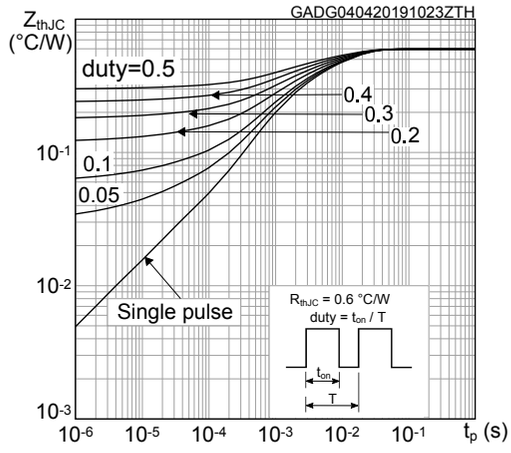


Figure 3. Output characteristics (T_J = -50 °C)

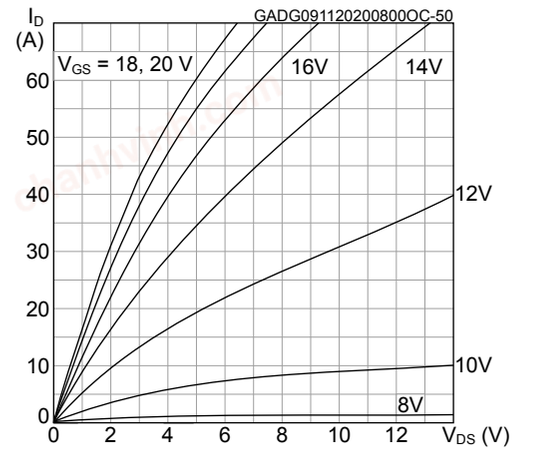


Figure 4. Output characteristics (T_J = 25 °C)

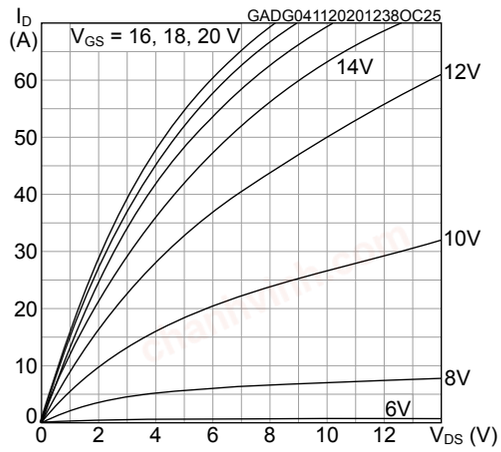


Figure 5. Output characteristics (T_J = 200 °C)


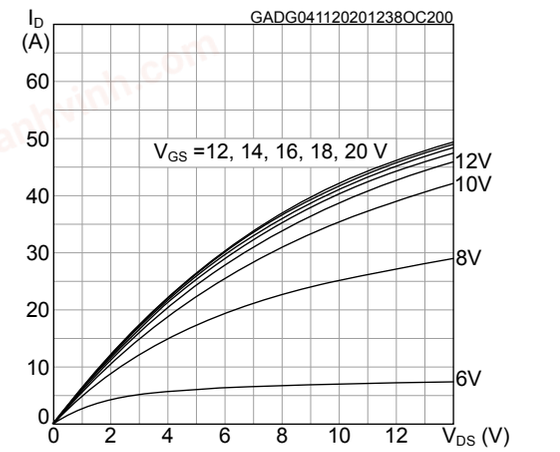


Figure 6. Transfer characteristics

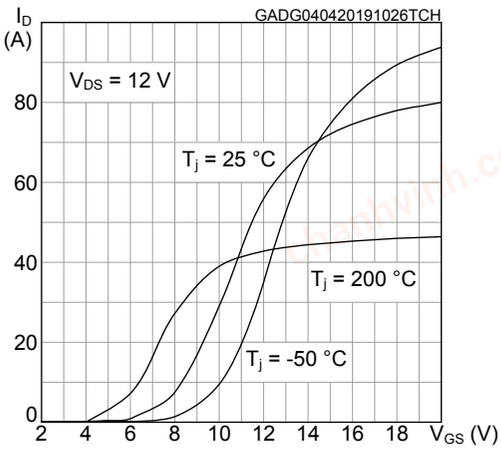

chanhvinh.com

Figure 7. Total power dissipation

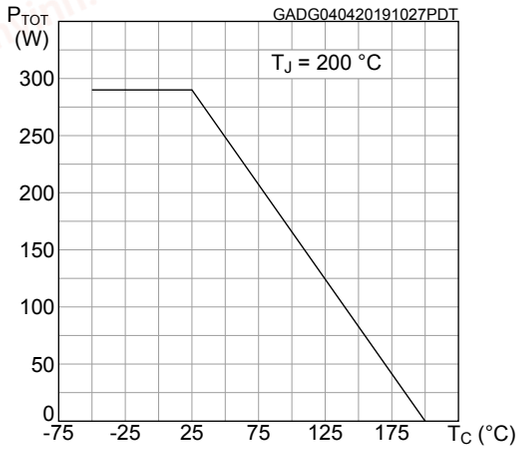


Figure 8. Gate charge vs gate-source voltage

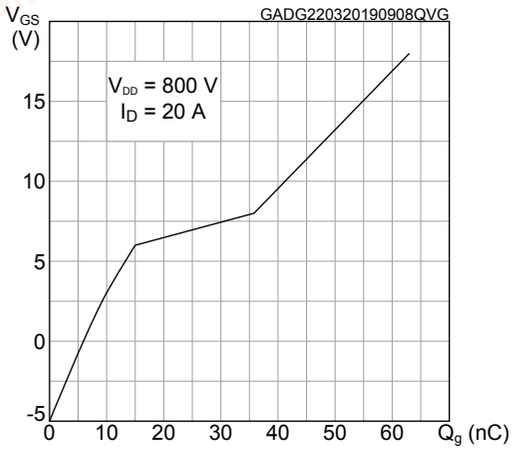


Figure 9. Capacitance variations

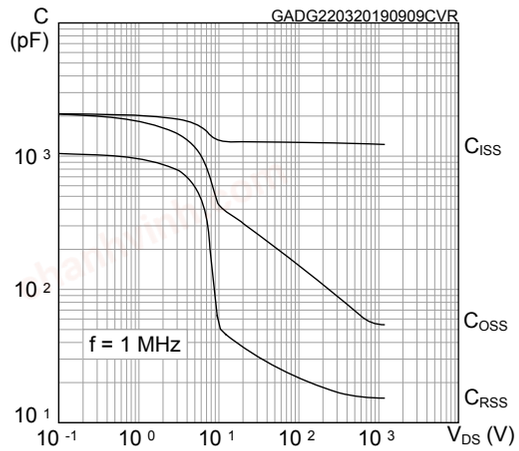


Figure 10. Switching energy vs drain current

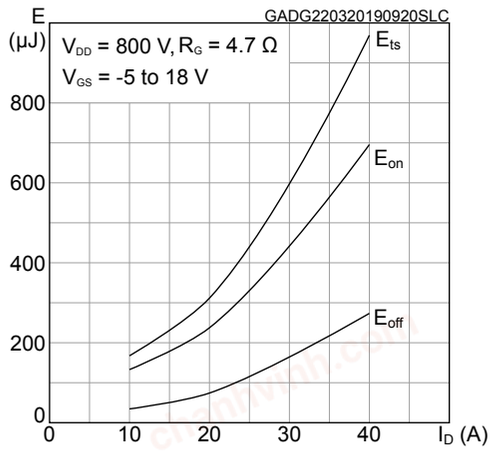


Figure 11. Switching energy vs junction temperature


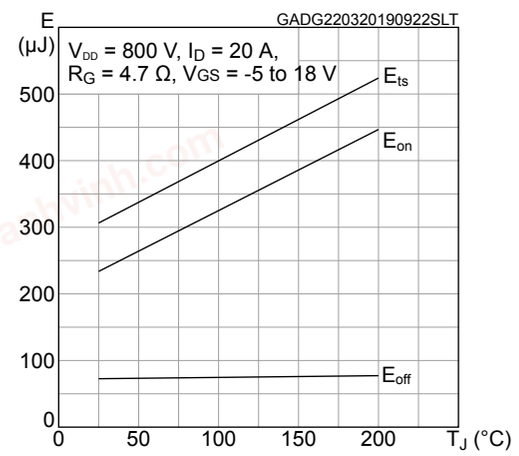


Figure 12. Normalized $V_{(BR)DSS}$ vs temperature

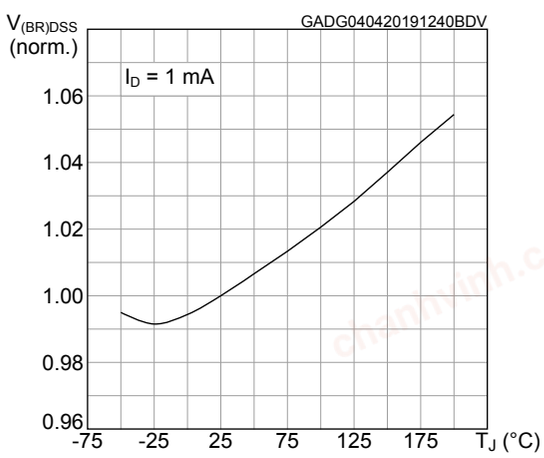

chanhvinh.com

Figure 13. Normalized on-resistance vs temperature

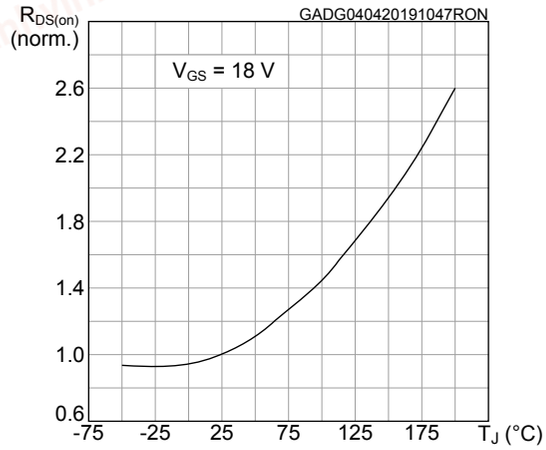


Figure 14. Normalized gate threshold voltage vs temperature

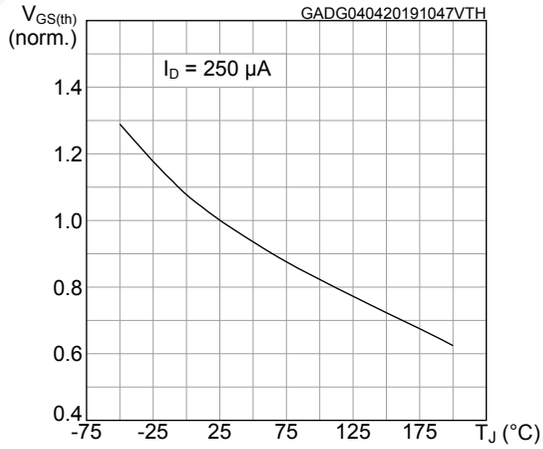


Figure 15. Reverse conduction characteristics (T_J = -50 °C)

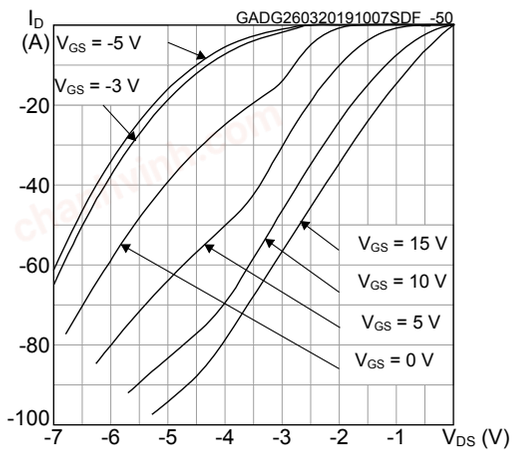


Figure 16. Reverse conduction characteristics (T_J = 25 °C)


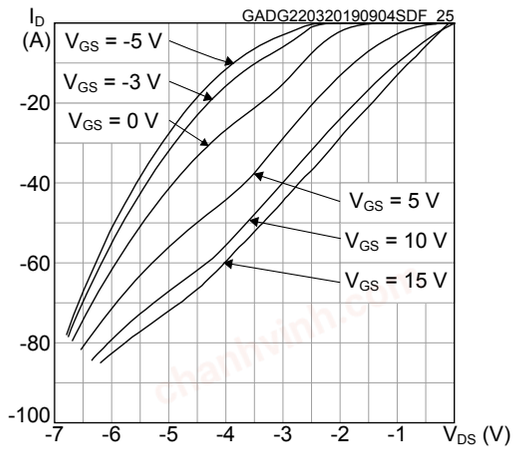


Figure 17. Reverse conduction characteristics (T_J = 200 °C)

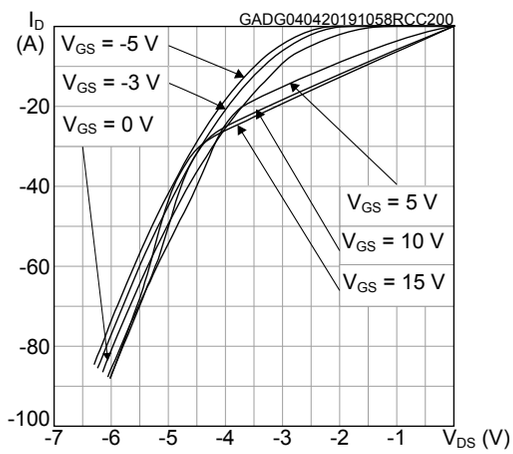


chanhvinh.com

3 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

3.1 HiP247-4 package information

Figure 18. HiP247-4 package outline

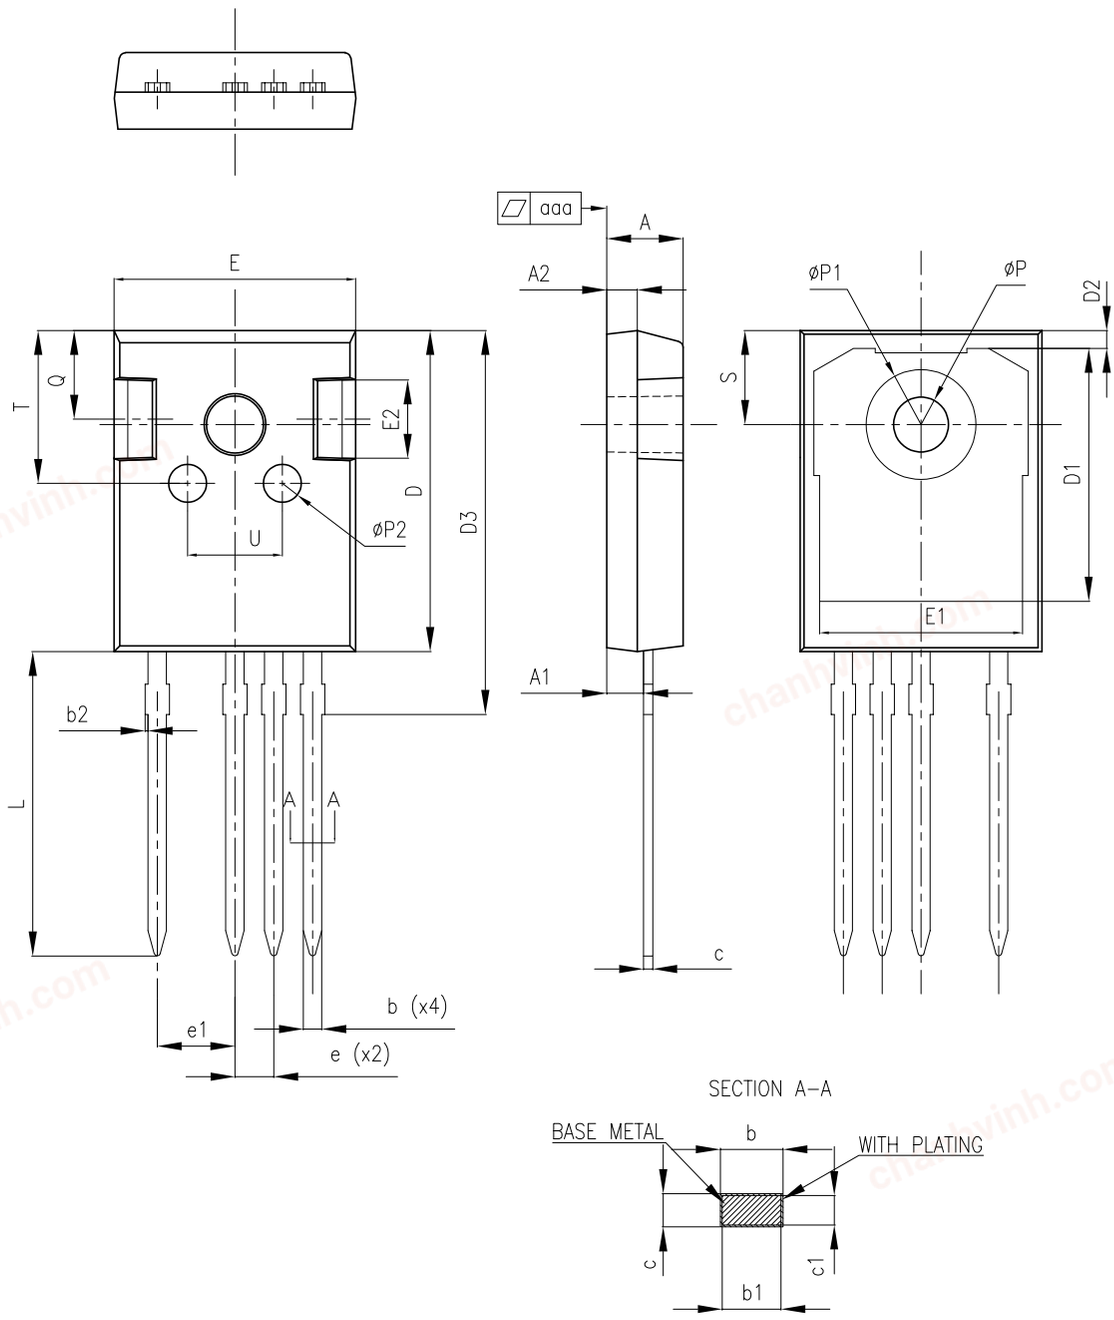

8405626_Rev_3

chanhvinh.com

Table 8. **HiP247-4 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.90	5.00	5.10
A1	2.31	2.41	2.51
A2	1.90	2.00	2.10
b	1.16		1.29
b1	1.15	1.20	1.25
b2	0		0.20
c	0.59		0.66
c1	0.58	0.60	0.62
D	20.90	21.00	21.10
D1	16.25	16.55	16.85
D2	1.05	1.20	1.35
D3	24.97	25.12	25.27
E	15.70	15.80	15.90
E1	13.10	13.30	13.50
E2	4.90	5.00	5.10
E3	2.40	2.50	2.60
e	2.44	2.54	2.64
e1	4.98	5.08	5.18
L	19.80	19.92	20.10
P	3.50	3.60	3.70
P1			7.40
P2	2.40	2.50	2.60
Q	5.60		6.00
S		6.15	
T	9.80		10.20
U	6.00		6.40
aaa		0.04	0.10

chanhvinh.com

Revision history

Table 9. **Document revision history**

Date	Revision	Changes
24-Nov-2020	1	First release.
24-Jun-2021	2	Updated *Table 6. Switching times.*
27-Sep-2021	3	Modified *Table 1. Absolute maximum ratings.*
22-Nov-2021	4	Modified *Figure 1. Safe operating area and Figure 2. Maximum transient thermal impedance.*
20-Oct-2023	5	Updated Table 7. Reverse SiC diode characteristics.

chanhvinh.com

Contents

1 **Electrical ratings** 2
2 **Electrical characteristics** 3
2.1 Electrical characteristics (curves) 5
3 **Package information** 8
3.1 HiP247-4 package information 8
Revision history 10

chanhvinh.com

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved