
chanhvinh.com

life.augmented


STB45N60DM6

Datasheet

N-channel 600 V, 85 mΩ typ., 30 A MDmesh DM6 Power MOSFET in a D²PAK package



D²PAK



Features

Order code	V_{DS}	$R_{DS(on)}$ max.	I_D
STB45N60DM6	600 V	99 mΩ	30 A

- Fast-recovery body diode
- Lower $R_{DS(on)}$ per area vs previous generation
- Low gate charge, input capacitance and resistance
- 100% avalanche tested
- Extremely high dv/dt ruggedness
- Zener-protected

Applications

- Switching applications

Description

This high-voltage N-channel Power MOSFET is part of the MDmesh DM6 fast-recovery diode series. Compared with the previous MDmesh fast generation, DM6 combines very low recovery charge (Q_{rr}), recovery time (t_{rr}) and excellent improvement in $R_{DS(on)}$ per area with one of the most effective switching behaviors available in the market for the most demanding high-efficiency bridge topologies and ZVS phase-shift converters.

STPOWER

Product status link
STB45N60DM6

Product summary	
Order code	STB45N60DM6
Marking	45N60DM6
Package	D²PAK
Packing	Tape and reel

chanhvinh.com

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{GS}	Gate-source voltage	±25	V
I_D	Drain current (continuous) at T_C = 25 °C	30	A
	Drain current (continuous) at T_C = 100 °C	19	
I_{DM} (1)	Drain current (pulsed)	95	A
P_{TOT}	Total power dissipation at T_C = 25 °C	210	W
dv/dt (2)	Peak diode recovery voltage slope	100	V/ns
di/dt (2)	Peak diode recovery current slope	1000	A/µs
dv/dt (3)	MOSFET dv/dt ruggedness	100	V/ns
T_{stg}	Storage temperature range	-55 to 150	°C
T_J	Operating junction temperature range		°C

1. *Pulse width limited by safe operating area*
2. *I_{SD} ≤ 30 A, V_{DS} (peak) < $V_{(BR)DSS}$, V_{DD}= 400 V*
3. *V_{DS} ≤ 480 V*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance, junction-to-case	0.6	°C/W
R_{thJA} (1)	Thermal resistance, junction-to-ambient	30	°C/W

1. *When mounted on FR-4 board of 1 inch², 2oz Cu.*

Table 3. Avalanche characteristics

Symbol	Parameter	Value	Unit
I_{AR}	Avalanche current, repetitive or not repetitive (pulse width limited by T_J max.)	6	A
E_{AS}	Single pulse avalanche energy (starting T_J = 25 °C, I_D = I_{AR}, V_{DD} = 50 V)	630	mJ

chanhvinh.com

2 Electrical characteristics

T_C = 25 °C unless otherwise specified.

Table 4. On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS} = 0 V, I_D = 1 mA	600			V
I_{DSS}	Zero gate voltage drain current	V_{GS} = 0 V, V_{DS} = 600 V			5	µA
		V_{GS} = 0 V, V_{DS} = 600 V, T_C = 125 °C(1)			100	
I_{GSS}	Gate-body leakage current	V_{DS} = 0 V, V_{GS} = ±25 V			±5	µA
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 250 µA	3.25	4	4.75	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS} = 10 V, I_D = 15 A		85	99	mΩ

1. *Specified by design, not tested in production.*

Table 5. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS}= 100 V, f = 1 MHz, V_{GS} = 0 V	-	1920	-	pF
C_{oss}	Output capacitance		-	120	-	pF
C_{rss}	Reverse transfer capacitance		-	2	-	pF
$C_{oss\ eq.}$ (1)	Equivalent output capacitance	V_{DS} = 0 to 480 V, V_{GS} = 0 V	-	310	-	pF
R_G	Intrinsic gate resistance	f = 1 MHz, I_D = 0 A	-	1.5	-	Ω
Q_g	Total gate charge	V_{DD} = 480 V, I_D = 30 A, V_{GS} = 0 to 10 V (see Figure 14. Test circuit for gate charge behavior)	-	44	-	nC
Q_{gs}	Gate-source charge		-	10	-	nC
Q_{gd}	Gate-drain charge		-	25	-	nC

1. *$C_{oss\ eq.}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}*

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 300 V, I_D = 15 A, R_G = 4.7 Ω, V_{GS} = 10 V (see Figure 15. Test circuit for inductive load switching and diode recovery times and Figure 18. Switching time waveform)	-	15	-	ns
t_r	Rise time		-	5.3	-	ns
$t_{d(off)}$	Turn-off delay time		-	50	-	ns
t_f	Fall time		-	7.3	-	ns

chanhvinh.com

Table 7. **Source-drain diode**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current		-		30	A
I_{SDM} (1)	Source-drain current (pulsed)		-		95	A
V_{SD} (2)	Forward on voltage	V_{GS} = 0 V, I_{SD} = 30 A	-		1.6	V
t_{rr}	Reverse recovery time	I_{SD} = 30 A, di/dt = 100 A/µs, V_{DD} = 60 V (see Figure 15. Test circuit for inductive load switching and diode recovery times)	-	110		ns
Q_{rr}	Reverse recovery charge		-	0.5		µC
I_{RRM}	Reverse recovery current		-	9		A
t_{rr}	Reverse recovery time	I_{SD} = 30 A, di/dt = 100 A/µs, V_{DD} = 60 V, T_J = 150 °C (see Figure 15. Test circuit for inductive load switching and diode recovery times)	-	215		ns
Q_{rr}	Reverse recovery charge		-	2		µC
I_{RRM}	Reverse recovery current		-	17		A

1. *Pulse width is limited by safe operating area*
2. *Pulsed: pulse duration = 300 µs, duty cycle 1.5%*

chanhvinh.com

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

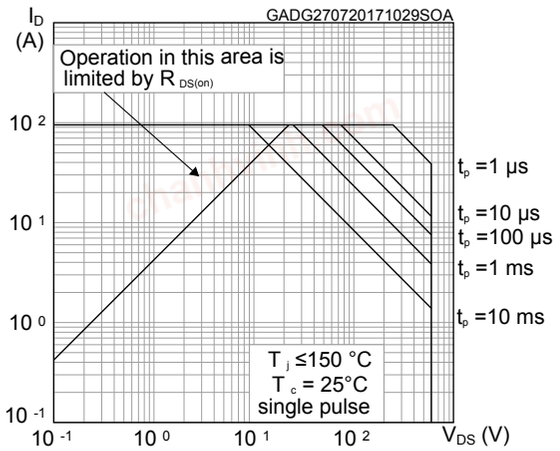


Figure 2. Normalized transient thermal impedance

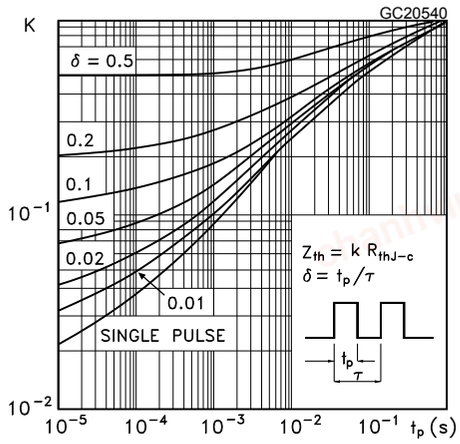


Figure 3. Typical output characteristics

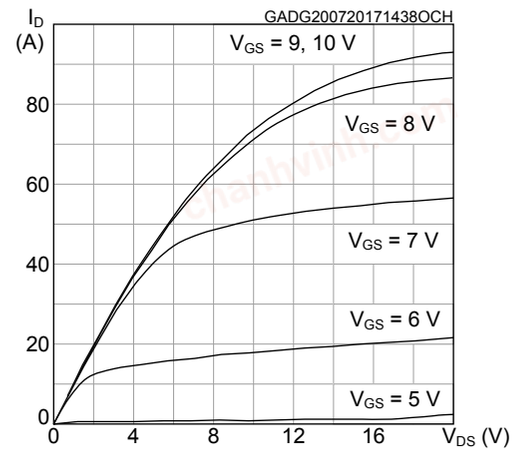


Figure 4. Typical transfer characteristics

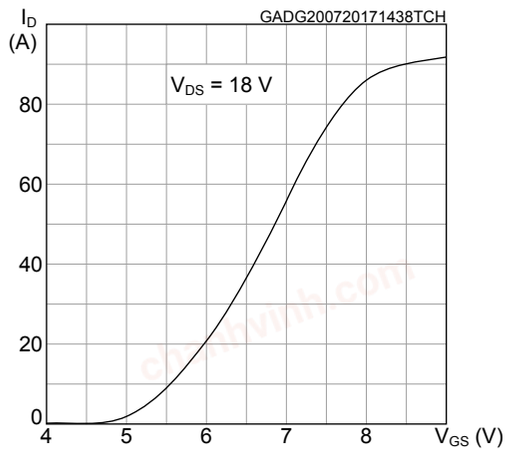


Figure 5. Typical gate charge characteristics


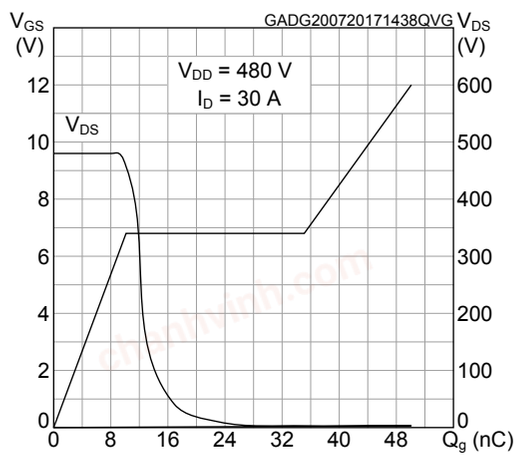


Figure 6. Typical drain-source on-resistance

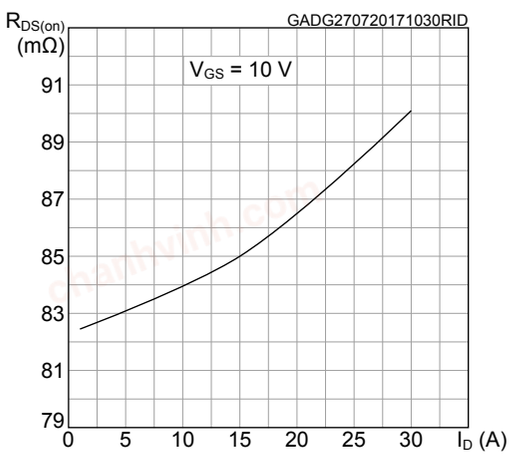

chanhvinh.com

Figure 7. Typical capacitance characteristics

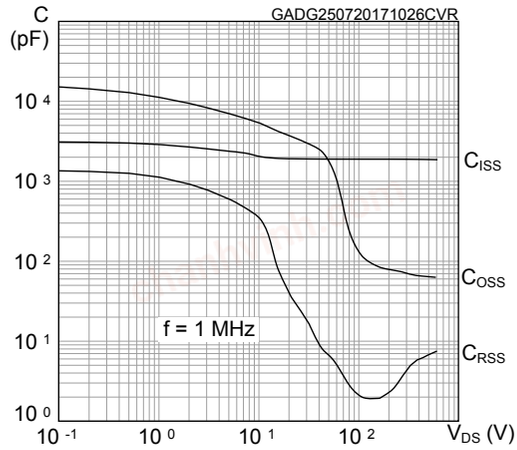


Figure 8. Normalized gate threshold vs temperature

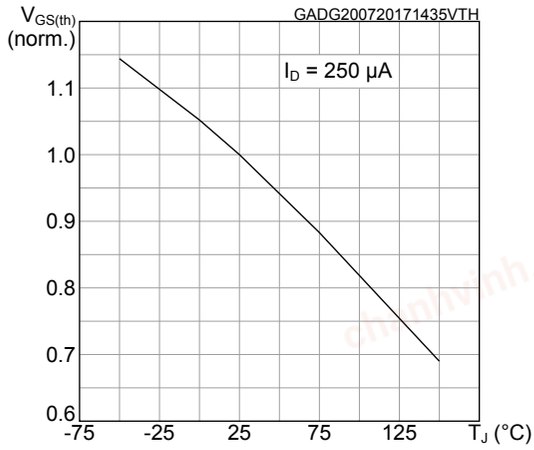


Figure 9. Normalized on-resistance vs temperature

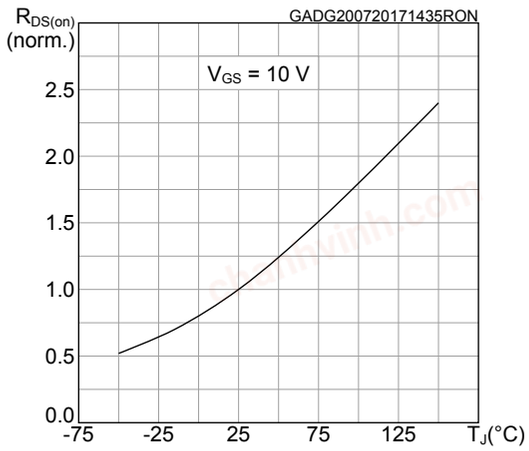


Figure 10. Normalized breakdown voltage vs temperature

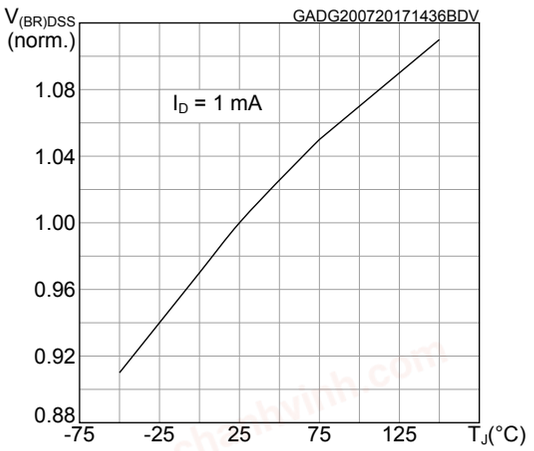


Figure 11. Typical reverse diode forward characteristics


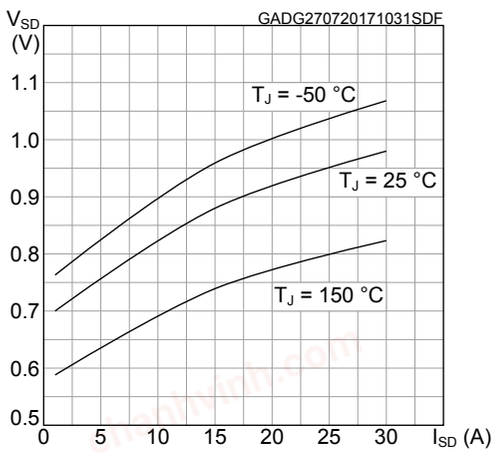



Figure 12. Output capacitance stored energy

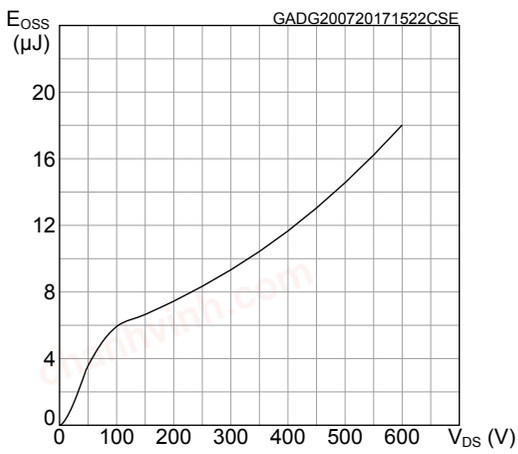

chanhvinh.com


3 Test circuits

Figure 13. Test circuit for resistive load switching times

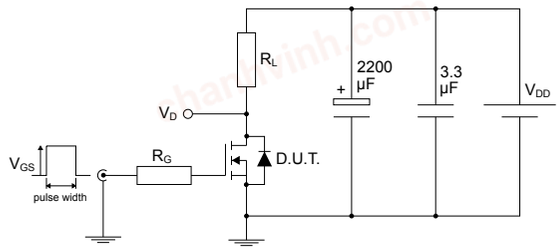


AM01468v1

Figure 14. Test circuit for gate charge behavior

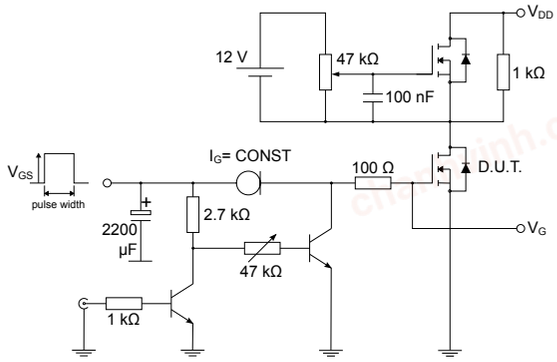


AM01469v1

Figure 15. Test circuit for inductive load switching and diode recovery times

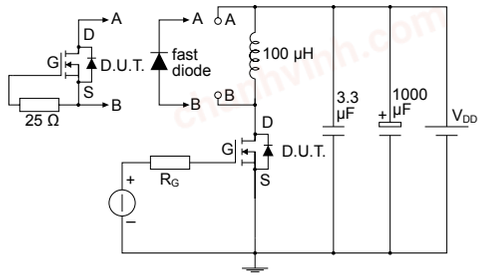


AM01470v1

Figure 16. Unclamped inductive load test circuit

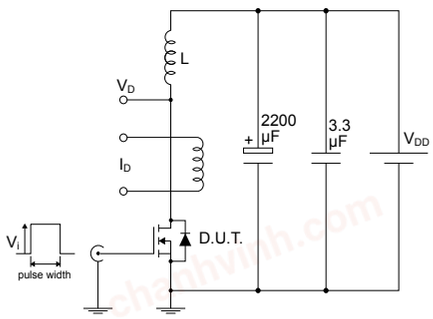


AM01471v1

Figure 17. Unclamped inductive waveform

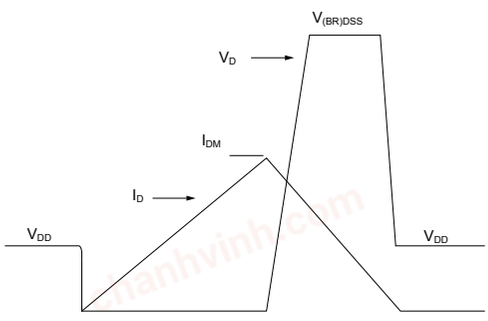

AM01472v1

Figure 18. Switching time waveform

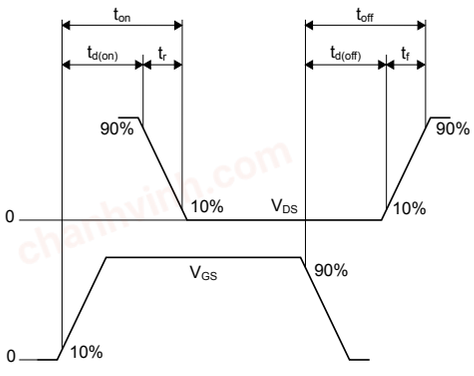

AM01473v1


chanhvinh.com

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 D²PAK (TO-263) type A2 package information

Figure 19. **D²PAK (TO-263) type A2 package outline**

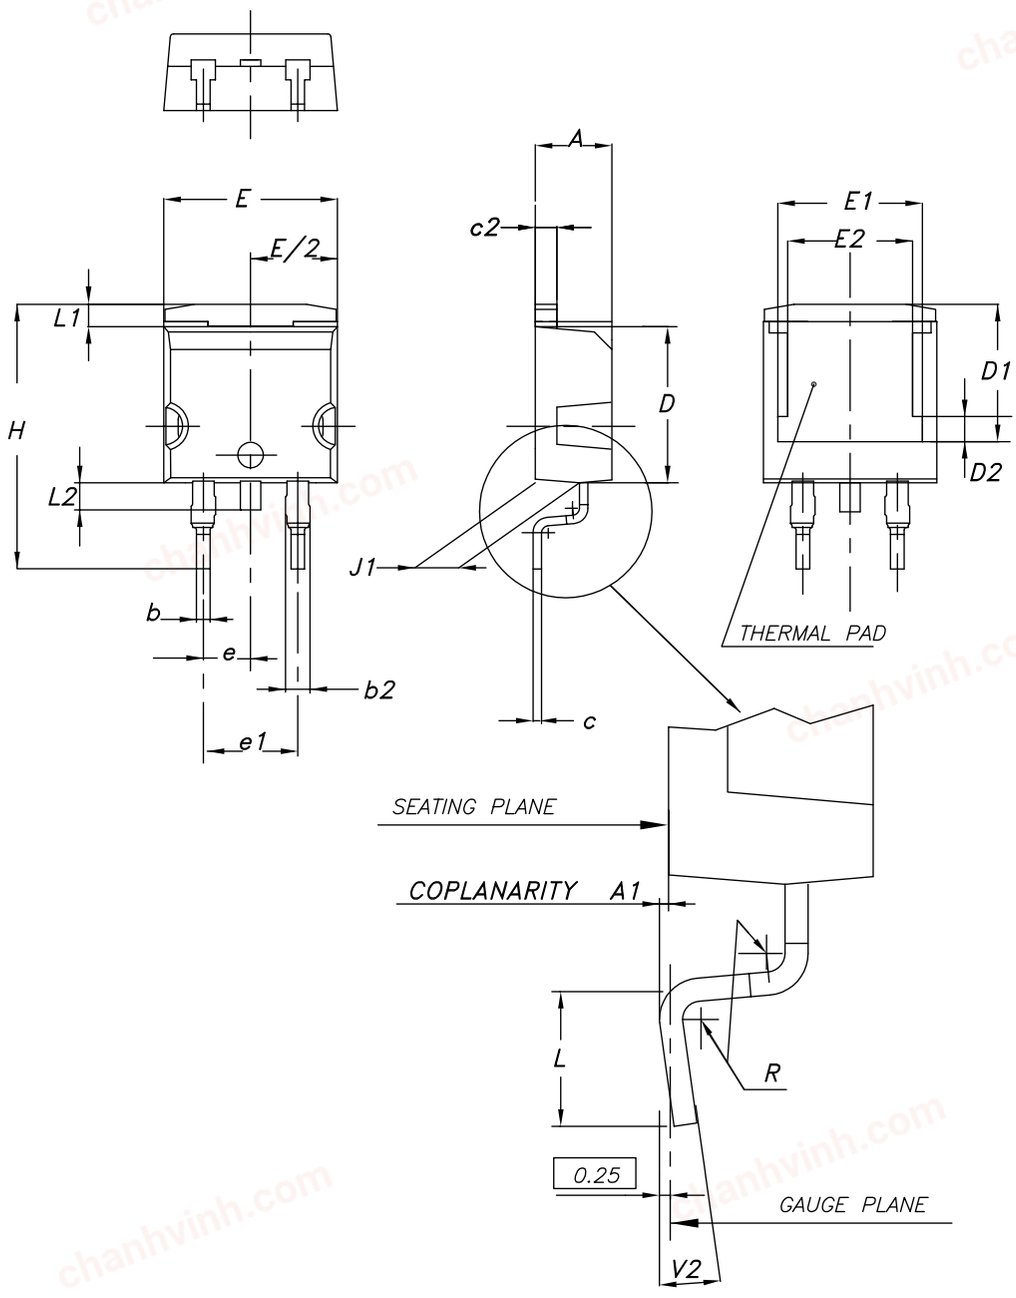

0079457_A2_27


chanhvinh.com

Table 8. **D²PAK (TO-263) type A2 package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
A1	0.03		0.23
b	0.70		0.93
b2	1.14		1.70
c	0.45		0.60
c2	1.23		1.36
D	8.95		9.35
D1	7.50	7.75	8.00
D2	1.10	1.30	1.50
E	10.00		10.40
E1	8.70	8.90	9.10
E2	7.30	7.50	7.70
e		2.54	
e1	4.88		5.28
H	15.00		15.85
J1	2.49		2.69
L	2.29		2.79
L1	1.27		1.40
L2	1.30		1.75
R		0.40	
V2	0°		8°

chanhvinh.com

Figure 20. D²PAK (TO-263) recommended footprint (dimensions are in mm)

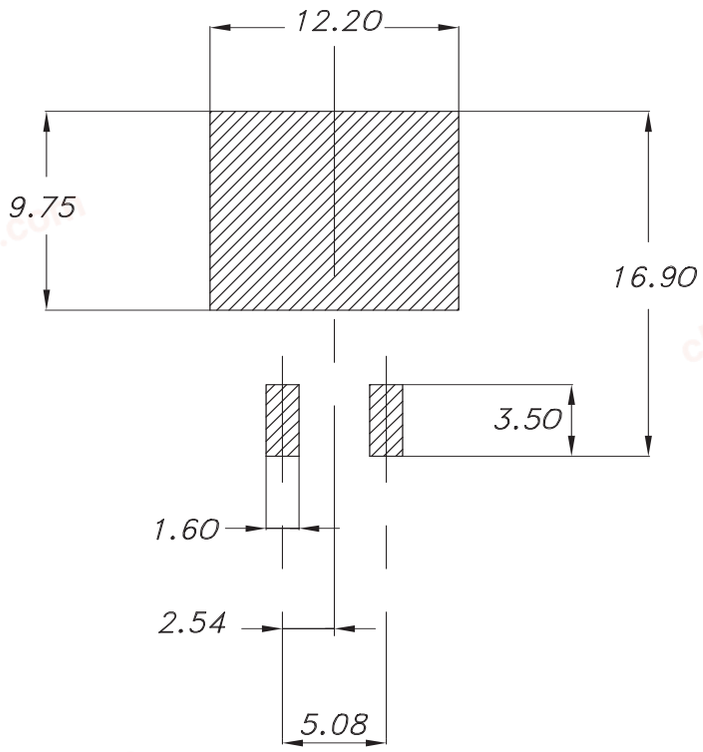


0079457_Rev27_footprint

chanhvinh.com


4.2 D²PAK packing information

Figure 21. D²PAK tape outline

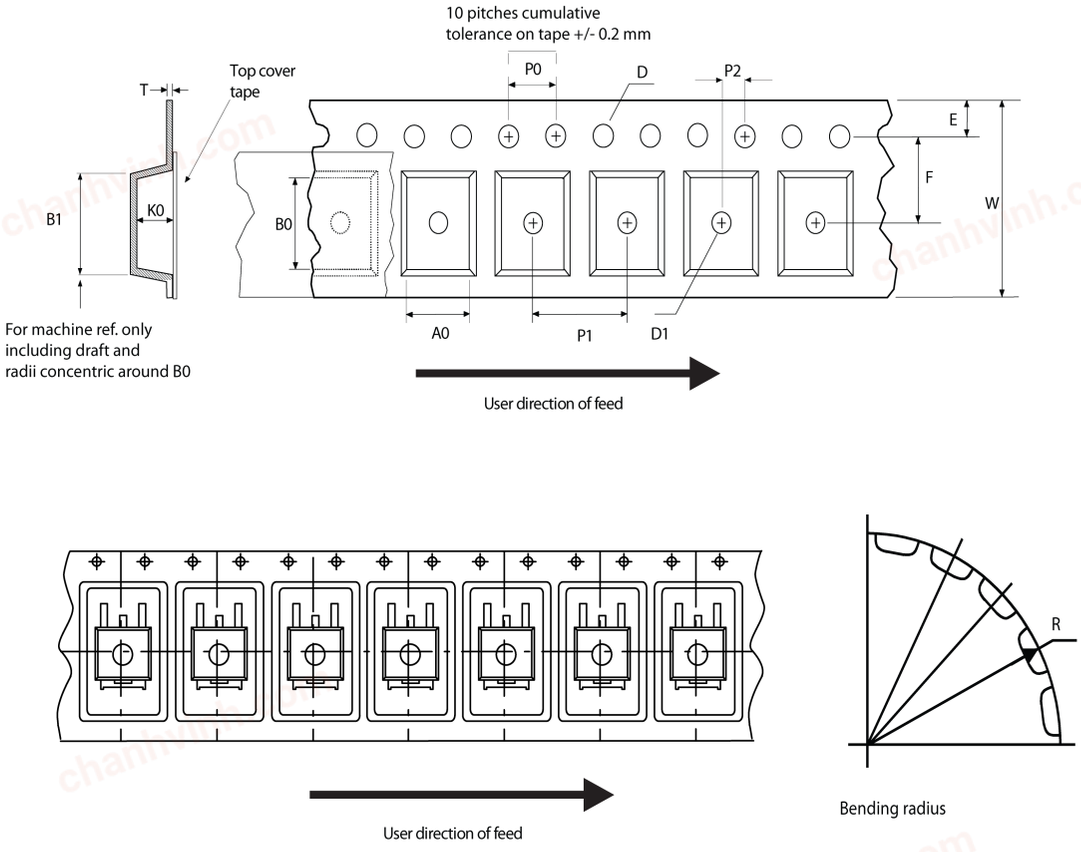

chanhvinh.com

Figure 22. D²PAK reel outline

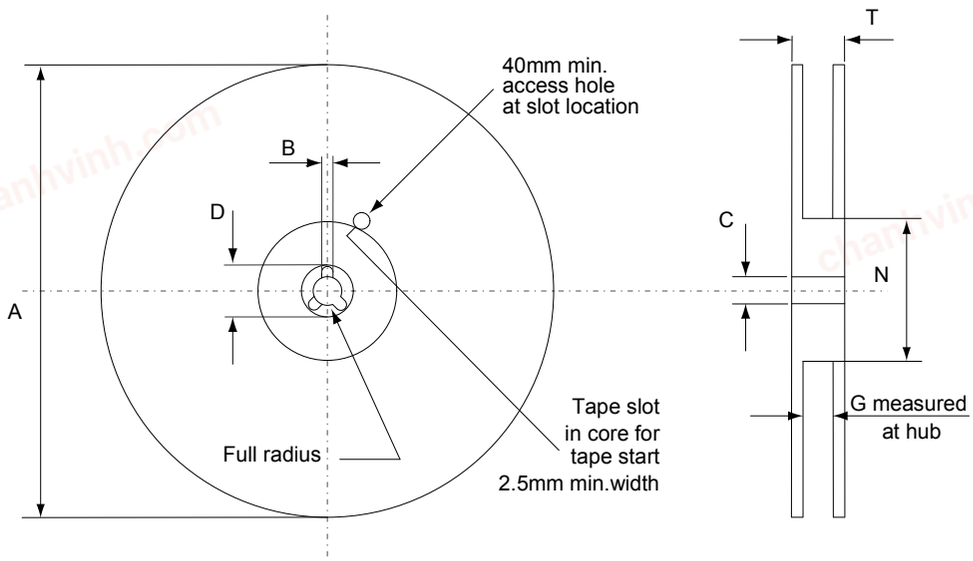

AM06038v1

Table 9. D²PAK tape and reel mechanical data

Tape			Reel		
Dim.	mm		Dim.	mm	
	Min.	Max.		Min.	Max.
A0	10.5	10.7	A		330
B0	15.7	15.9	B	1.5	
D	1.5	1.6	C	12.8	13.2
D1	1.59	1.61	D	20.2	
E	1.65	1.85	G	24.4	26.4
F	11.4	11.6	N	100	
K0	4.8	5.0	T		30.4
P0	3.9	4.1			
P1	11.9	12.1	Base quantity		1000
P2	1.9	2.1	Bulk quantity		1000
R	50				
T	0.25	0.35			
W	23.7	24.3			

chanhvinh.com

Revision history

Table 10. **Document revision history**

Date	Revision	Changes
03-Apr-2024	1	First release.

chanhvinh.com

chanhvinh.com

Contents

1 **Electrical ratings** 2
2 **Electrical characteristics** 3
2.1 Electrical characteristics (curves) 5
3 **Test circuits** 7
4 **Package information** 8
4.1 D²PAK (TO-263) type A2 package information 8
4.2 D²PAK packing information 11
Revision history 13

chanhvinh.com

chanhvinh.com

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved

chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com
chanhvinh.com