
chanhvinh.com

life.augmented


STF80N600K6

Datasheet

N-channel 800 V, 515 mΩ typ., 7 A MDmesh K6 Power MOSFET in a TO-220FP package



TO-220FP



Features

Order code	V_{DS}	$R_{DS(on)}$ max.	I_D
STF80N600K6	800 V	600 mΩ	7 A

- Worldwide best $R_{DS(on)}$ x area
- Worldwide best FOM (figure of merit)
- Ultra low gate charge
- 100% avalanche tested
- Zener-protected

Applications

- Flyback converter
- LED lighting
- Smart chargers and adapters

Description

This very high voltage N-channel Power MOSFET is designed using the ultimate MDmesh K6 technology based on 20 years STMicroelectronics experience on super junction technology. The result is the best-in-class on-resistance per area and gate charge for applications requiring superior power density and high efficiency.

Product status link
STF80N600K6

Product summary	
Order code	STF80N600K6
Marking	80N600K6
Package	TO-220FP
Packing	Tube

chanhvinh.com

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{GS}	Gate-source voltage	±30	V
I_D (1)	Drain current (continuous) at T_C = 25 °C	7	A
	Drain current (continuous) at T_C = 100 °C	5	
I_{DM}(2)	Drain current (pulsed)	15	A
P_{TOT}	Total power dissipation at T_C = 25 °C	23	W
dv/dt(3)	Peak diode recovery voltage slope	5	V/ns
di/dt(3)	Peak diode recovery current slope	100	A/µs
dv/dt(4)	MOSFET dv/dt ruggedness	120	V/ns
V_{ISO}	Insulation withstand voltage (RMS) from all three leads to external heat sink (t = 1 s, T_C = 25 °C)	2.5	kV
T_{stg}	Storage temperature range	-55 to 150	°C
T_J	Operating junction temperature range		

1. *Limited by package.*
2. *Pulse width limited by safe operating area.*
3. *I_{SD} ≤ 3.5 A, V_{DS} (peak) = 400 V.*
4. *V_{DS} ≤ 640 V.*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance, junction-to-case	5.4	°C/W
R_{thJA}	Thermal resistance, junction-to-ambient	62.5	°C/W

Table 3. Avalanche characteristics

Symbol	Parameter	Value	Unit
I_{AR}	Avalanche current, repetitive or not repetitive (pulse width limited by T_J max.)	2.3	A
E_{AS}	Single pulse avalanche energy (starting T_J = 25 °C, I_D = I_{AR}, V_{DD} = 50 V)	85	mJ

chanhvinh.com

2 Electrical characteristics

T_C = 25 °C unless otherwise specified.

Table 4. On/off-state

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS} = 0 V, I_D = 1 mA	800			V
I_{DSS}	Zero gate voltage drain current	V_{GS} = 0 V, V_{DS} = 800 V			1	µA
		V_{GS} = 0 V, V_{DS} = 800 V, T_C = 125 °C(1)			50	µA
I_{GSS}	Gate body leakage current	V_{DS} = 0 V, V_{GS} = ±20 V			±1	µA
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 100 µA	3.0	3.5	4.0	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS} = 10 V, I_D = 3 A		515	600	mΩ

1. *Specified by design, not tested in production.*

Table 5. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS} = 400 V, f = 1 MHz, V_{GS} = 0 V	-	540	-	pF
C_{oss}	Output capacitance		-	7.5	-	pF
$C_{o(er)}$(1)	Equivalent capacitance energy related	V_{DS} = 0 to 640 V, V_{GS} = 0 V	-	11	-	pF
$C_{o(tr)}$(2)	Equivalent capacitance time related		-	61	-	pF
R_G	Intrinsic gate resistance	f = 1 MHz , I_D = 0 A	-	2.8	-	Ω
Q_g	Total gate charge	V_{DD} = 640 V, I_D = 3.5 A, V_{GS} = 0 to 10 V (see Figure 18. Test circuit for gate charge behavior)	-	10.7	-	nC
Q_{gs}	Gate-source charge		-	2.9	-	nC
Q_{gd}	Gate-drain charge		-	3.4	-	nC

1. *$C_{o(er)}$ is a constant capacitance value that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 V to the stated value.*
2. *$C_{o(tr)}$ is a constant capacitance value that gives the same charging time as C_{oss} while V_{DS} is rising from 0 V to the stated value.*

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 400 V, I_D = 3.5 A, R_G = 4.7 Ω, V_{GS} = 10 V see (Figure 16. Test circuit for resistive load switching times and Figure 17. Switching time waveform)	-	9	-	ns
t_r	Rise time		-	4.1	-	ns
$t_{d(off)}$	Turn-off delay time		-	28.2	-	ns
t_f	Fall time		-	12.6	-	ns

chanhvinh.com

Table 7. Source-drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD} (1)	Source-drain current		-		7	A
I_{SDM} (2)	Source-drain current (pulsed)		-		15	A
V_{SD} (3)	Forward on voltage	I_{SD} = 7 A, V_{GS} = 0 V	-		1.5	V
t_{rr}	Reverse recovery time	I_{SD} = 7 A, di/dt = 100 A/µs,	-	235		ns
Q_{rr}	Reverse recovery charge	V_{DD} = 60 V	-	2.5		µC
I_{RRM}	Reverse recovery current	(see Figure 19. Test circuit for inductive load switching and diode recovery times)	-	17.7		A
t_{rr}	Reverse recovery time	I_{SD} = 7 A, di/dt = 100 A/µs,	-	372		ns
Q_{rr}	Reverse recovery charge	V_{DD} = 60 V, T_J = 150 °C	-	3.7		µC
I_{RRM}	Reverse recovery current	(see Figure 19. Test circuit for inductive load switching and diode recovery times)	-	15.2		A

1. *Limited by package.*
2. *Pulse width limited by safe operating area.*
3. *Pulsed: pulse duration = 300 µs, duty cycle 1.5%.*

chanhvinh.com

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

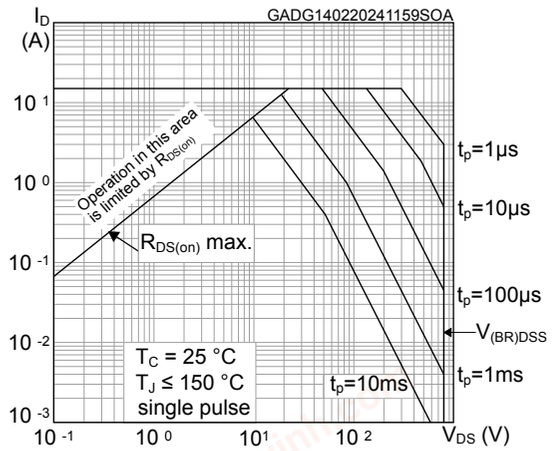


Figure 2. Maximum transient thermal impedance

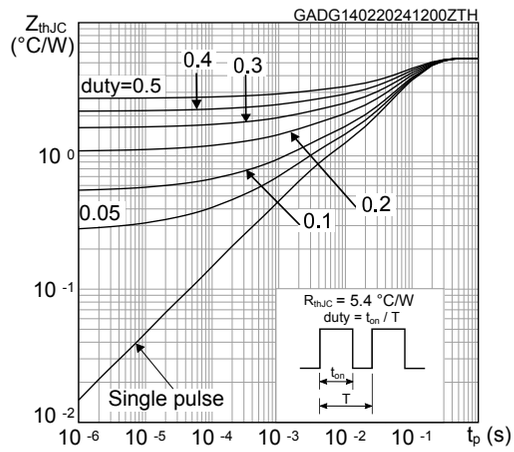


Figure 3. Typical output characteristics

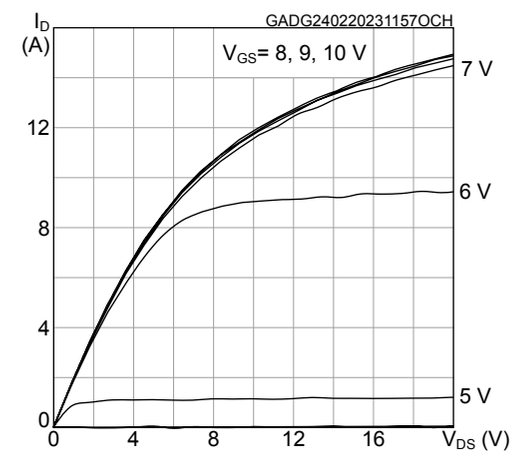


Figure 4. Typical transfer characteristics

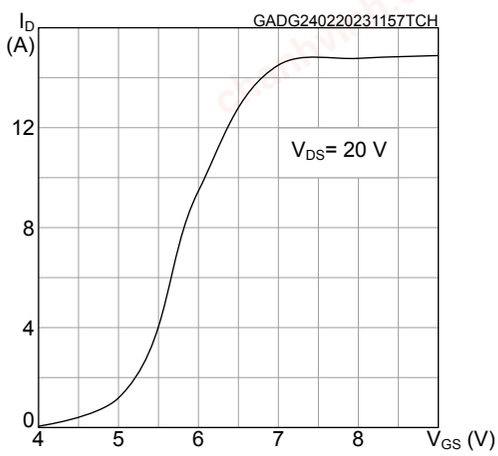


Figure 5. Typical drain-source on-resistance


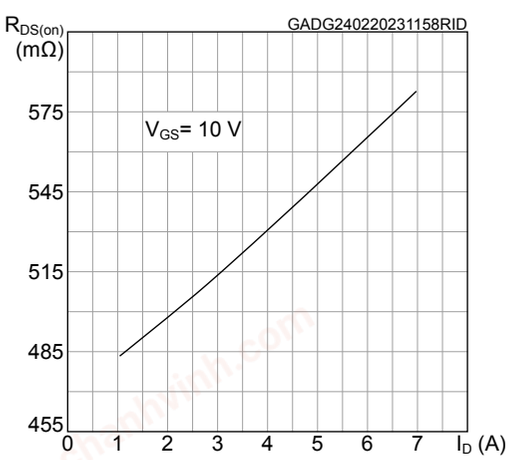


Figure 6. Normalized on-resistance vs temperature

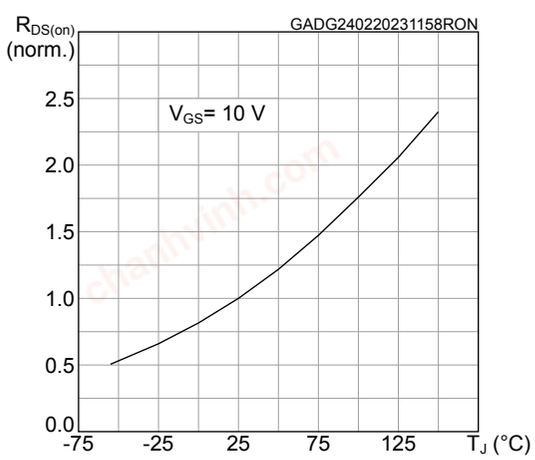

chanhvinh.com

Figure 7. Typical gate charge characteristics

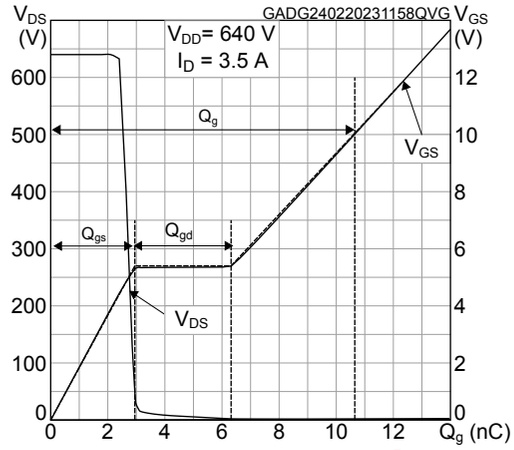


Figure 8. Typical capacitance characteristics

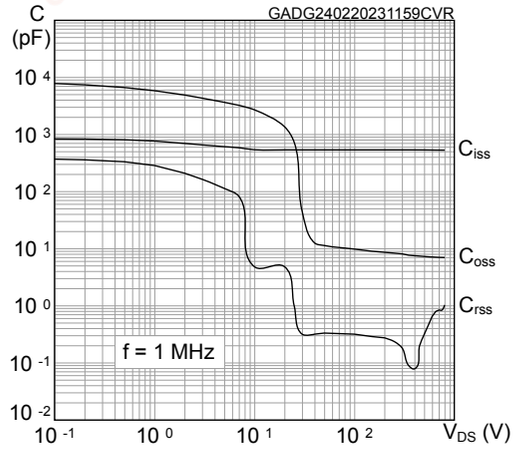


Figure 9. Normalized gate threshold vs temperature

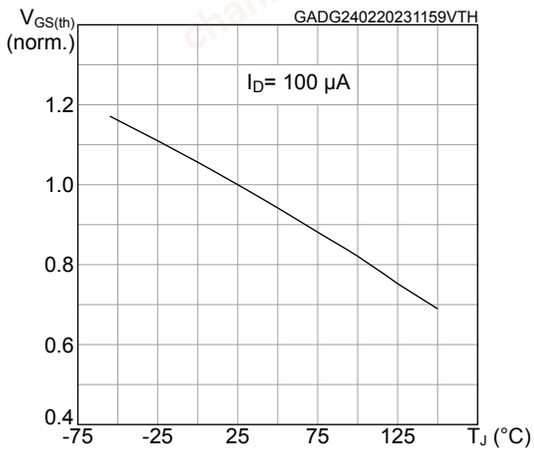


Figure 10. Normalized breakdown voltage vs temperature

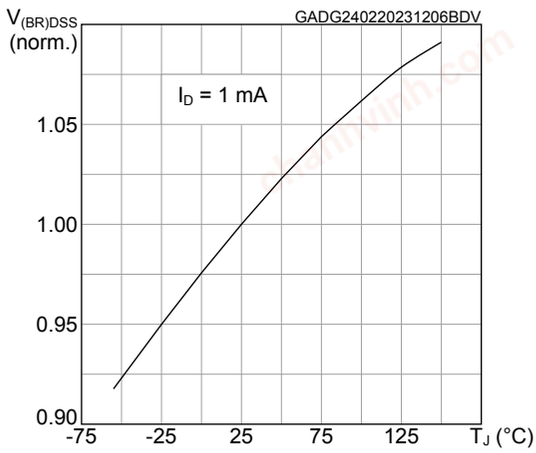


Figure 11. Typical output capacitance stored energy


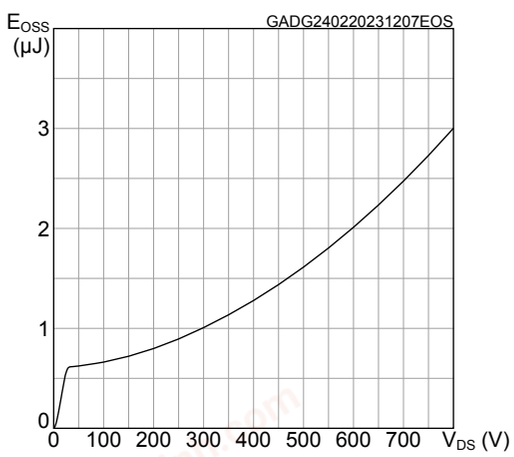


Figure 12. Maximum avalanche energy vs temperature

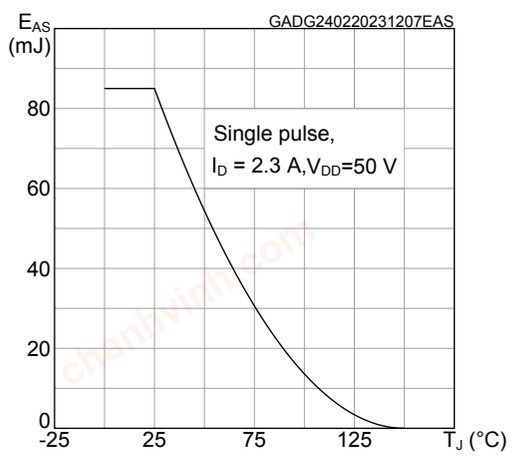

chanhvinh.com

Figure 13. Typical reverse diode forward characteristics

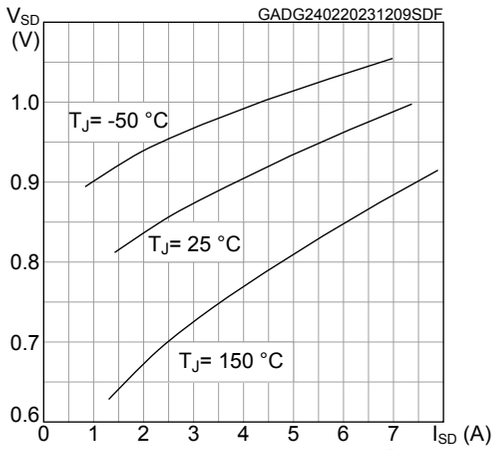


Figure 14. Typical inductive load switching energy vs I_D


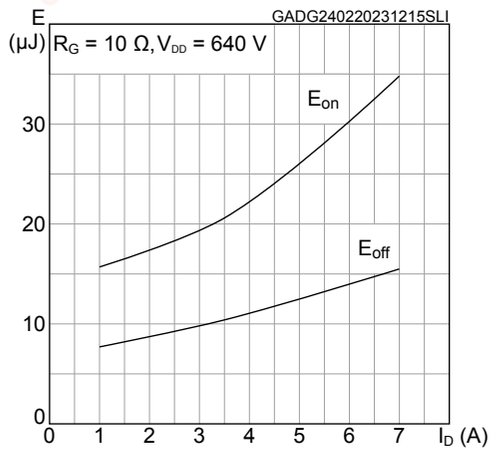



Figure 15. Typical inductive load switching energy vs R_G

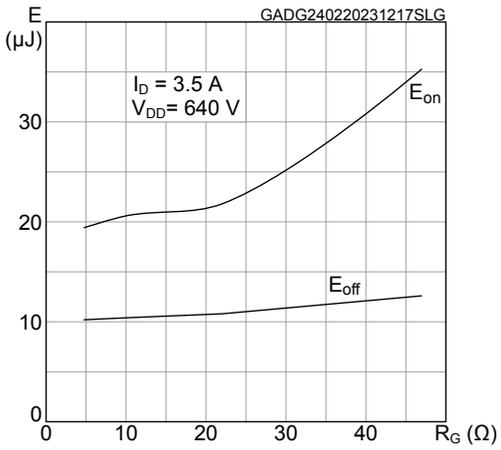

chanhvinh.com


3 Test circuits

Figure 16. Test circuit for resistive load switching times

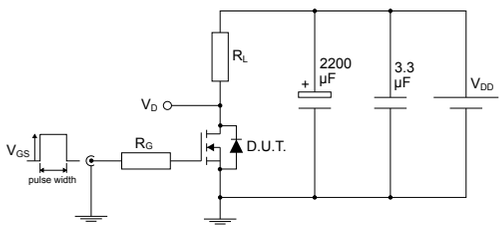


AM01468v1

Figure 17. Switching time waveform

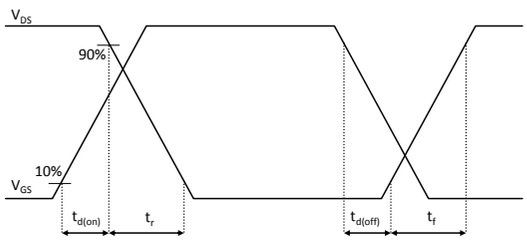


GADG280620211209SA

Figure 18. Test circuit for gate charge behavior

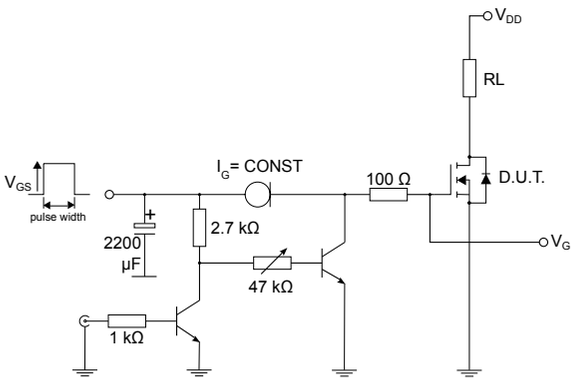


AM01469v10

Figure 19. Test circuit for inductive load switching and diode recovery times

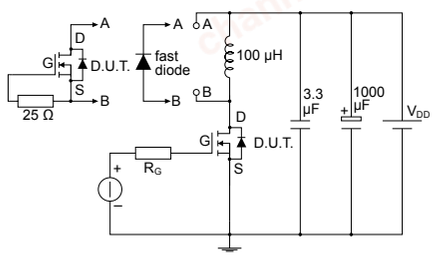


AM01470v1

Figure 20. Unclamped inductive load test circuit

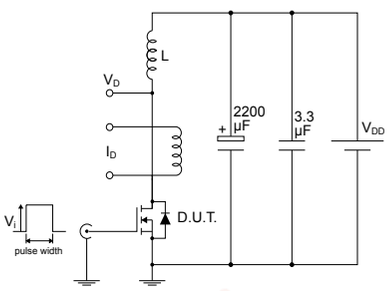

AM01471v1

Figure 21. Unclamped inductive waveform

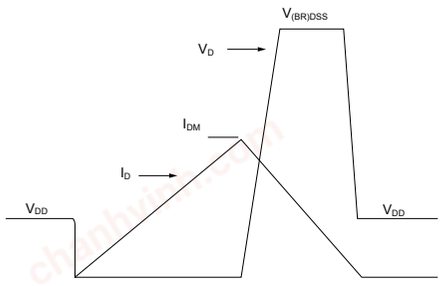

AM01472v1


chanhvinh.com

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

4.1 TO-220FP type B package information

Figure 22. **TO-220FP type B package outline**

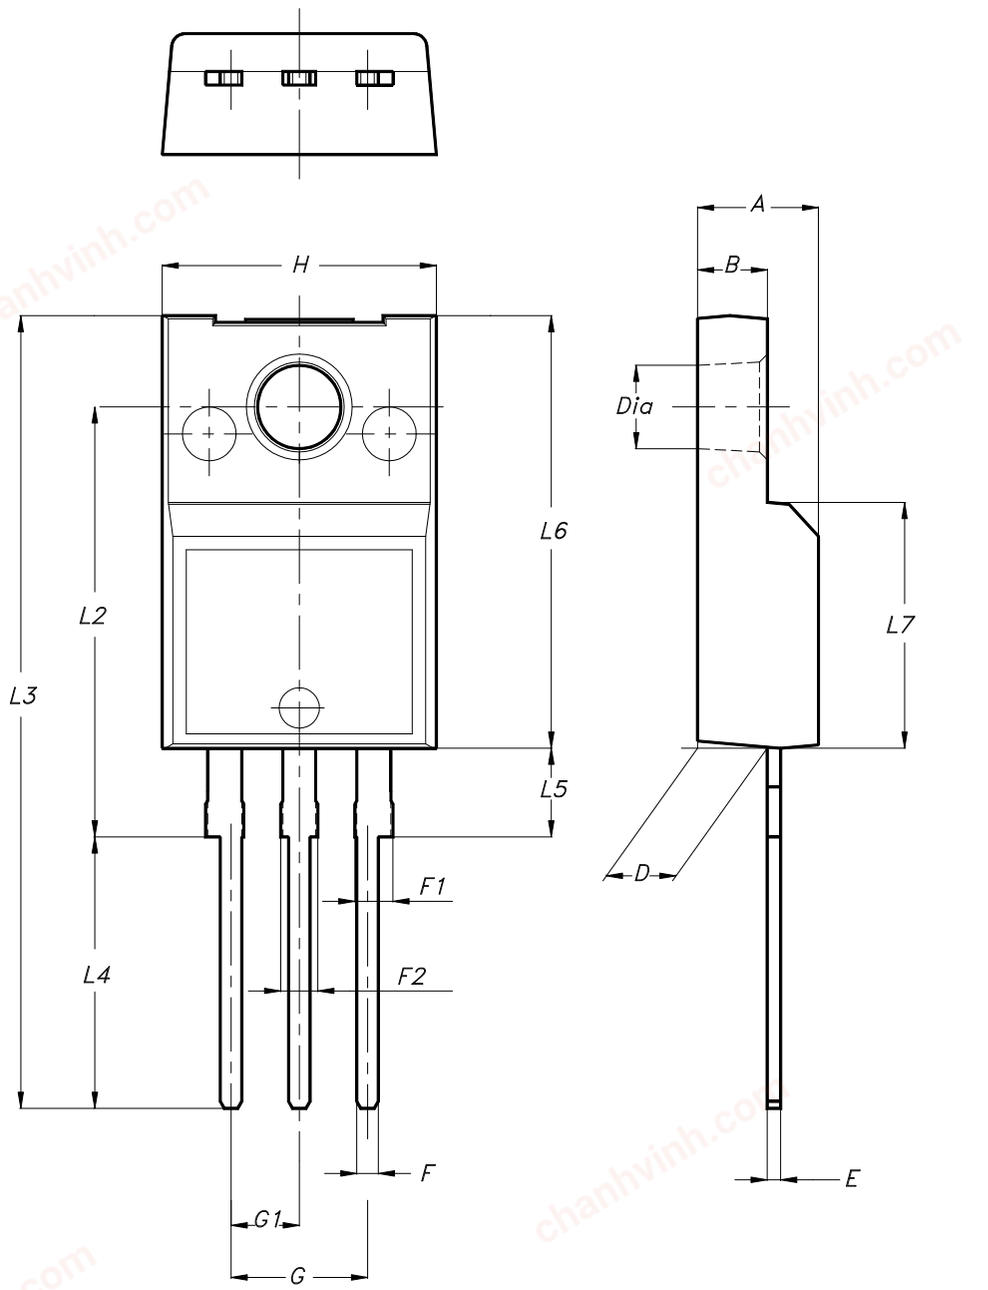

7012510_B_rev.14

chanhvinh.com

Table 8. **TO-220FP type B package mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A	4.40		4.60
B	2.50		2.70
D	2.50		2.75
E	0.45		0.70
F	0.75		1.00
F1	1.15		1.70
F2	1.15		1.70
G	4.95		5.20
G1	2.40		2.70
H	10.00		10.40
L2		16.00	
L3	28.60		30.60
L4	9.80		10.60
L5	2.90		3.60
L6	15.90		16.40
L7	9.00		9.30
Dia	3.00		3.20

chanhvinh.com

Revision history

Table 9. **Document revision history**

Date	Revision	Changes
19-Feb-2024	1	First release.
10-Jul-2024	2	Updated Applications on cover page. Minor text changes.

chanhvinh.com

Contents

1 **Electrical ratings** 2
2 **Electrical characteristics** 3
2.1 Electrical characteristics (curves) 5
3 **Test circuits** 8
4 **Package information** 9
4.1 TO-220FP type B package information 9
Revision history 11

chanhvinh.com

chanhvinh.com

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved