
chanhvinh.com

life.augmented

STPSC40H12C-Y

Datasheet

40 A 1200 V power Schottky silicon carbide diode

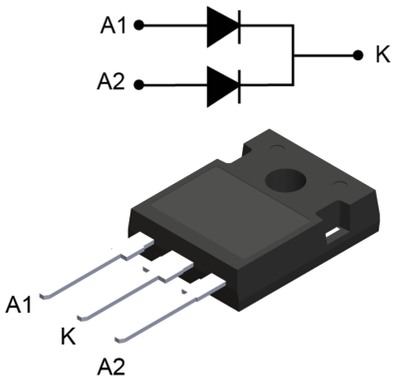

TO-247

Features

- AEC-Q101 qualified
- No or negligible reverse recovery
- Switching behavior independent of temperature
- Robust high-voltage periphery
- PPAP capable
- Operating T_j from -40 °C to 175 °C
- ECOPACK2 compliant

Applications

- OBC (On Board Battery chargers)
- PHEV - EV charging stations
- Resonant LLC topology
- PFC functions (Power Factor Corrector)

Description

The SiC diode, available in TO-247, is an ultrahigh performance power Schottky rectifier. It is manufactured using a silicon carbide substrate. The wide band-gap material allows the design of a low V_F Schottky diode structure with a 1200 V rating.

Due to the Schottky construction, no recovery is shown at turn-off and ringing patterns are negligible. The minimal capacitive turn-off behavior is independent of temperature.

Especially suited for use in PFC and secondary side applications, this ST SiC diode will boost the performance in hard switching conditions. This rectifier will enhance the performance of the targeted application. Its high forward surge capability ensures a good robustness during transient phases.

Product status link
STPSC40H12C-Y

Product summary	
$I_{F(AV)}$	2 x 20 A
V_{RRM}	1200 V
T_j (max.)	175 °C
V_F (typ.)	1.35 V

Product label
SUSTAINABLE TECHNOLOGY

chanhvinh.com

1 Characteristics

Table 1. Absolute ratings (limiting values per diode at 25 °C , unless otherwise specified)

Symbol	Parameter			Value	Unit
V_{RRM}	Repetitive peak reverse voltage (T_j = -40 °C to +175 °C)			1200	V
$I_{F(RMS)}$	Forward rms current			38	A
$I_{F(AV)}$	Average forward current	T_c = 150 °C, DC current	Per diode	20	A
			Per device	40	
I_{FSM}	Surge non repetitive forward current	t_p = 10 ms sinusoidal	T_c = 25 °C	140	A
		t_p = 10 ms sinusoidal	T_c = 150 °C	120	
T_{stg}	Storage temperature range			-55 to +175	°C
T_j	Operating junction temperature range			-40 to +175	°C

Table 2. Thermal resistance parameters

Symbol	Parameter		Value		Unit
			Typ.	Max.	
$R_{th(j-c)}$	Junction to case	Per diode	0.40	0.55	°C/W
		Per device	0.20	0.28	

For more information, please refer to the following application note:

- AN5088: Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics (per diode)

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
I_R (1)	Reverse leakage current	T_j = 25 °C	$V_R = V_{RRM}$	-	10	120	µA
		T_j = 150 °C		-	60	800	
V_F (2)	Forward voltage drop	T_j = 25 °C	I_F = 20 A	-	1.35	1.50	V
		T_j = 150 °C		-	1.75	2.25	

1. *Pulse test: t_p = 10 ms, δ < 2%*
2. *Pulse test: t_p = 500 µs, δ < 2%*

To evaluate the conduction losses, use the following equation:

$P = 1.07 \times I_{F(AV)} + 0.059 \times I_F{}^2{}_{(RMS)}$

For more information, please refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

chanhvinh.com

Table 4. Dynamic electrical characteristics (per diode)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Q_{Cj} (1)	Total capacitive charge	V_R = 800 V	-	129	-	nC
C_j	Total capacitance	V_R = 0 V, T_c = 25 °C, F = 1 MHz	-	1650	-	pF
		V_R = 800 V, T_c = 25 °C, F = 1 MHz	-	110	-	

1. *Most accurate value for the capacitive charge:* $Q_{cj}(V_R) = \int_0^{V_R} C_j(V)dV$

chanhvinh.com

1.1 Characteristics (curves)

Figure 1. Forward voltage drop versus forward current (typical values, per diode)

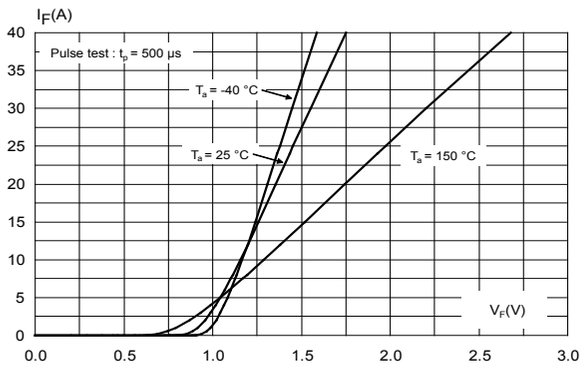


Figure 2. Reverse leakage current versus reverse voltage applied (typical values, per diode)

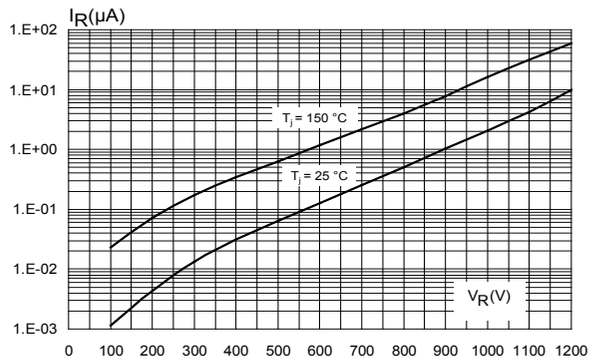


Figure 3. Peak forward current versus case temperature (per diode)

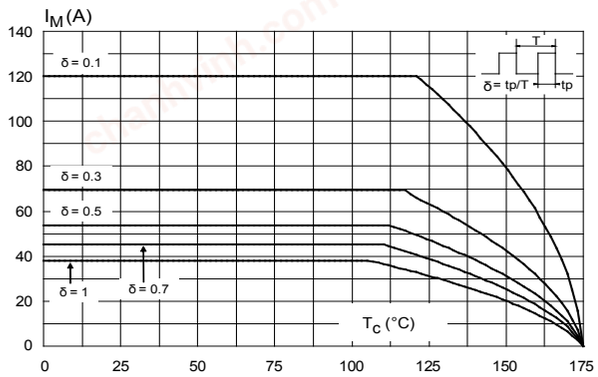


Figure 4. Junction capacitance versus reverse voltage applied (typical values, per diode)

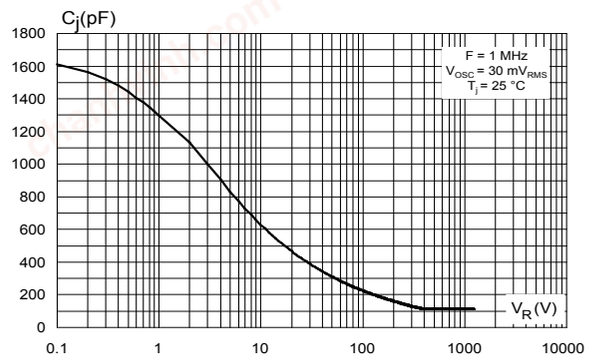


Figure 5. Relative variation of thermal impedance junction to case versus pulse duration



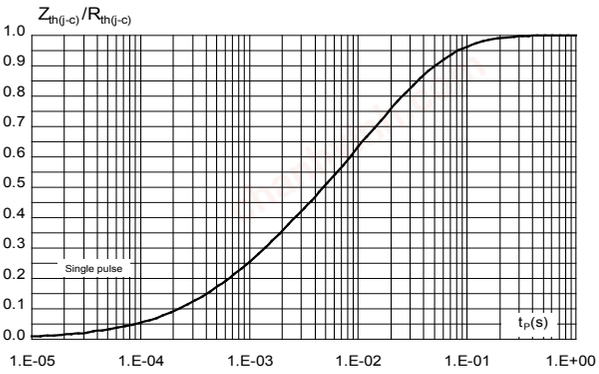


Figure 6. Non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform, per diode)

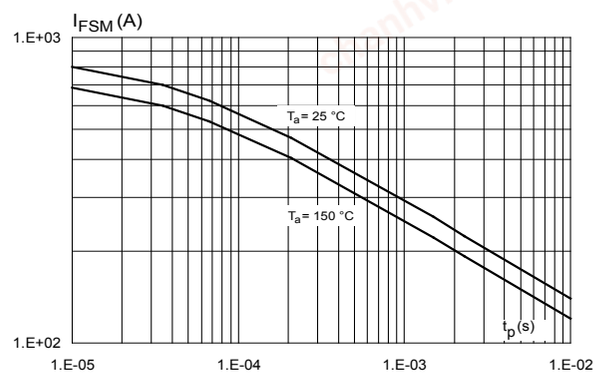

chanhvinh.com

Figure 7. **Total capacitive charges versus reverse voltage applied (typical values, per diode)**

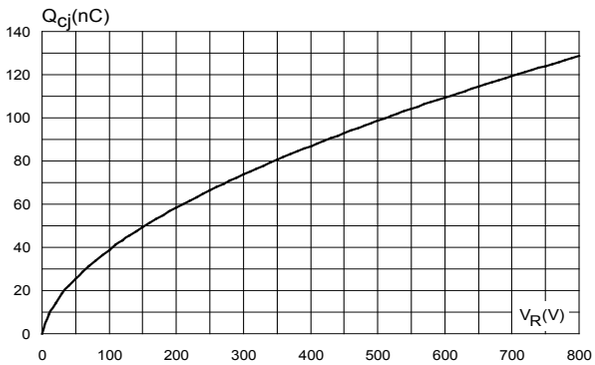

chanhvinh.com


2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 TO-247 package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 N·m
- Maximum torque value: 1.0 N·m

Figure 8. TO-247 package outline

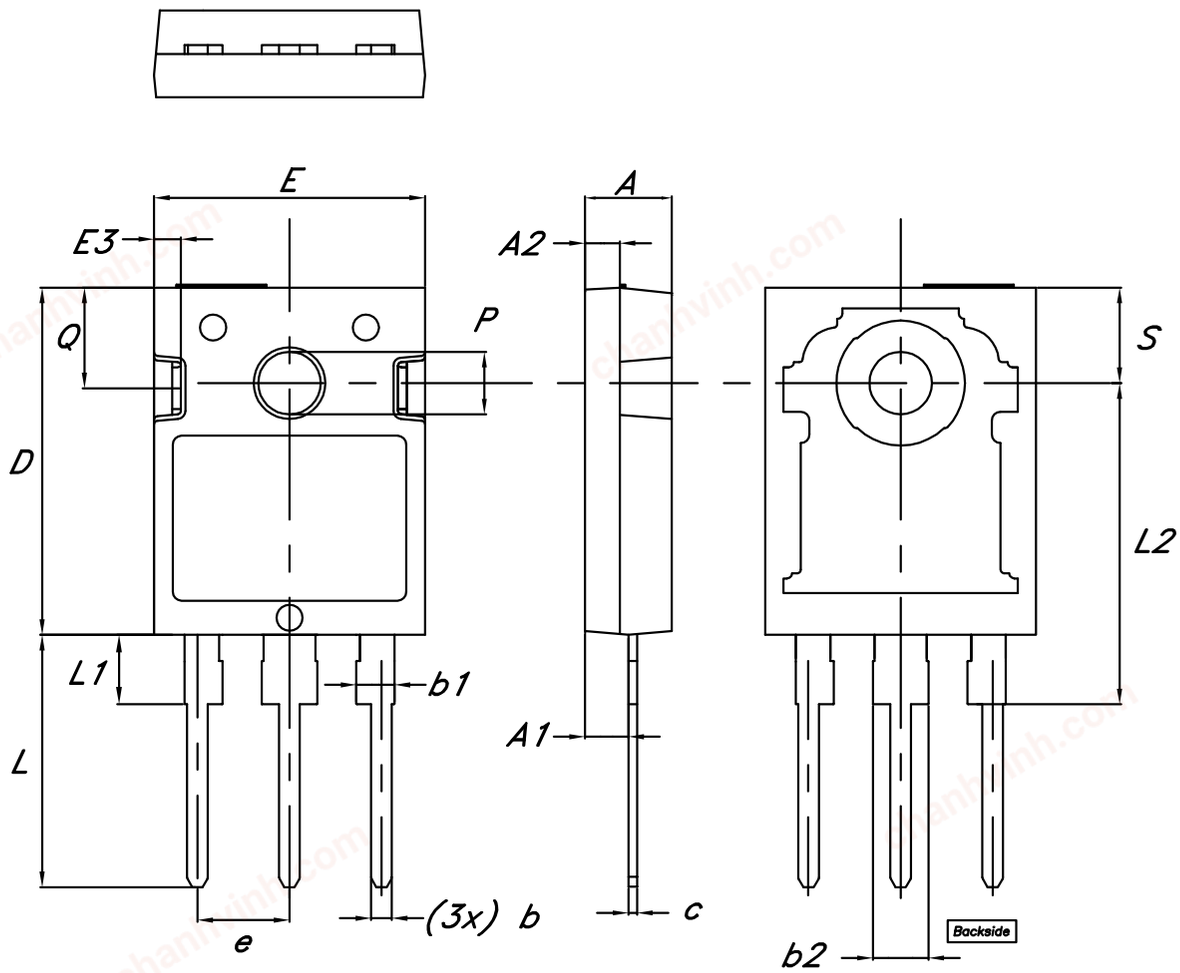

chanhvinh.com

Table 5. **TO-247 package mechanical data**

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.85	5.00	5.15	0.191	0.197	0.203
A1	2.20		2.60	0.086		0.102
A2	1.90	2.00	2.10	0.075	0.078	0.083
b	1.00		1.40	0.039		0.055
b1	2.00		2.40	0.078		0.094
b2	3.00		3.40	0.118		0.133
c	0.40		0.80	0.015		0.031
D	19.85	20.00	20.15	0.781	0.787	0.793
E	15.45	15.60	15.75	0.608	0.614	0.620
E3	1.45		1.65	0.057		0.065
e	5.30	5.45	5.60	0.209	0.215	0.220
L	14.20		14.80	0.559		0.582
L1	3.70		4.30	0.145		0.169
L2	18.30	18.50	18.70	0.720	0.728	0.737
ØP	3.55		3.65	0.139		0.143
Q	5.65		5.95	0.222		0.234
S	5.30	5.50	5.70	0.209	0.216	0.224

chanhvinh.com

3 Ordering information

Table 6. **Ordering information**

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STPSC40H12CWY	SC40H12CWY	TO-247	5.40 g	30	Tube

chanhvinh.com

Revision history

Table 7. **Document revision history**

Date	Revision	Changes
27-Jan-2021	1	First issue.

chanhvinh.com

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved