chanhvinh.com

TSL6201, TSL6202, TSL6204

Datasheet

High bandwidth 6 MHz, rail-to-rail, 5 V cost-effective Op Amp



TSL6201



TSL6202



TSL6204

Features

- Gain bandwidth product 6 MHz, unity gain stable
- Rail-to-rail input and output
- Wide supply voltage range: 2.5 V to 5.5 V
- Input offset voltage: 4.5 mV
- Low input bias current: 1 pA typ.
- Extended temperature range: -40 °C to +125 °C

Applications

- Cost-sensitive applications
- Battery-powered products

Description

The TSL6201, TSL6202 and the TSL6204 are single, dual and quad 6 MHz bandwidth unity-gain-stable amplifiers. The rail-to-rail input stage and the wide supply range from 2.5 V to 5.5 V make the TSL620x ideal for low voltage signal conditioning.

Product status link	
SOT23-5	TSL6201
MiniSO8	TSL6202
TSSOP14	TSL6204

Related products	
For more power savings	TSL6001

chanhvinh.com

1 Pin description

1.1 TSL6201 single operational amplifier

Figure 1. SOT23-5 pin connections (top view)

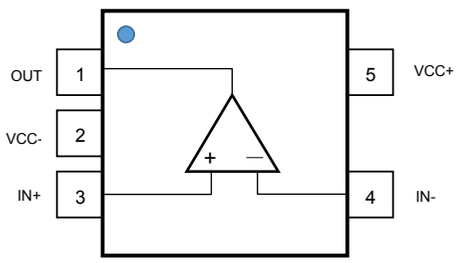


Table 1. SOT23-5 pin description

Pin	Pin name	Description
1	OUT	Output
2	VCC-	Negative supply voltage
3	IN+	Non-inverting input
4	IN-	Inverting input
5	VCC+	Positive supply voltage

chanhvinh.com

1.2 TSL6202 dual operational amplifier

Figure 2. **MiniSO8 pin connection (top view)**

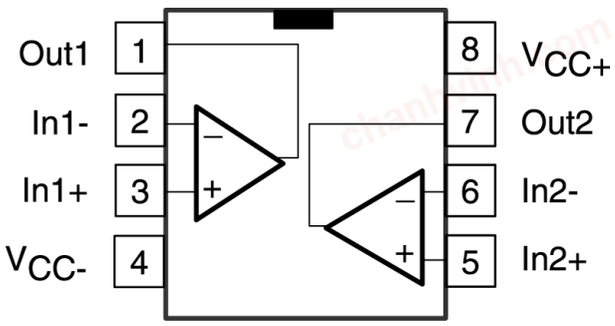


Table 2. **MiniSO8 pin description**

Pin	Pin name	Description
1	OUT1	Output channel 1
2	IN1-	Inverting input channel 1
3	IN1+	Non-inverting input channel 1
4	VCC-	Negative supply voltage
5	IN2+	Non-inverting input channel 2
6	IN2-	Inverting input channel 2
7	OUT2	Output channel 2
8	VCC+	Positive supply voltage

chanhvinh.com

1.3 TSL6204 quad operational amplifier

Figure 3. **TSSOP-14 pin connections (top view)**

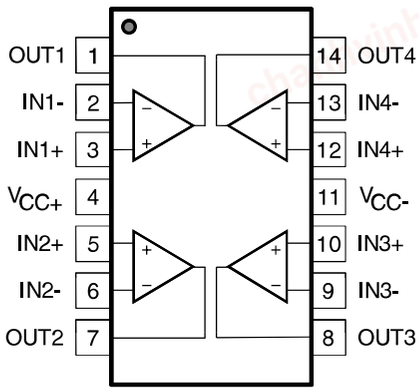


Table 3. **TSSOP-14 pin description**

Pin	Pin name	Description
1	OUT1	Output channel 1
2	IN1-	Inverting input channel 1
3	IN1+	Non-inverting input channel 1
4	VCC+	Positive supply voltage
5	IN2+	Non-inverting input channel 2
6	IN2-	Inverting input channel 2
7	OUT2	Output channel 2
8	OUT3	Output channel 3
9	IN3-	Inverting input channel 3
10	IN3+	Non-inverting input channel 3
11	VCC-	Negative supply voltage
12	IN4+	Non-inverting input channel 4
13	IN4-	Inverting input channel 4
14	OUT4	Output channel 4

chanhvinh.com

2 Absolute maximum ratings

Table 4. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC} (1)	Supply voltage	6	V
V_{id}	Input voltage differential (V_{IN+} - V_{IN-})	$\pm V_{CC}$	V
V_{in} (2)	Input voltage	(V_{CC-}) - 0.2 to (V_{CC+}) + 0.2	V
I_{in}	Input current	±10	mA
T_{stg}	Storage temperature	-65 to +150	°C
R_{th-ja} (3)	Thermal resistance junction-to-ambient		°C/W
	SOT23-5	250	
	MiniSO8	190	
	TSSOP-14	100	
T_j	Maximum junction temperature	150	°C
ESD	HBM: human body model(4)	2	kV
	CDM: charged device model (5)	0.5	kV

1. *All voltage values are with respect to the VCC- pin, unless otherwise specified.*
2. *The maximum input voltage value may be extended to the condition that the input current is limited to ±10 mA.*
3. *R_{th-ja} is a typical value.*
4. *Human body model: HBM test according to the standard ESDA/JEDEC JS-001-2017.*
5. *Charged device model:the test CDM is done in according to the standard ESDA/JEDEC JS-002-2018.*

Table 5. Operating conditions

Symbol	Parameter	Value
V_{CC}	Supply voltage	2.5 to 5.5 V
V_{icm}	Common mode input voltage range (CMR)	V_{CC-} – 0.1 V to V_{CC+} + 0.1 V
T_{oper}	Operating free air temperature range	-40 °C to +125 °C

chanhvinh.com

3 Electrical characteristics

Table 6. Electrical characteristics at V_{CC} = 2.5 V to 5.5 V, V_{ICM} = V_{OUT} = V_{CC} / 2, T = 25 °C and OUT connected to V_{CC} / 2 through R_L=10 kΩ (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
DC performance						
V_{io}	Input offset voltage	T = 25 °C			± 4.5	mV
		-40 °C ≤ T ≤ 125 °C			± 7.5	
DV_{io}/DT	Input offset voltage temperature drift	-40 °C ≤ T ≤ 125 °C		±5		µV/°C
I_{ib}	Input bias current			±1		pA
I_{io}	Input offset current			±1		pA
A_{VD}	Open loop gain	V_{CC-}+500 mV ≤ V_{OUT} ≤ V_{CC+}-500 mV	80	89		dB
CMR	Common-mode rejection ratio 20.log ($\Delta V_{io}/\Delta V_{icm}$)	V_{CC-}≤ V_{icm} ≤ V_{CC+}	58	78		dB
V_{OH}	High level output voltage drop (V_{OH}=V_{CC+}-V_{OUT})				40	mV
V_{OL}	Low level output voltage drop (V_{OL}=V_{OUT})				40	mV
I_{OUT}	Short-circuit	V_{CC} = 5 V		±30		mA
I_{CC}	Supply current (by operational amplifier)	No load		750	1400	µA
AC performance						
GBP	Gain bandwidth product	R_L = 2 kΩ, C_L = 100 pF, f = 100 kHz		6		MHz
SR	Slew rate	A_V=1 V/V, 10% to 90%		4.5		V/µs
Φm	Phase margin	R_L = 2 kΩ, C_L = 100 pF		45		Degrees
en	Input voltage noise density	f = 10 kHz		21		nV/√Hz

chanhvinh.com

4 Typical performance characteristics

Figure 4. Input offset voltage vs. common mode voltage

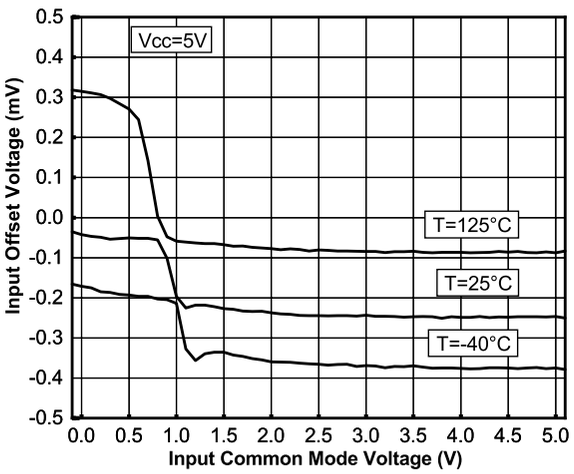


Figure 5. Positive slew rate vs. supply voltage

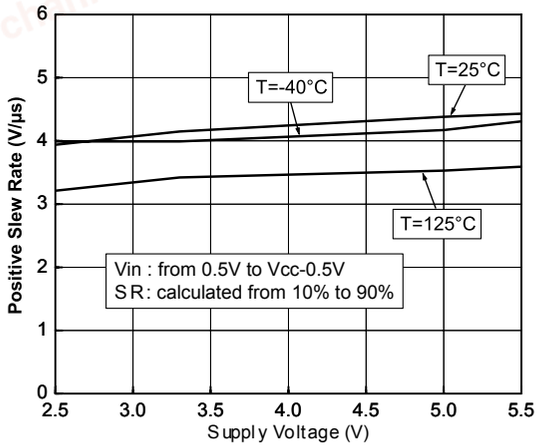


Figure 6. Negative slew rate vs. supply voltage


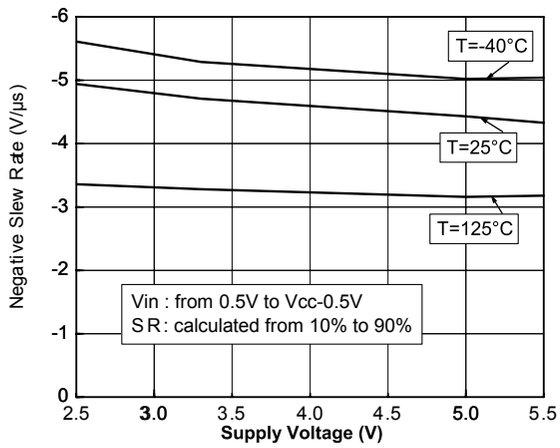


Figure 7. Input equivalent noise vs. frequency

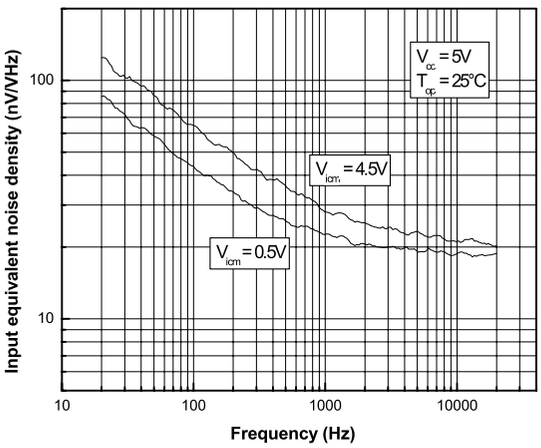

chanhvinh.com

Figure 8. Output current vs. output voltage

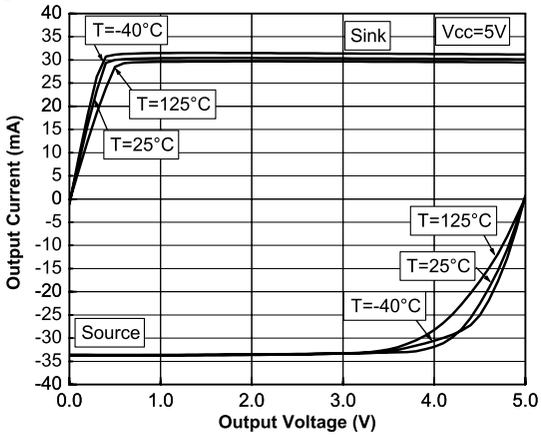


Figure 9. Supply current vs. input common voltage

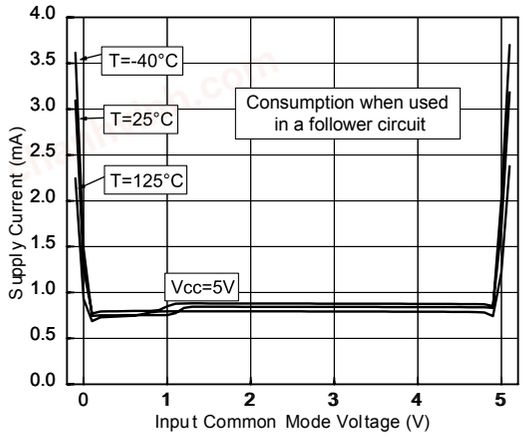


Figure 10. Supply current vs. input common mode voltage


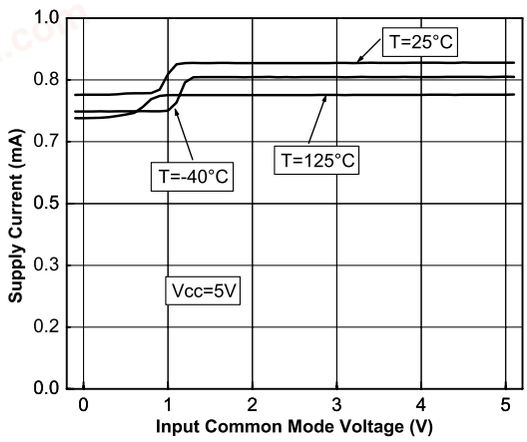


Figure 11. Bode diagram

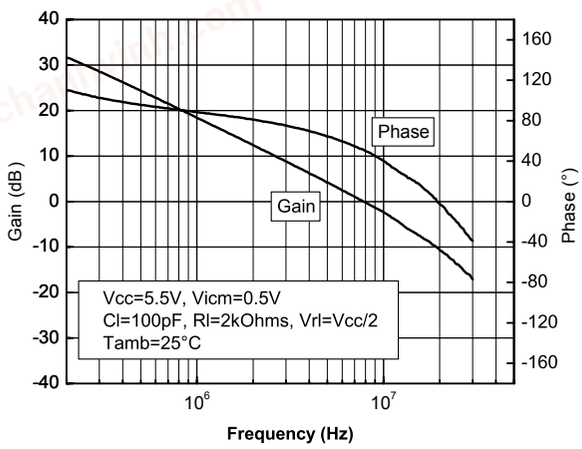

chanhvinh.com

5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

5.1 SOT23-5 package information

Figure 12. SOT23-5 package outline

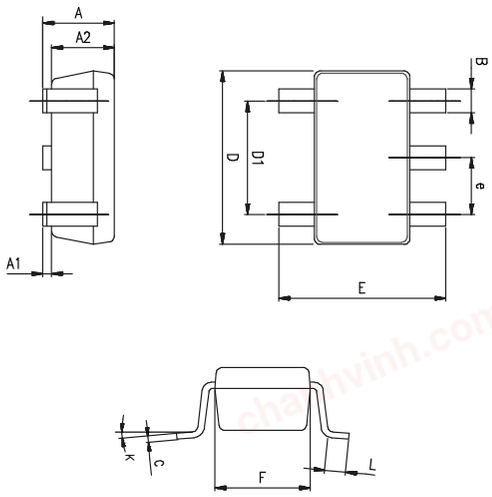


Table 7. SOT23-5 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	1.20	1.45	0.035	0.047	0.057
A1			0.15			0.006
A2	0.90	1.05	1.30	0.035	0.041	0.051
B	0.35	0.40	0.50	0.014	0.016	0.020
C	0.09	0.15	0.20	0.004	0.006	0.020
D	2.80	2.90	3.00	0.110	0.114	0.118
D1		1.90			0.075	
e		0.95			0.037	
E	2.60	2.80	3.00	0.102	0.110	0.118
F	1.50	1.60	1.75	0.059	0.063	0.069
L	0.10	0.35	0.60	0.004	0.014	0.024
K	0°		10°	0°		10°

chanhvinh.com

5.2 MiniSO8 package information

Figure 13. **MiniSO8 package outline**

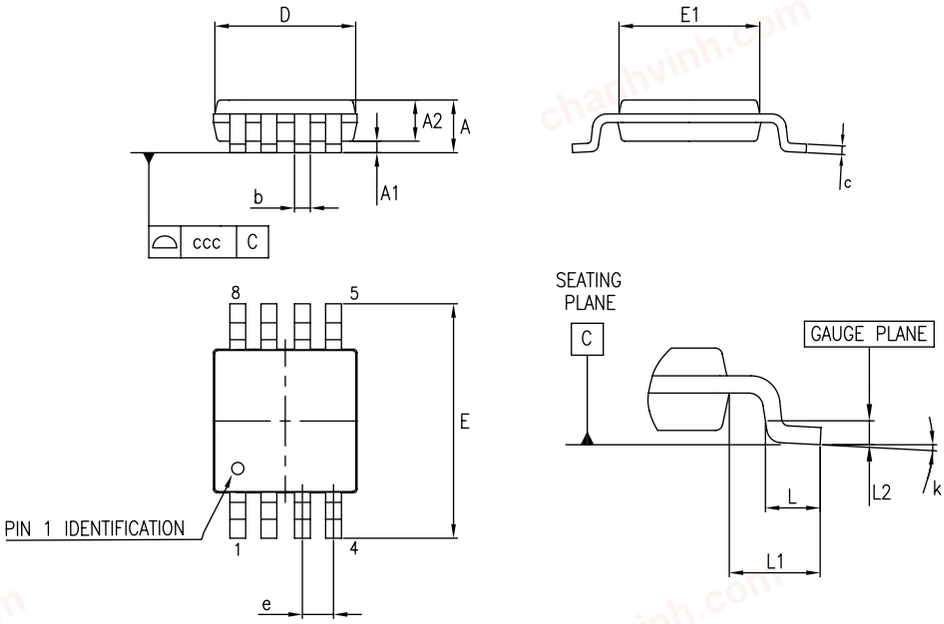


Table 8. **MiniSO8 mechanical data**

Dim.	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.1			0.043
A1	0		0.15	0		0.006
A2	0.75	0.85	0.95	0.03	0.033	0.037
b	0.22		0.4	0.009		0.016
c	0.08		0.23	0.003		0.009
D	2.8	3	3.2	0.11	0.118	0.126
E	4.65	4.9	5.15	0.183	0.193	0.203
E1	2.8	3	3.1	0.11	0.118	0.122
e		0.65			0.026	
L	0.4	0.6	0.8	0.016	0.024	0.031
L1		0.95			0.037	
L2		0.25			0.01	
k	0°		8°	0°		8°
ccc			0.1			0.004

chanhvinh.com

5.3 TSSOP-14 package information

Figure 14. **TSSOP-14 package outline**

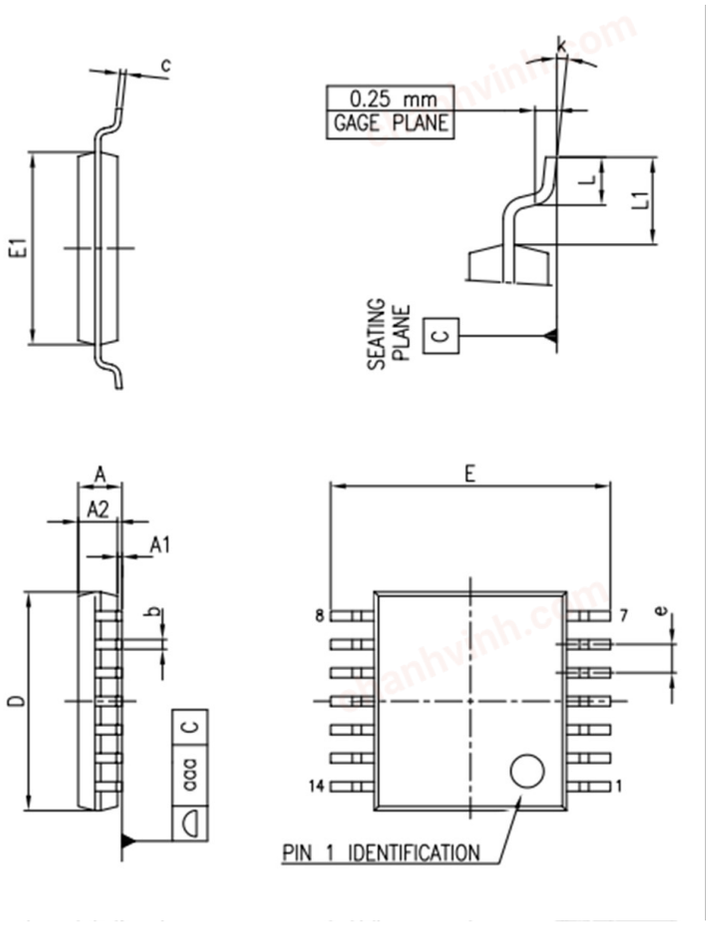


Table 9. **TSSOP-14 mechanical data**

Dim.	mm		
	Min.	Typ.	Max.
A			1.20
A1	0.05		0.15
A2	0.80	1.00	1.05
b	0.19		0.30
c	0.09		0.20
D	4.90	5.00	5.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e		0.65 BSC	
L	0.45	0.60	0.75
L1		1.00	
k	0		8
aaa			0.10

chanhvinh.com

6 Ordering information

Table 10. **Order code**

Order code	Temperature range	Package	Marking
TSL6201ILT	-40 °C to 125 °C	SOT23-5	KD
TSL6202IST		MiniSO8	KE
TSL6204IPT		TSSOP-14	6204I

chanhvinh.com

Revision history

Table 11. **Document revision history**

Date	Version	Changes
01-Dec-2021	1	Initial release.

chanhvinh.com

Contents

1 **Pin description** 2
1.1 TSL6201 single operational amplifier 2
1.2 TSL6202 dual operational amplifier 3
1.3 TSL6204 quad operational amplifier 4
2 **Absolute maximum ratings** 5
3 **Electrical characteristics** 6
4 **Typical performance characteristics** 7
5 **Package information** 9
5.1 [Package name] package information 9
5.2 MiniSO8 package information 10
5.3 TSSOP-14 package information 11
6 **Ordering information** 12
Revision history 13

chanhvinh.com

List of tables

Table 1. SOT23-5 pin description . . . 2
Table 2. MiniSO8 pin description . . . 3
Table 3. TSSOP-14 pin description . . . 4
Table 4. Absolute maximum ratings . . . 5
Table 5. Operating conditions . . . 5
Table 6. Electrical characteristics at V_{CC} = 2.5 V to 5.5 V, V_{ICM} = V_{OUT} = V_{CC} / 2, T = 25 °C and OUT connected to V_{CC} / 2 through R_L=10 kΩ (unless otherwise specified) . . . 6
Table 7. SOT23-5 package mechanical data . . . 9
Table 8. MiniSO8 mechanical data . . . 10
Table 9. TSSOP-14 mechanical data . . . 11
Table 10. Order code . . . 12
Table 11. Document revision history . . . 13

chanhvinh.com

List of figures

Figure 1. SOT23-5 pin connections (top view) . . . 2
Figure 2. MiniSO8 pin connection (top view) . . . 3
Figure 3. TSSOP-14 pin connections (top view) . . . 4
Figure 4. Input offset voltage vs. common mode voltage . . . 7
Figure 5. Positive slew rate vs. supply voltage . . . 7
Figure 6. Negative slew rate vs. supply voltage . . . 7
Figure 7. Input equivalent noise vs. frequency . . . 7
Figure 8. Output current vs. output voltage . . . 8
Figure 9. Supply current vs. input common voltage . . . 8
Figure 10. Supply current vs. input common mode voltage . . . 8
Figure 11. Bode diagram . . . 8
Figure 12. SOT23-5 package outline . . . 9
Figure 13. MiniSO8 package outline . . . 10
Figure 14. TSSOP-14 package outline . . . 11

chanhvinh.com

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved