
chanhvinh.com

TAOGLAS®

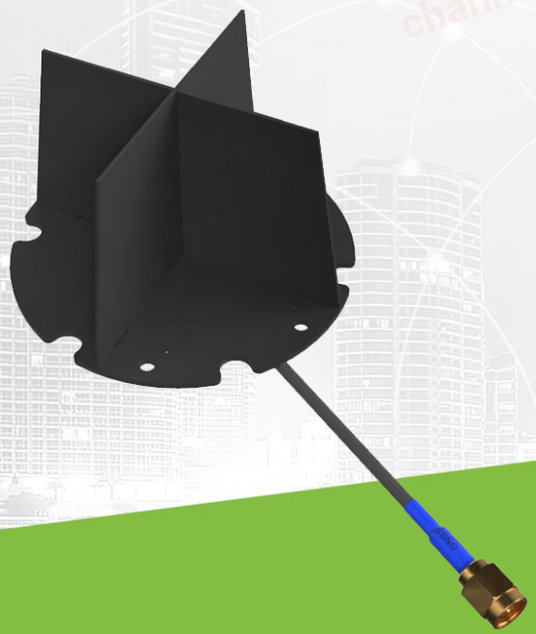

Datasheet

Part No:
EAHP.60.01.0100D

Description

Embedded Active Lightweight Antenna for GNSS L1/L2/L5/L6 and L-Band

Features:

Embedded Active Antenna
Covering: L1/L2/L5 + L-Band
Dims: Ø75 x 44mm
Cable:100mm of RG174
Connector: SMA(M) ST connector
RoHS & Reach Compliant

chanhvinh.com

1.	Introduction	3
2.	Specification	4
3.	Mechanical Drawing	7
4.	Packaging	8
5.	Antenna Characteristics	9
6.	Radiation Patterns	16
7.	LNA Characteristics	24
	Changelog	27

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

chanhvinh.com

1. Introduction



The Taoglas EAHP.60 is a lightweight, embedded active multi-band GNSS antenna that has been carefully designed for high performance cm-level positional accuracy covering the full GNSS spectrum for maximum compatibility. Bands covered include GPS/QZSS L1/L2/L5/L6, GLONASS G1/G2/G3, Galileo E1/E5a/E5b/E6, BeiDou B1/B2a/B2b/B3, L-Band, QZSS L6, NAVIC L5, as well as SBAS (WAAS/EGNOS/GAGAN/SDCM/SNAS. This allows the user to use all constellations and bands to achieve higher location accuracy, as well as stability of position tracking in urban environments when used in their device.

The EAHP.60 has excellent performance across the full bandwidth of the antenna and its design has exhibits even gain across the hemisphere giving almost excellent, broad axial ratio. This makes the antenna resilient to interference and multipath rejection and provides excellent phase centre stability. The LNA used in the EAHP.60 ensures excellent out of band rejection and provides excellent positioning stability and reliability of GNSS signals.

Typical applications for the EAHP.60 include:

- Autonomous Driving, Precision Positioning for Robotics
- Precision Agriculture
- Inventory Management & Container tracking
- Telematics & Asset Tracking
- Timing Accuracy Synchronization

The EAHP.60 is lightweight and compact and can be mechanically integrated into a device using screws with the mounting holes through the PCB. The standard product is supplied with 100mm of RG-174 cable with an SMA(M) connector but can be fully customized for your application.

The EAHP.60 is the latest addition to an ongoing product road map of high precision antennas by Taoglas that allows you to achieve genuine cm-level accuracy for your application.


For samples, or more information how to integrate the EAHP.60 into your device, please contact your regional Taoglas customer support team.

chanhvinh.com

TAOGLAS

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
L-Band	L-Band 1542 MHz				
	■				
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■

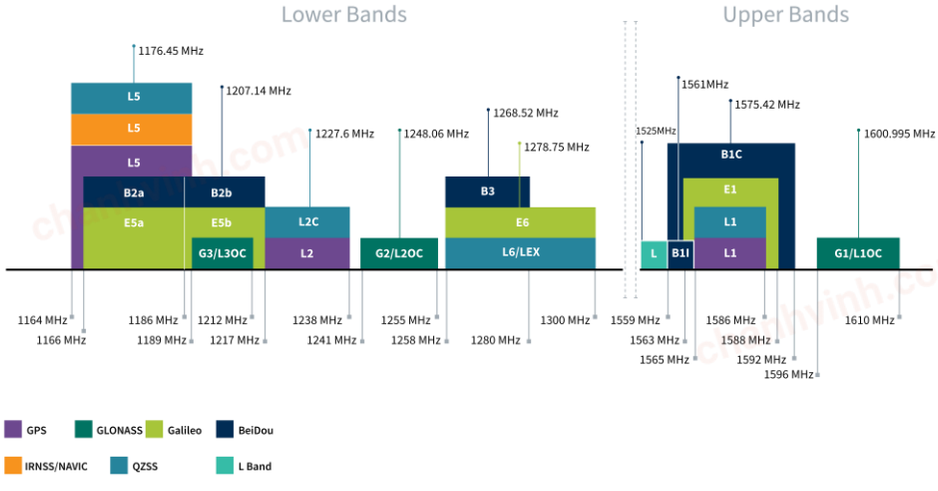

GNSS Bands and Constellations

chanhvinh.com

GNSS Electrical									
Frequency (MHz)	**1176.45**	**1207**	**1227.6**	**1248**	**1278.75**	**1542**	**1561**	**1575.42**	**1603**
VSWR (max.)	1.2:1	1.1:1	1.1:1	1.5:1	1.4:1	1.4:1	1.5:1	1.3:1	1.4:1
Passive Antenna Efficiency (%)	65.84	66.6	72.85	75.74	67.42	60.04	55.58	52.95	47.65
Passive Antenna Gain at Zenith (dBi)	6.67	6.24	6.76	6.76	6.27	4.74	3.74	3.74	2.57
Axial Ratio (dB)	2.94	3.08	1.7	0.89	0.66	1.84	1.63	1.51	1.27
PCO_x (cm)	0.05	0.49	0.49	0.45	0.45	0.22	0.23	0.2	0.15
PCO_y (cm)	-1.68	-1.34	-1.14	-1.27	-1.33	-1.16	-1.24	-1.27	-1.28
PCV (cm)	0.5	0.6	0.6	0.6	0.5	0.1	0.1	0.1	0.1
Group Delay Mean (ns)	9.65	10.69	10.89	12.47	12.17	11.23	11.3	10.85	10.8
Polarization	RHCP								
Impedance	50 Ω								
Tested on a 30x30cm Ground Plane									

LNA and Filter Electrical Properties									
Frequency (MHz)	**1176.45**	**1207**	**1227.6**	**1248**	**1278**	**1542**	**1561**	**1575.42**	**1603**
Gain (dB)	27.3	25.3	25.9	25.3	25.0	27.1	27.2	26.2	26.2
Noise (dB)	3.7	3.1	4.8	3.9	4	3.8	4.2	4.3	3.8
Voltage In	1.8V~5.5V								
ESD	±20KV for Contact and ±25KV for Air								
Out Of Band Rejection	70dB for frequencies <1GHz 60dB for frequencies <1.7GHz								
Power Consumption (mA)	18 ± 3								
LTE Band 13 interference filter circuit INCLUDED									


chanhvinh.com


Mechanical	
Dimensions	Ø75 x 44mm
Weight	75g
Connector	SMA(M) ST
Cable	RG-174


Environmental	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	Non-condensing 65°C 95% RH

chanhvinh.com


3. Mechanical Drawing

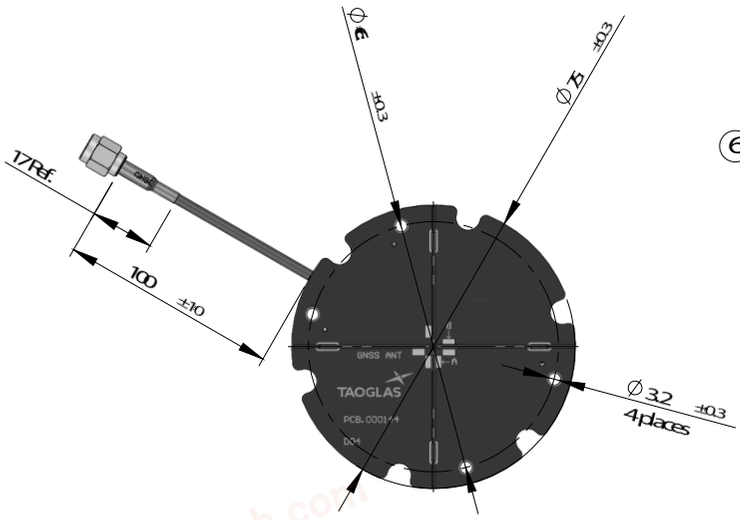

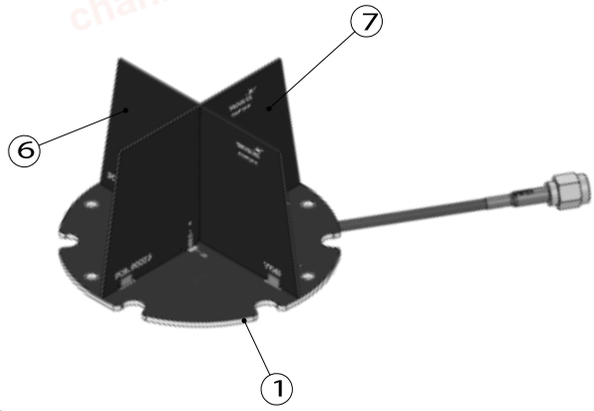

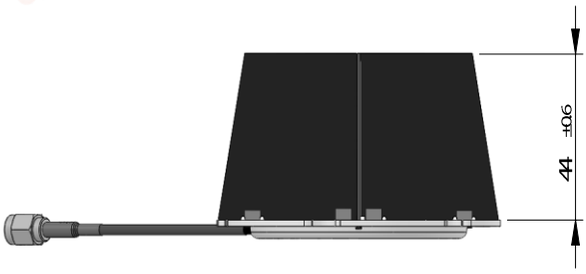

	Name	Material	Finish	Qty
1	PCB_XAHP/EAHP.60			1
2	Shielding case	SPTE 0.2t	Tin Plated	1
3	RG-174 cable	PVC	Black	1
4	Heat Shrink Tube(GNSS)	PE	Blue Tube/White Text	1
5	SMA(M) ST Plug_for RG-316/RG-174	Brass	Au Plated	1
6	XAHP.60-A	FR4 0.8t	Black	1
7	XAHP.60-B	FR4 0.8t	Black	1

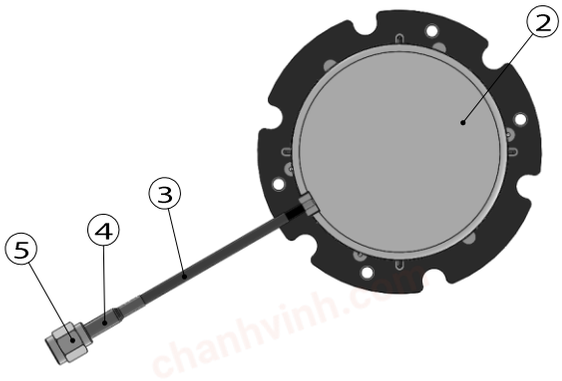


chanhvinh.com

4. Packaging

1 pcs per static bag
Bag dimensions: 180x250mm
Weight: 0.35kg




36pcs per carton
Carton Dimensions: 370x370x300mm
Weight: 2.5kg

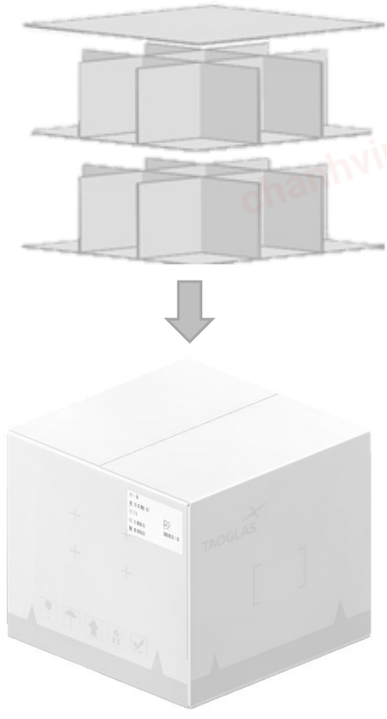

chanhvinh.com

5. Antenna Characteristics

5.1 Test Setup

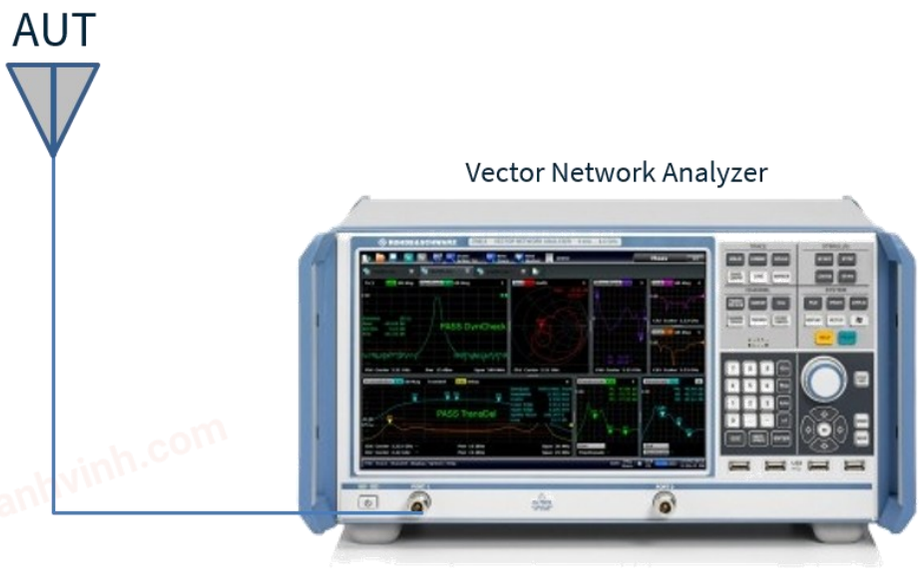





VNA Test Set-up on a 30x30cm Ground Plane

chanhvinh.com

5.2 Return Loss

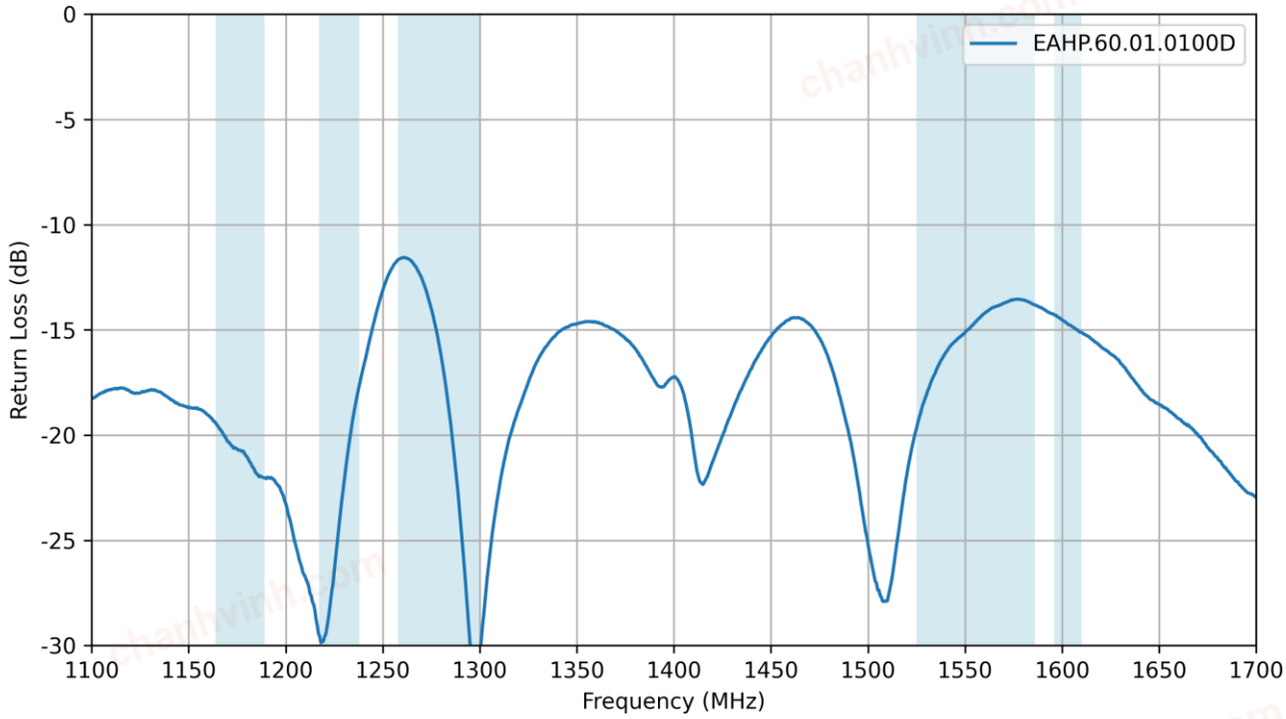


5.3 VSWR

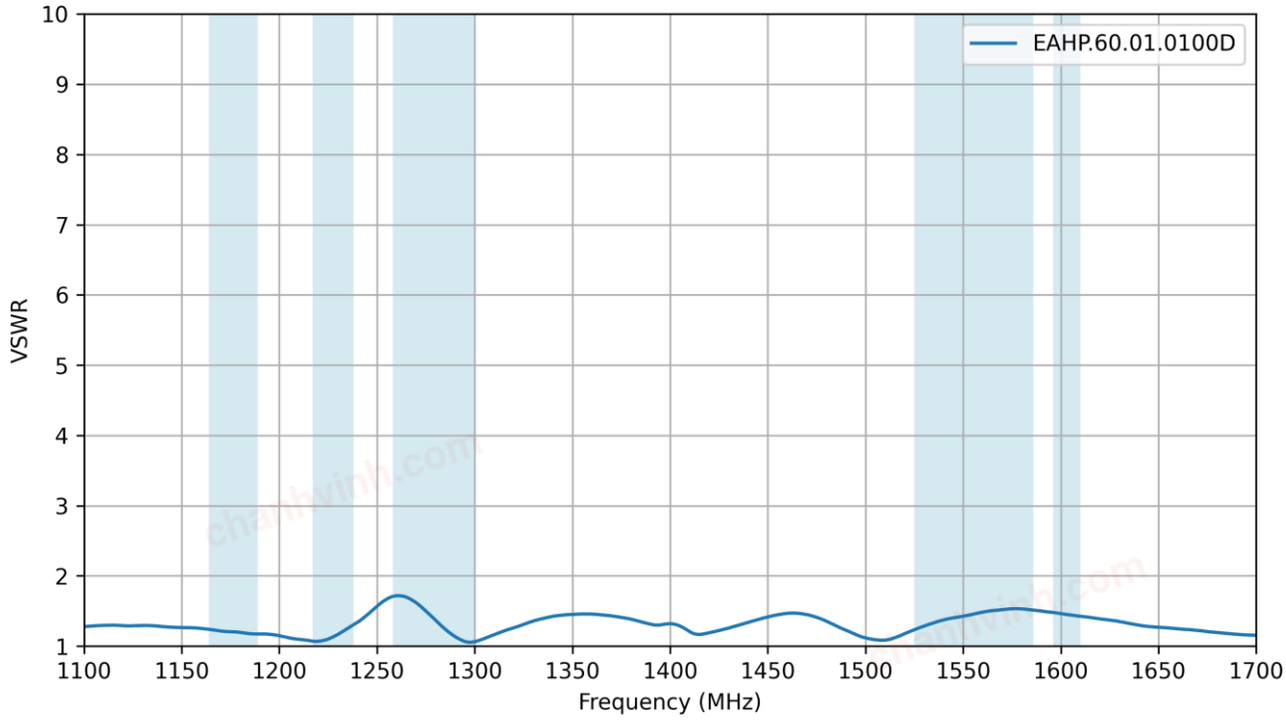


chanhvinh.com

5.4 Efficiency

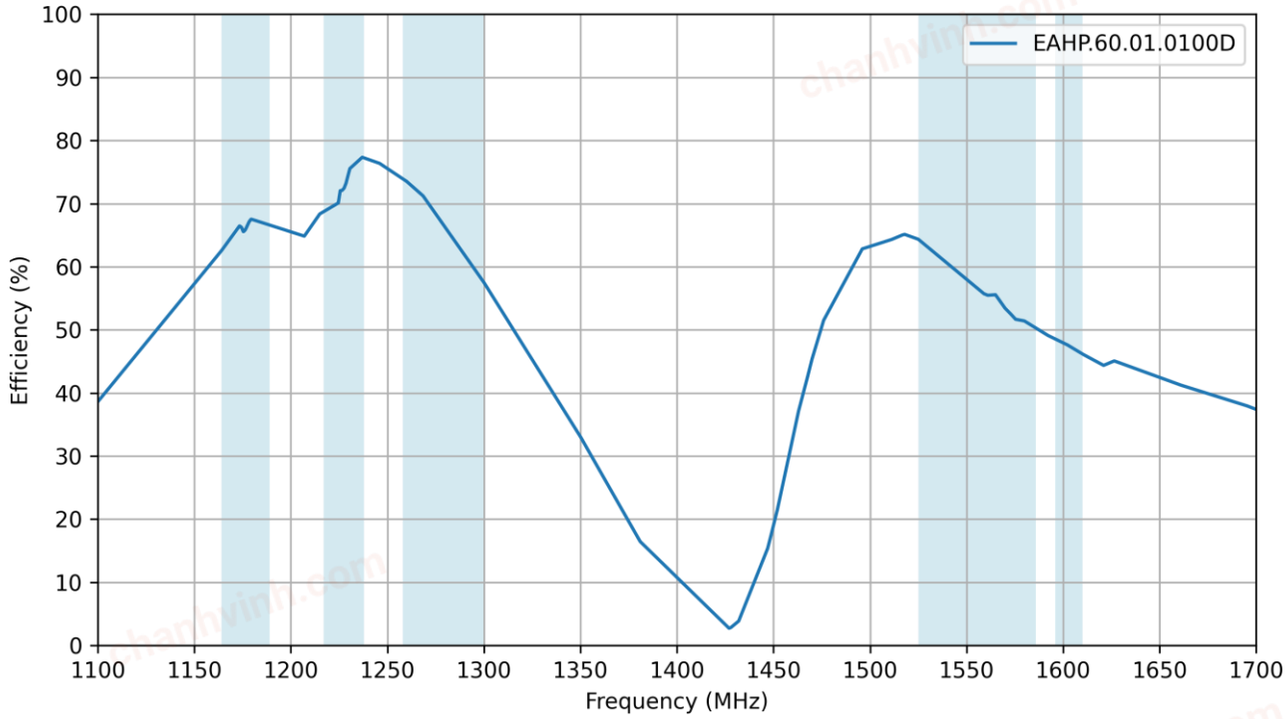


5.5 Average Gain

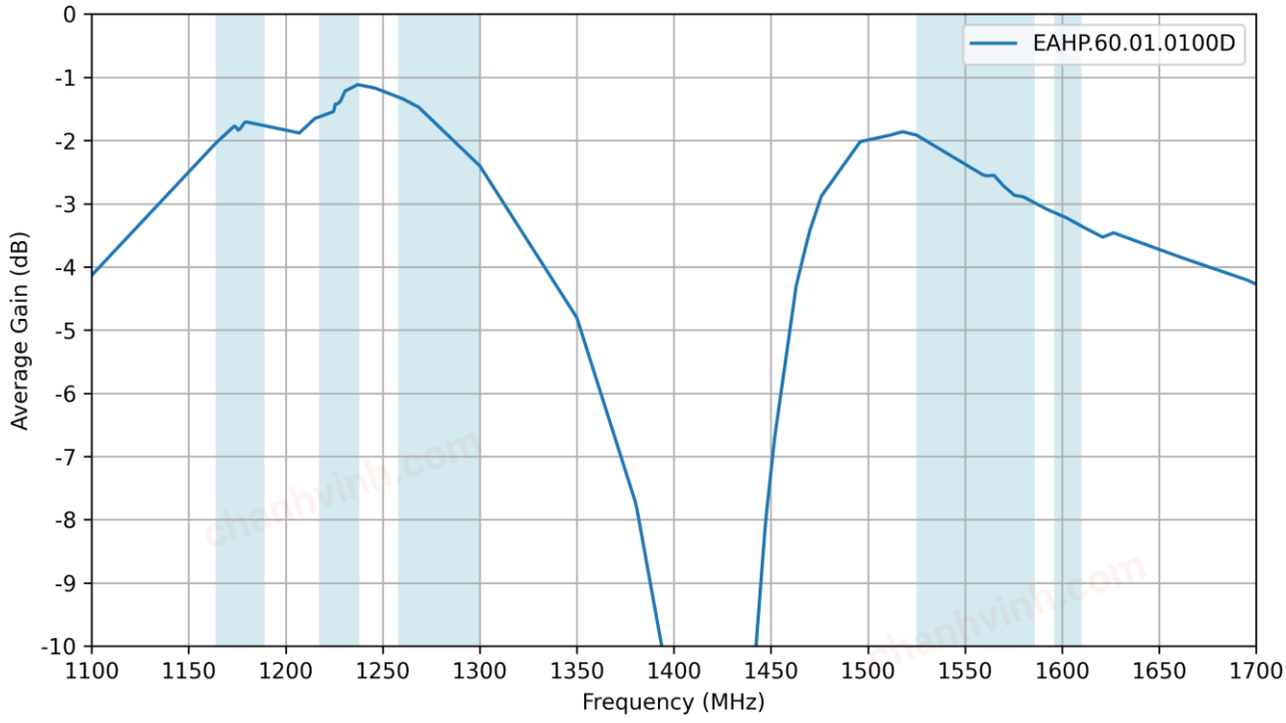


chanhvinh.com

5.6 Peak Gain

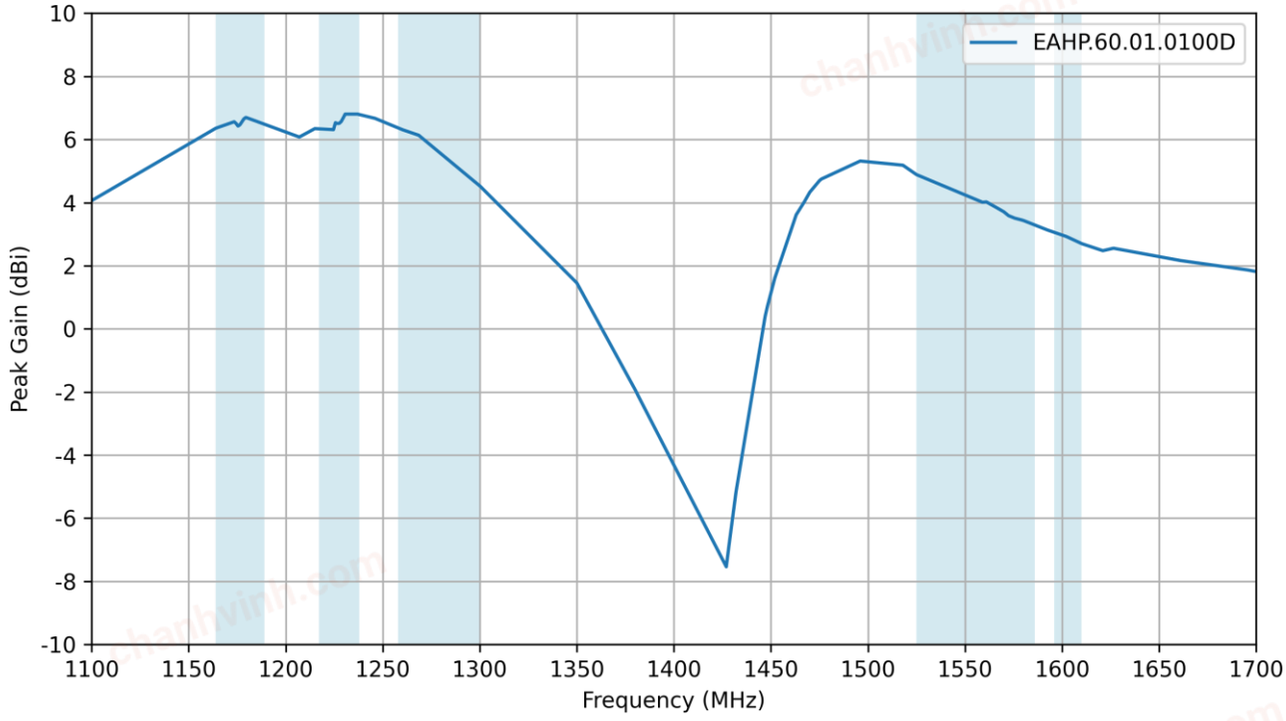


5.7 Axial Ratio

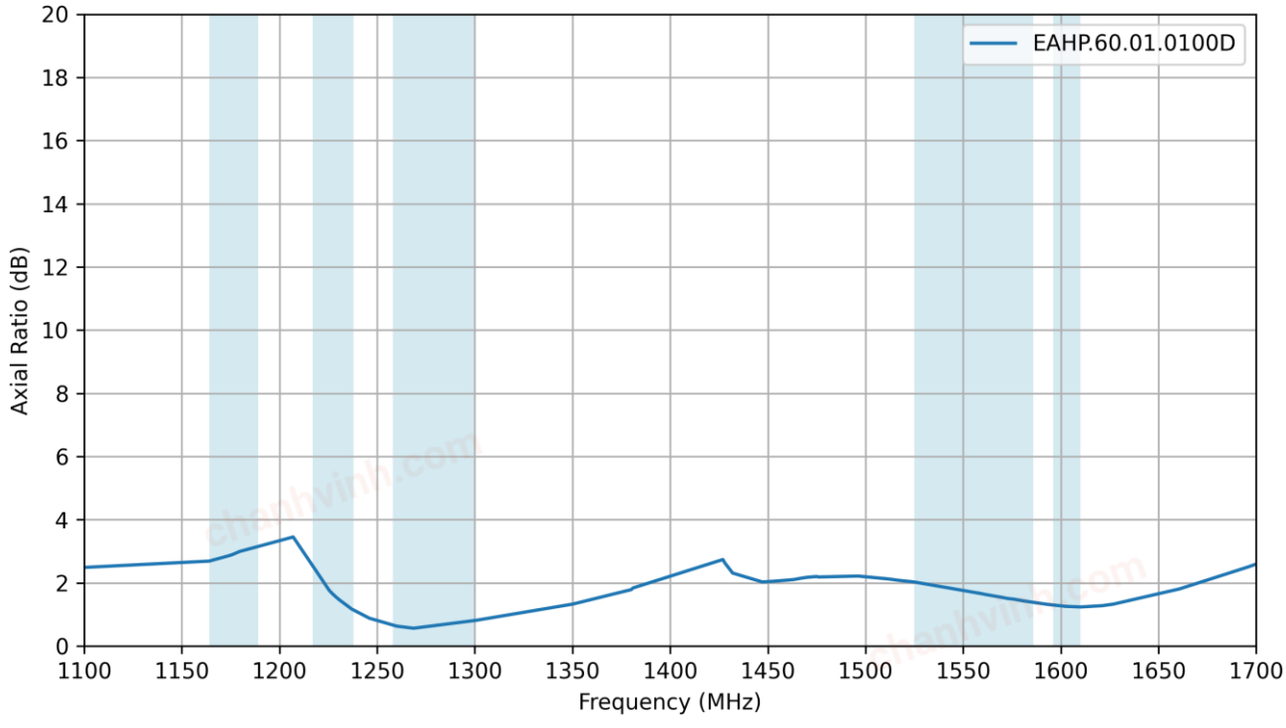


chanhvinh.com

5.8 AR vs Angle for Phi=0

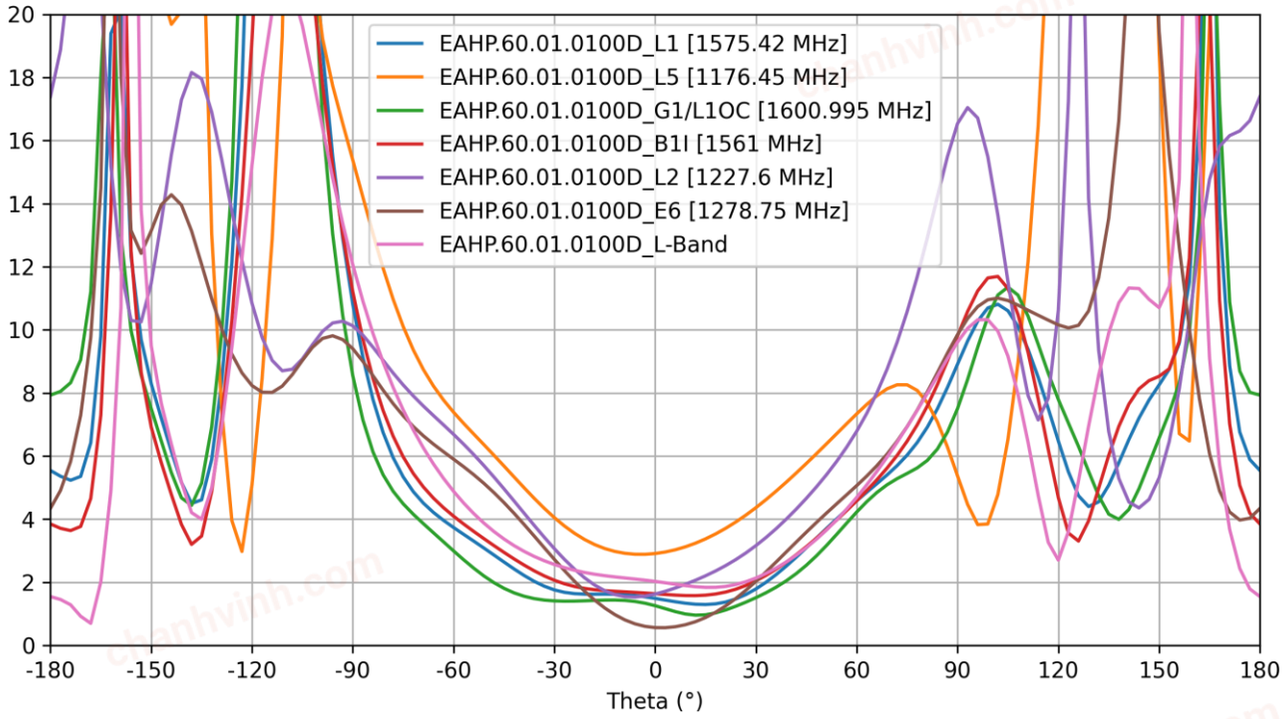


5.9 AR vs Angle for Phi=90

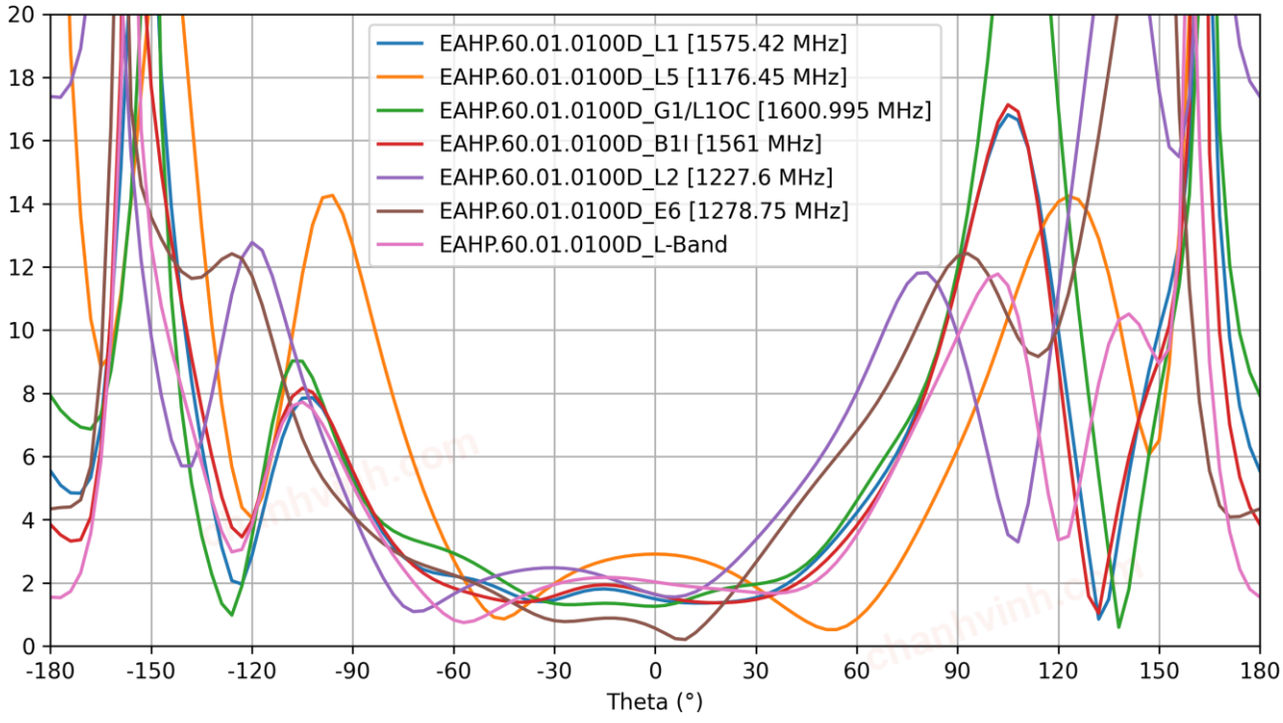


chanhvinh.com

5.10 AR vs Angle for Theta=90

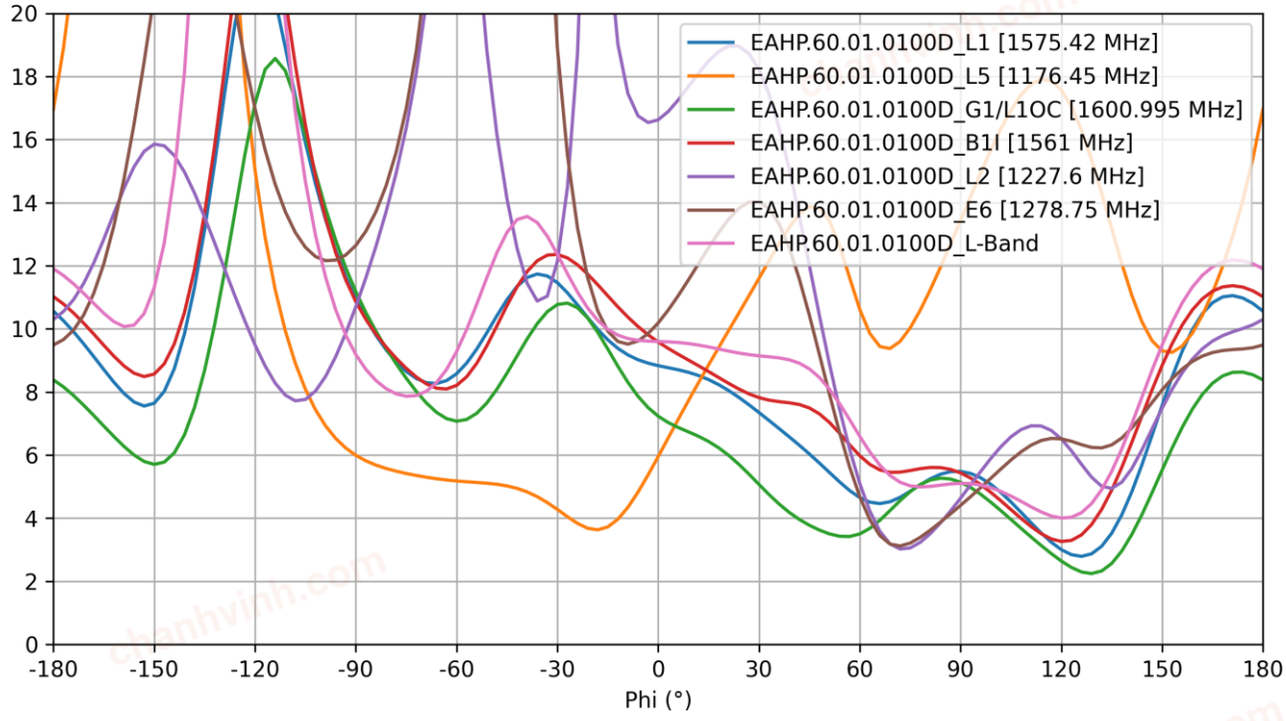


5.11 PCO

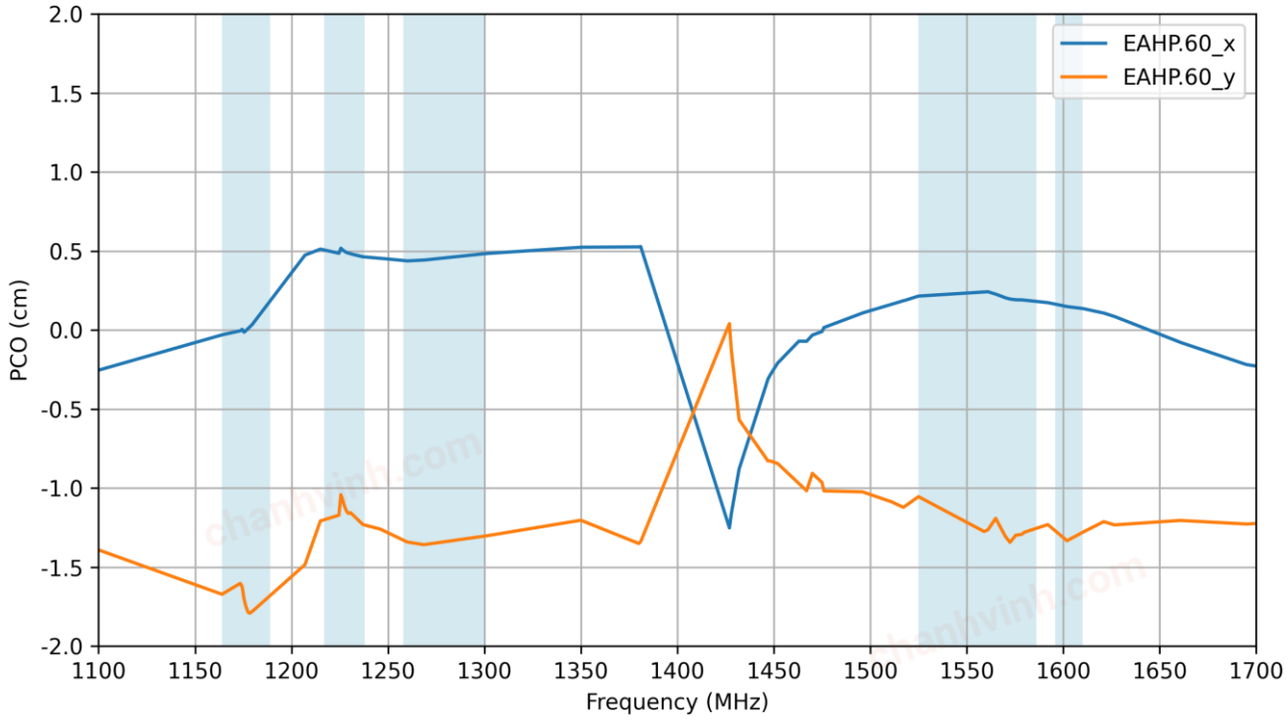

chanhvinh.com


5.12 PCV

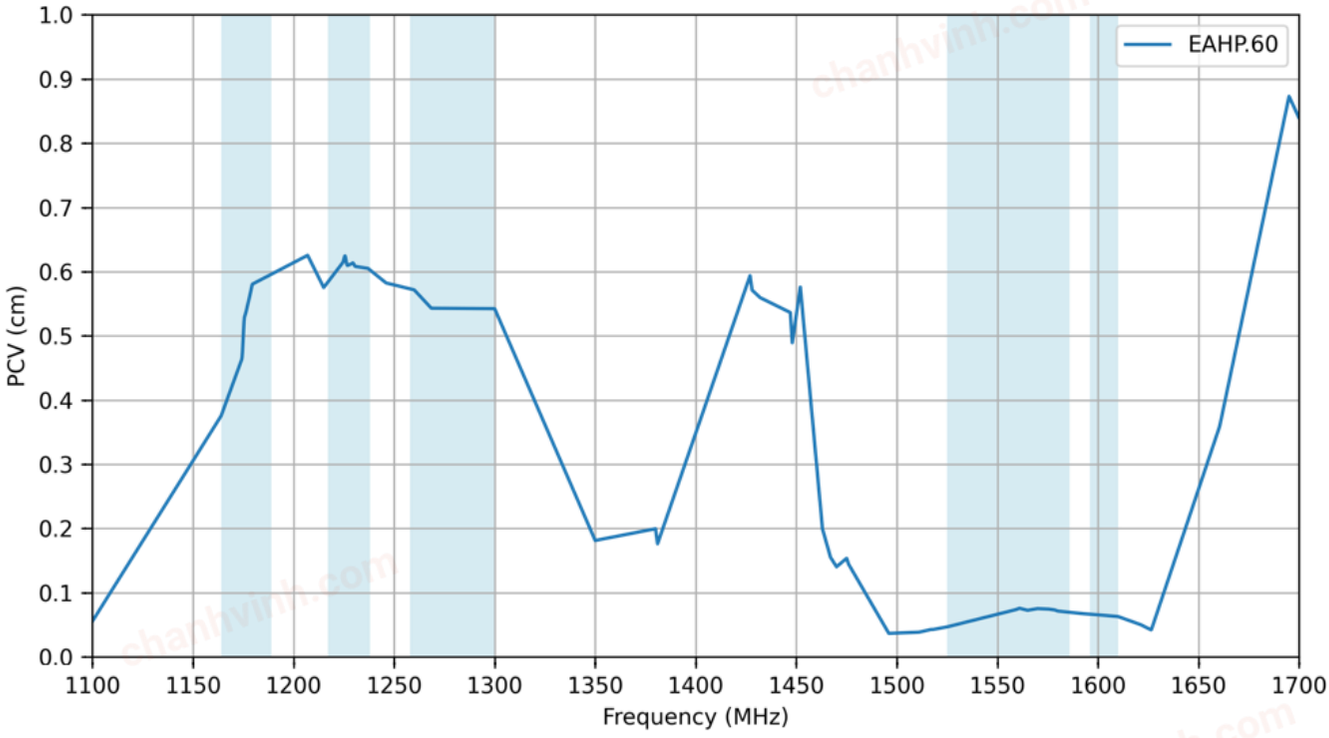


chanhvinh.com

6. Radiation Patterns

6.1 Test Setup

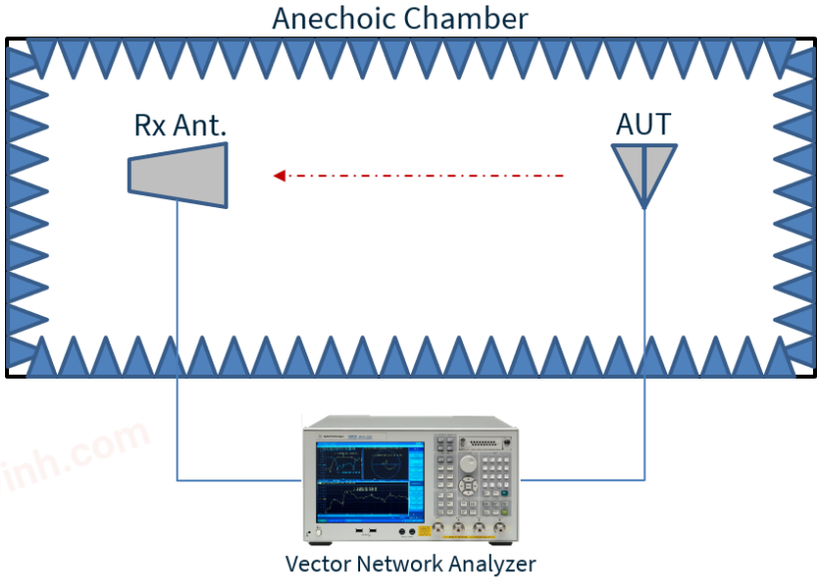


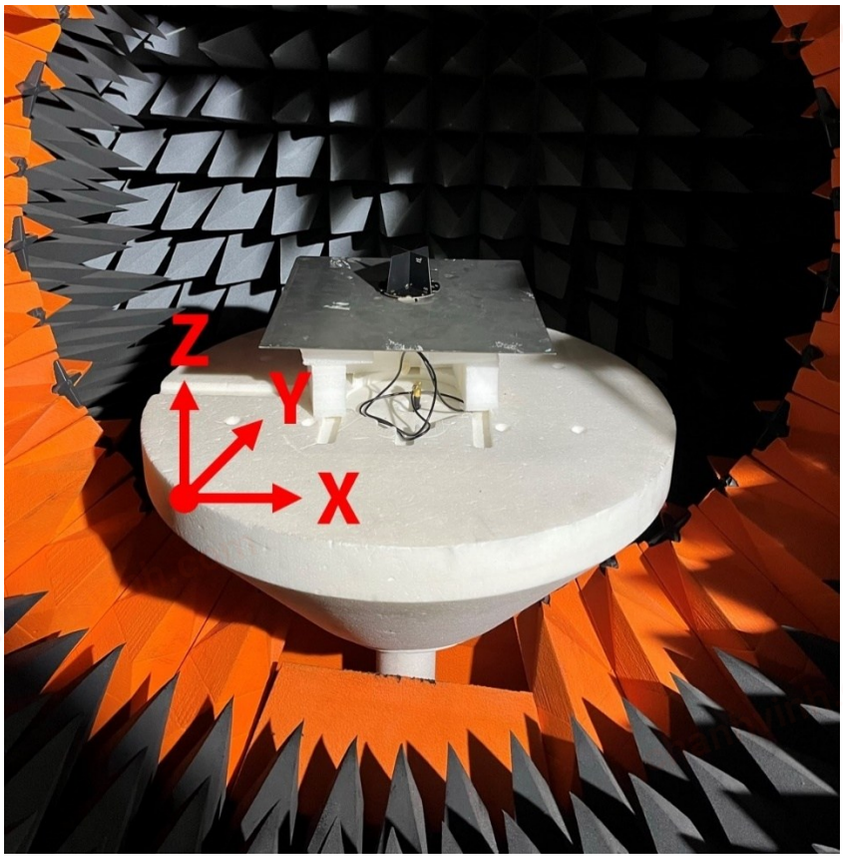


Chamber Test Set-up on a 30x30cm Ground Plane


chanhvinh.com


6.2 Patterns at 1176 MHz

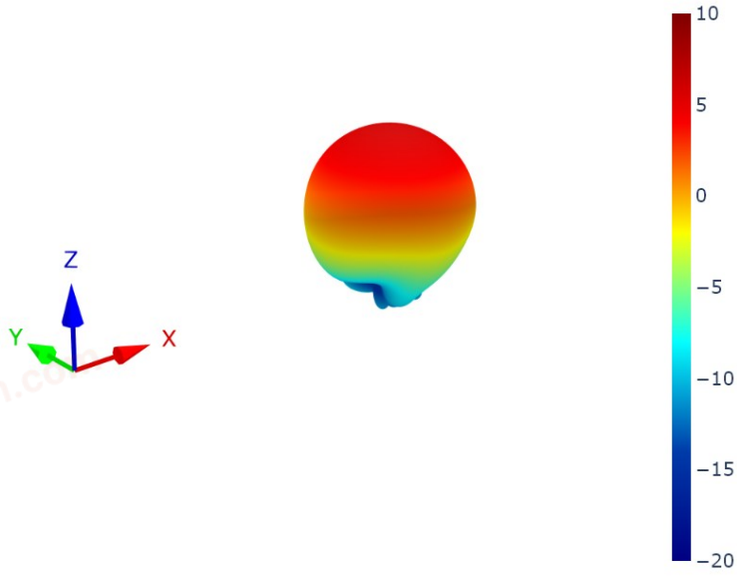

XZ Plane	YZ Plane	XY Plane

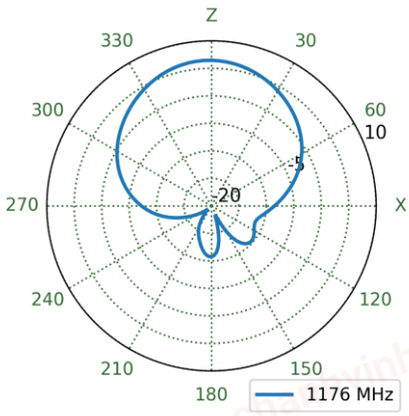


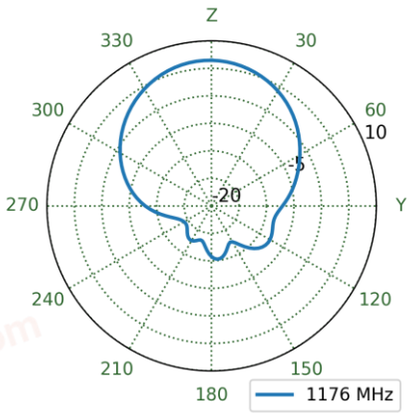

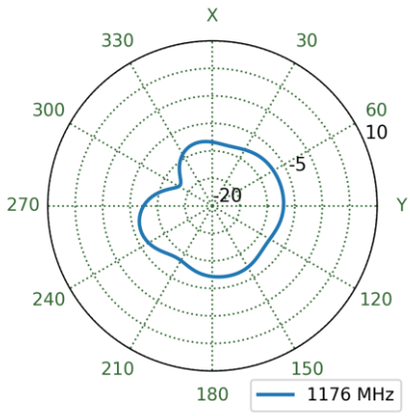



chanhvinh.com


6.3 Patterns at 1228 MHz

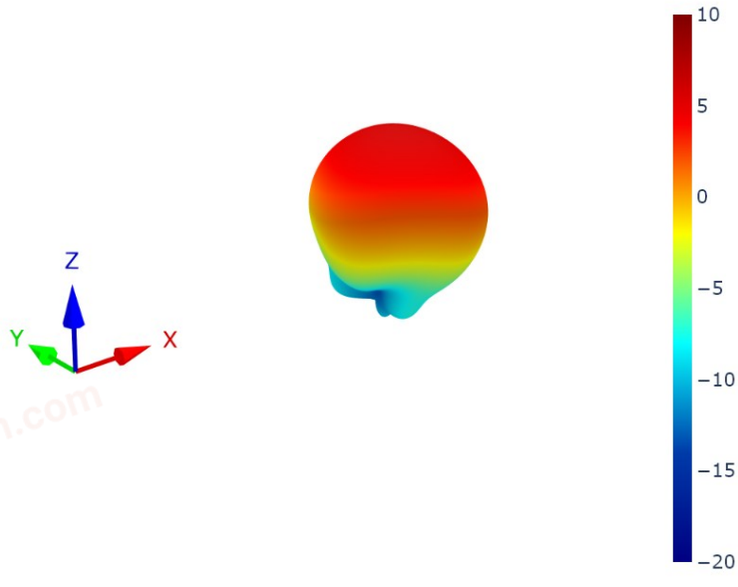

XZ Plane	YZ Plane	XY Plane

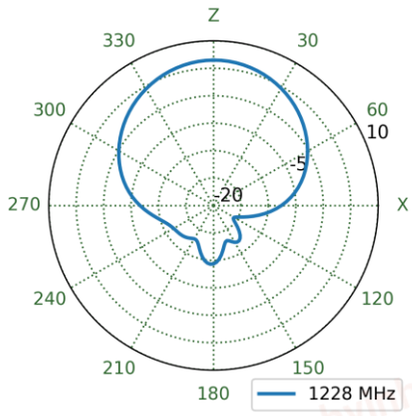


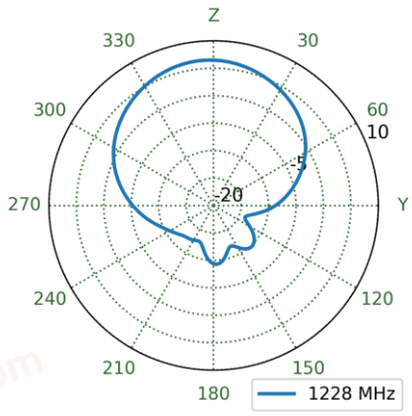

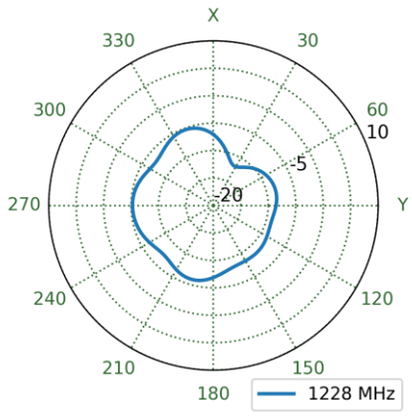



chanhvinh.com


6.4 Patterns at 1278 MHz

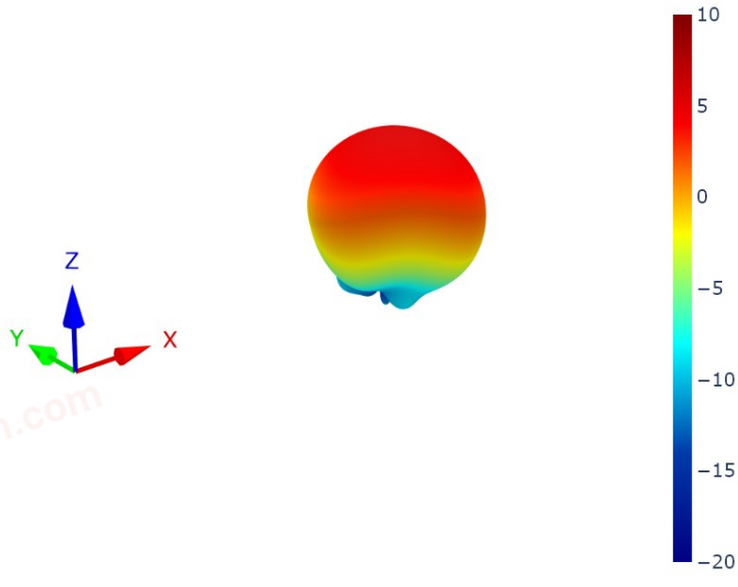

XZ Plane	YZ Plane	XY Plane

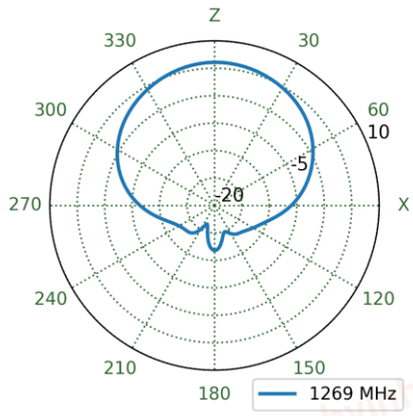


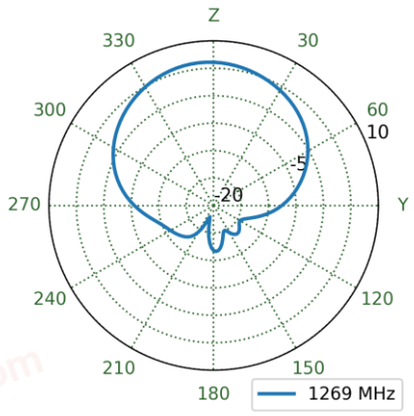

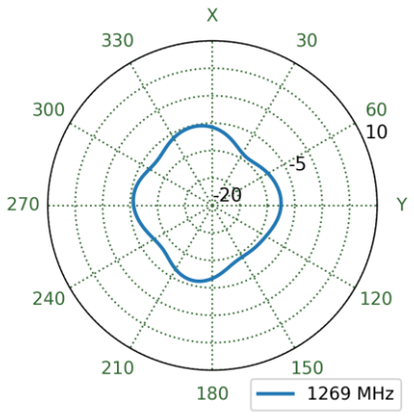



chanhvinh.com


6.5 Patterns at 1542 MHz

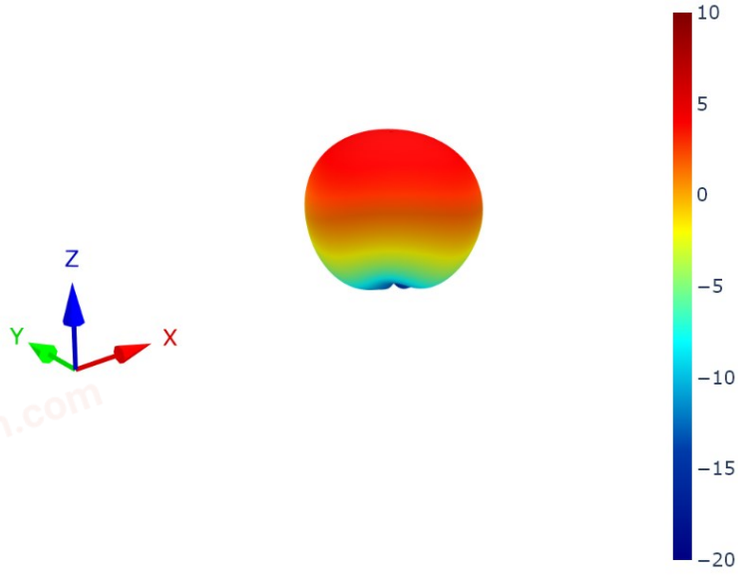

XZ Plane	YZ Plane	XY Plane

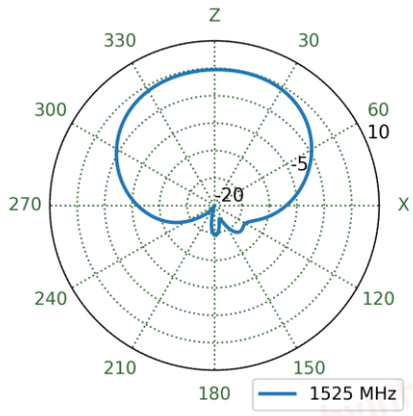


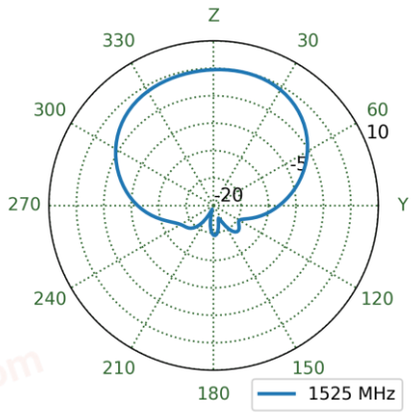

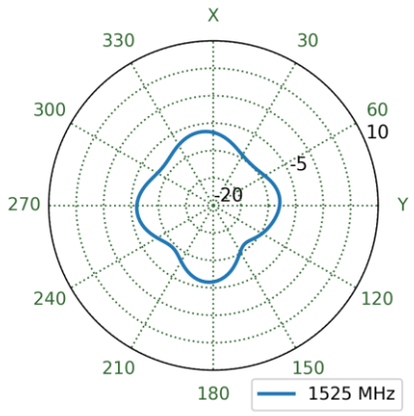



chanhvinh.com


6.6 Patterns at 1561 MHz

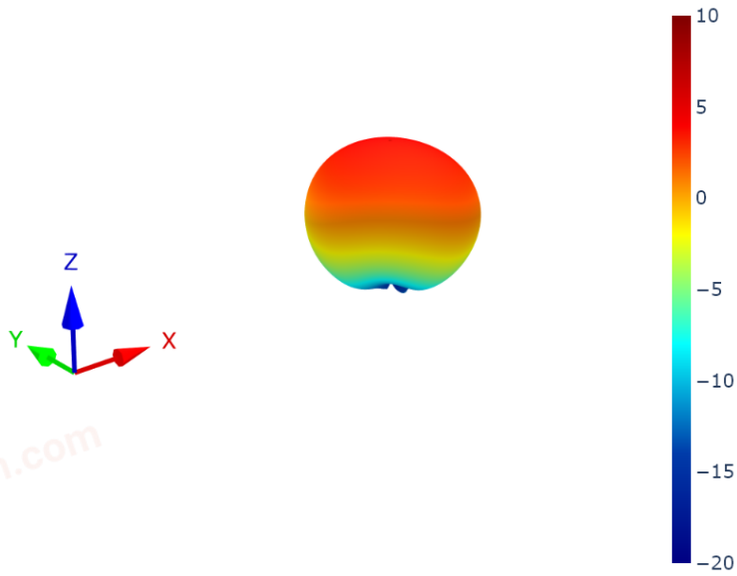

XZ Plane	YZ Plane	XY Plane

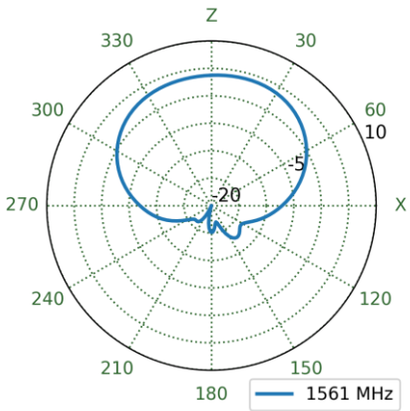


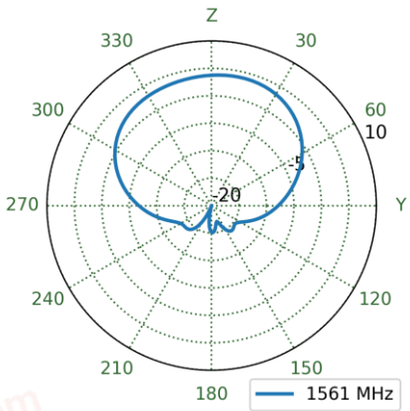

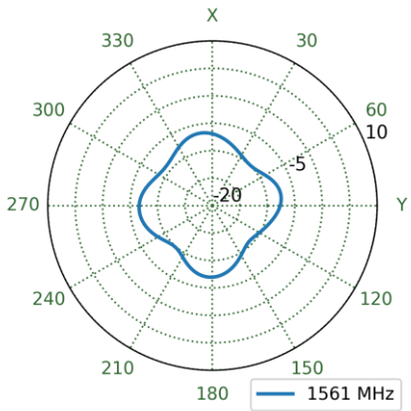



chanhvinh.com


6.7 Patterns at 1576 MHz

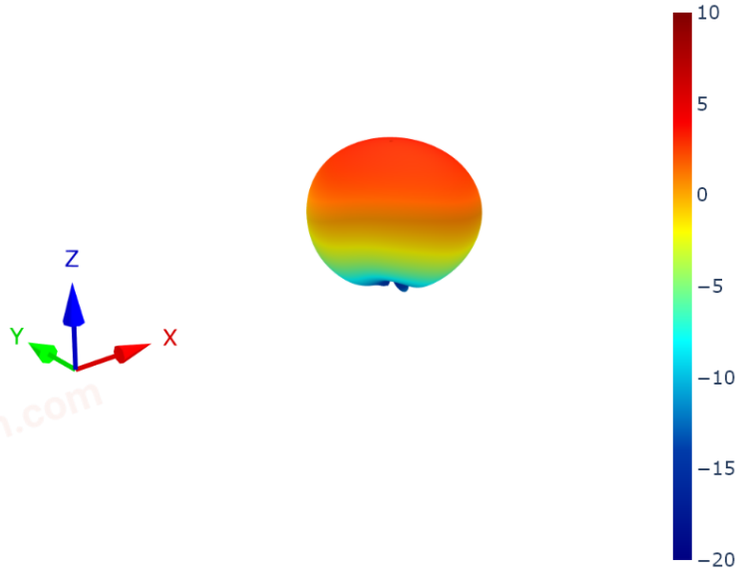

XZ Plane	YZ Plane	XY Plane

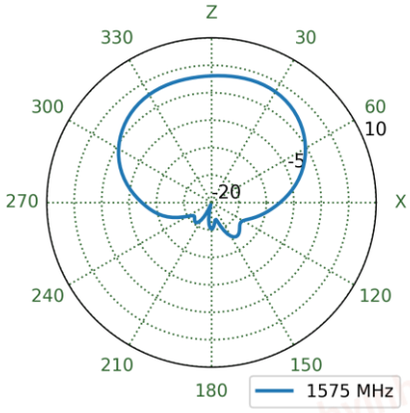


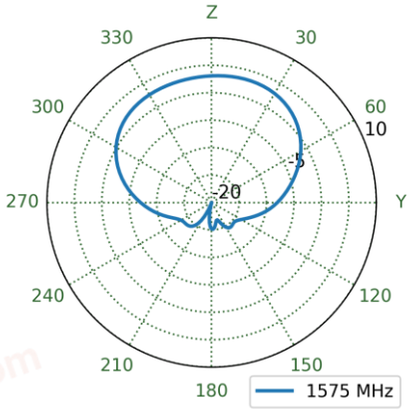

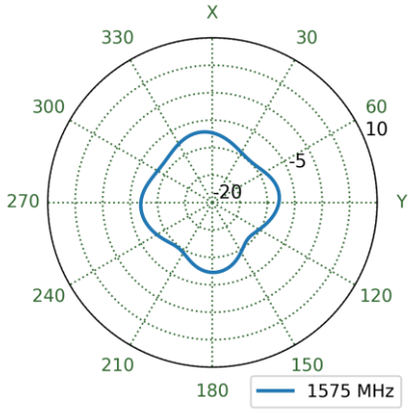



chanhvinh.com


6.8 Patterns at 1602 MHz

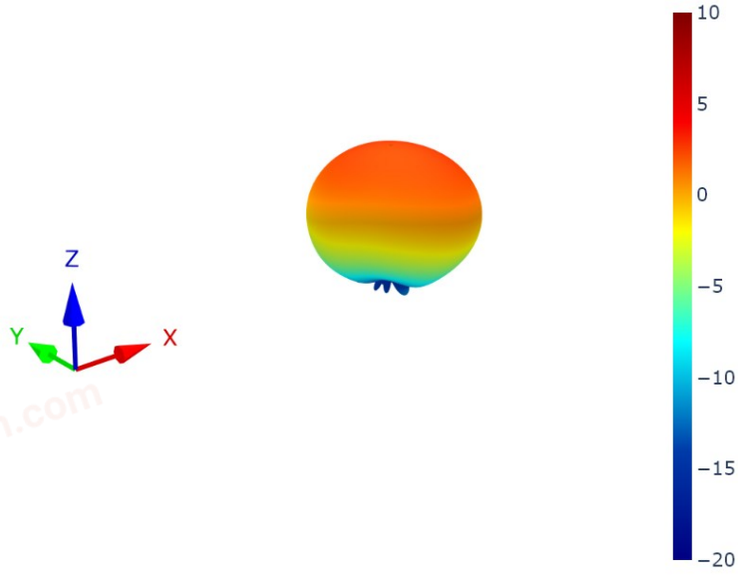

XZ Plane	YZ Plane	XY Plane

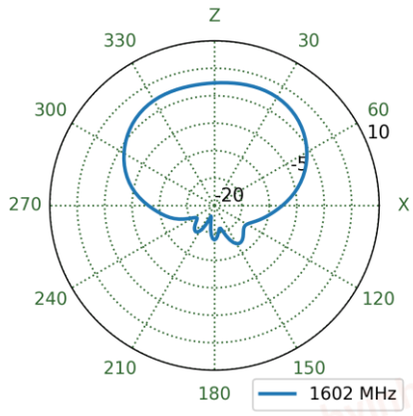

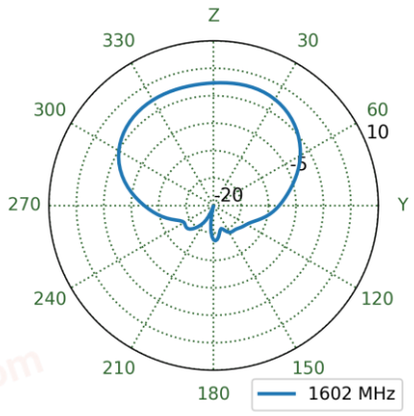


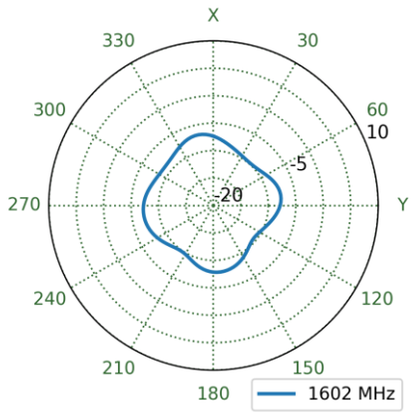


chanhvinh.com

7. LNA Characteristics

7.1 Block Diagram

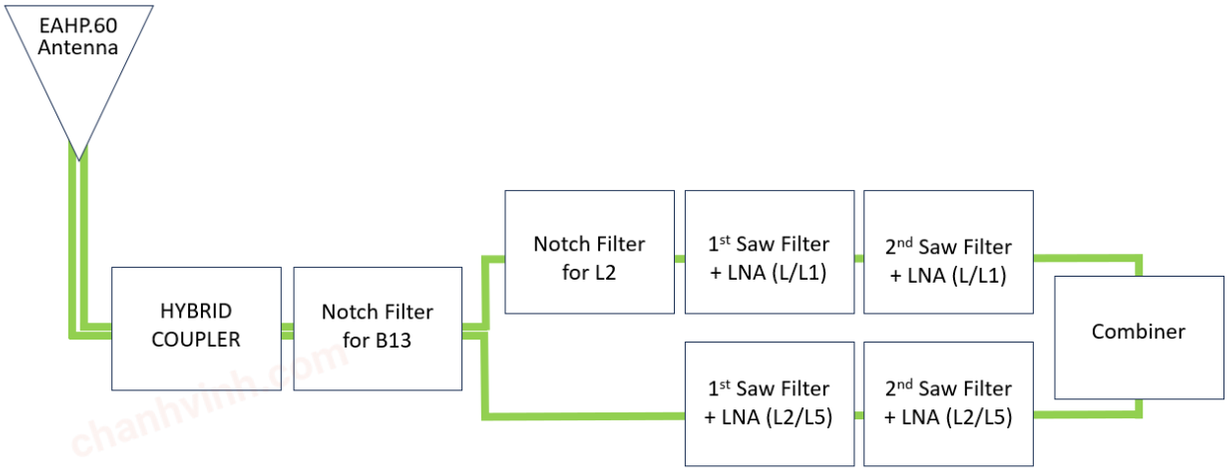


7.2 Low-Band - Gain

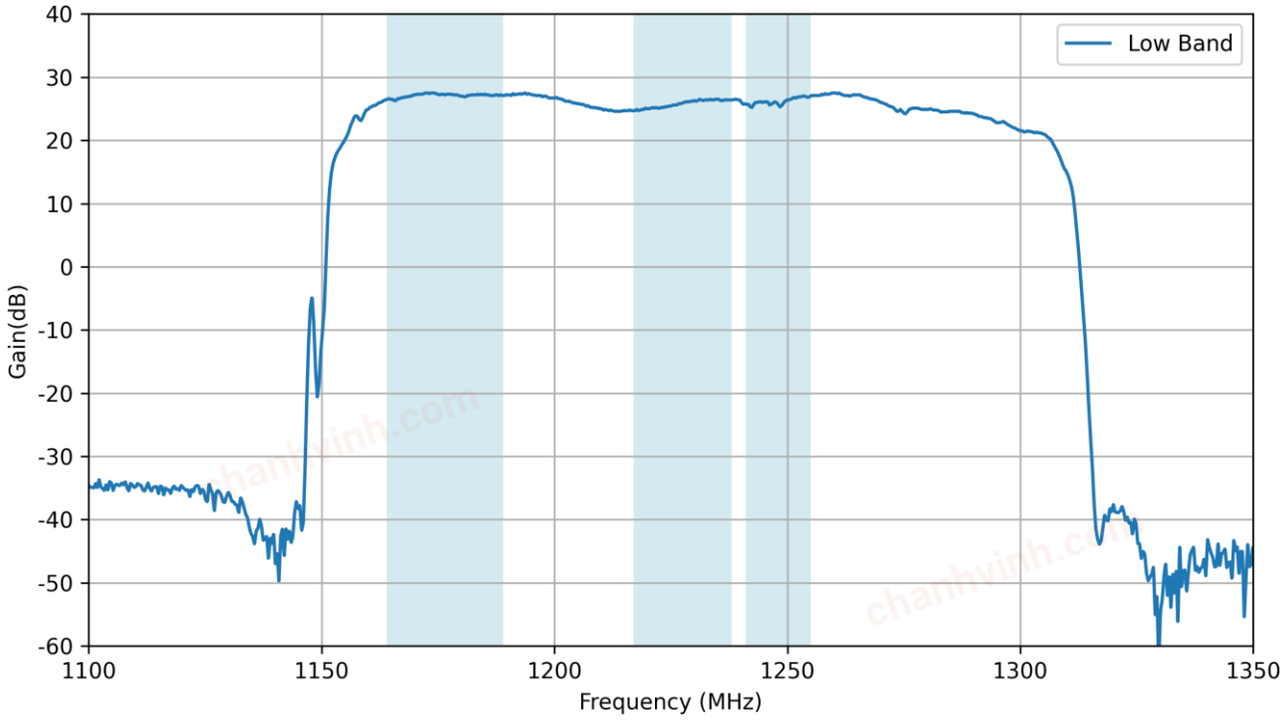


chanhvinh.com

7.3 Low-Band – Noise Figure

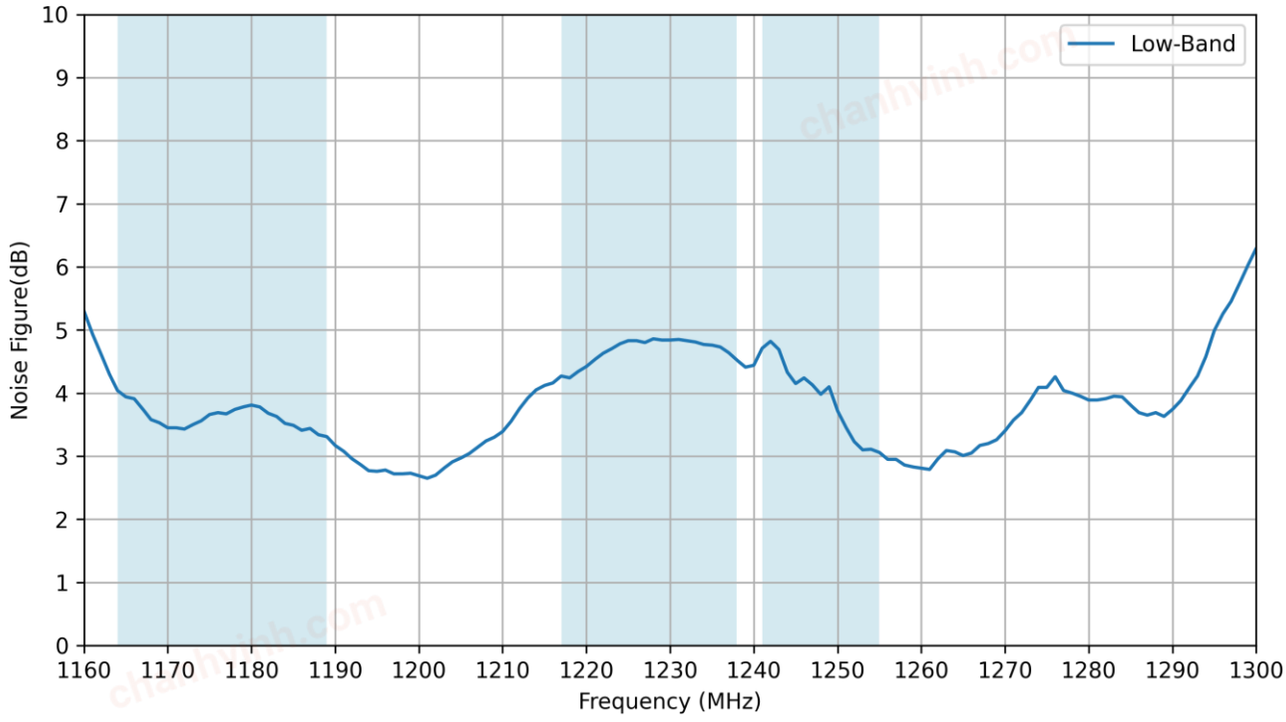


7.4 High-Band Gain

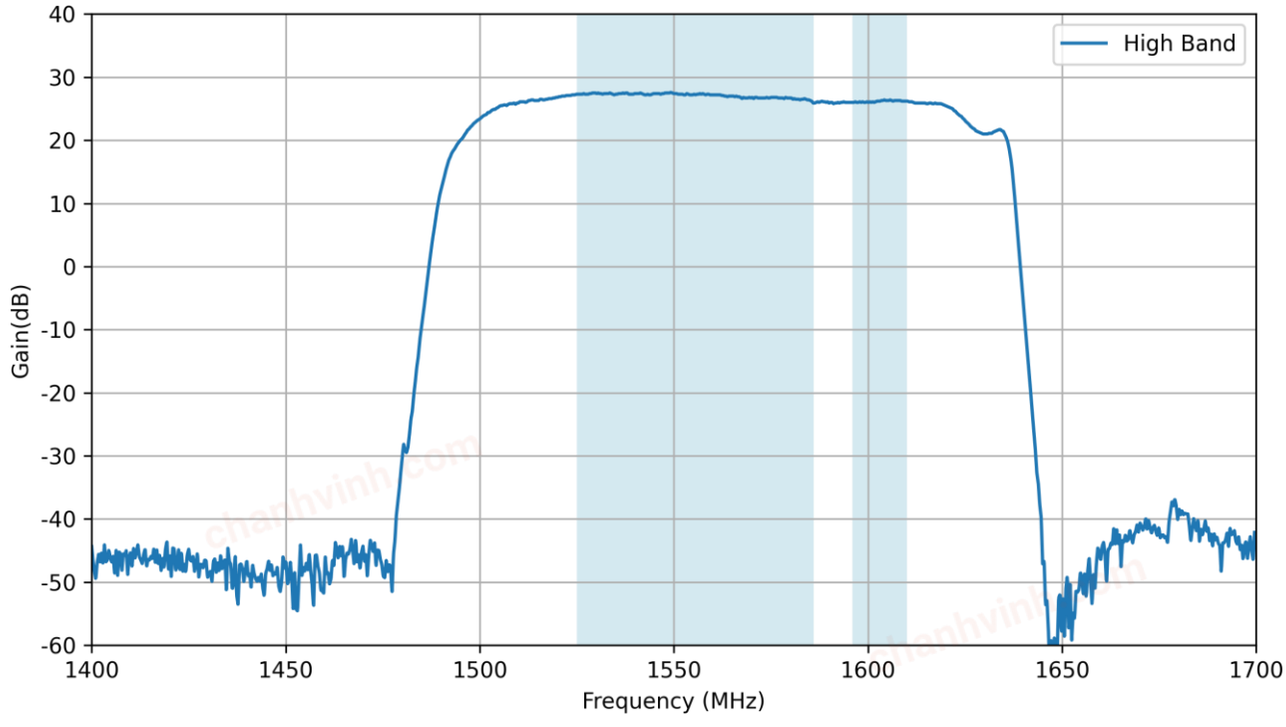


chanhvinh.com

7.5 High-Band Nosie Figure

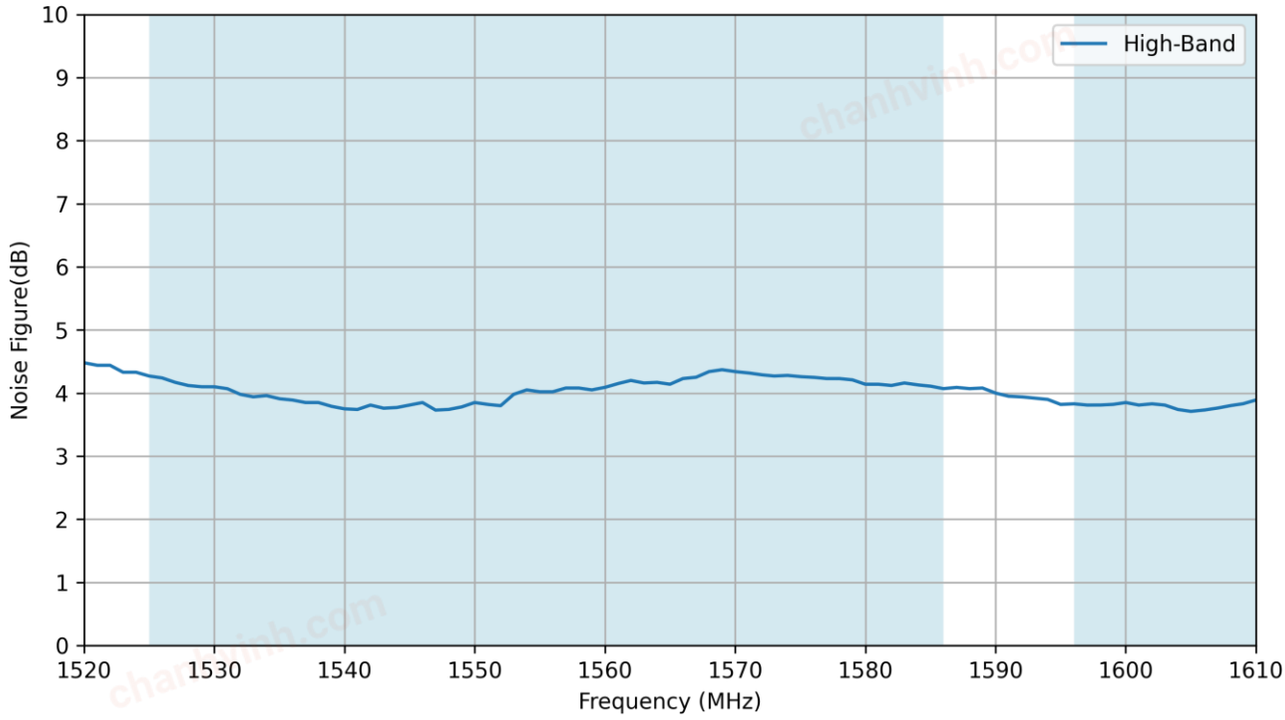

7.6 Out Of Band Rejection

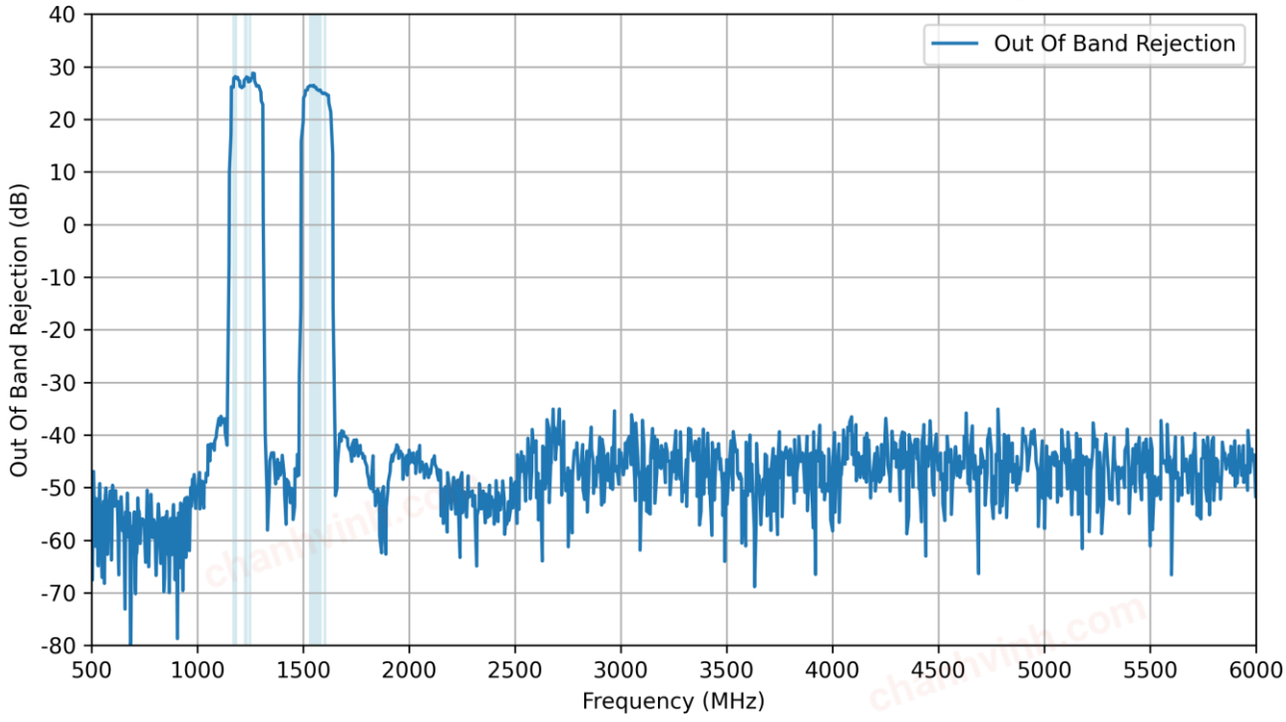

chanhvinh.com

Changelog for the datasheet

SPE-24-8-246 – EAHP.60.01.0100D

Revision: A (Initial Release)	
Date:	2024-10-03
Notes:	Initial Datasheet Release
Author:	Gary West

Previous Revisions

chanhvinh.com

TAOGLAS

TAOGLAS®

www.taoglas.com