chanhvinh.com

TDK·Lambda

PYQ75 Series

75W Single Output DC-DC converters, 1/4 Brick

https://product.tdk.com/en/power/py
www.emea.lambda.tdk.com/py





The 75W Quarter-brick footprint PYQ series of isolated DC-DC converters operate from an ultra wide range input of 9 to 75Vdc (8:1) with single output voltages from 12V to 48V. The output voltage can be adjusted between -20% to +15% by using the trim terminal. Sense lines for the output voltage ensure a stable output voltage even with changing loads. The PYQ75 models have efficiencies of up to 90% and can operate in ambient temperature of -40 to 105°C. The input to output isolation is 3,000Vac and the units are potted to provide a high resistance to shock and vibration. The converters are certified according to the 62368-1 safety standards and with additional circuits, the PYQ75 series is also tested according to the EN 50155 railroad standard for electronic equipment in railroad vehicles.

Features	Benefits
• Quarter-Brick Footprint	• Industry Standard Package Size
• 9 - 75Vdc Wide Input Range (8:1)	• Supports the Majority of Railway DC Input Voltages
• Certified to IEC 62368-1, Tested According to EN 50155	• Easier System Compliance
• Potted Plastic Case	• High Resistance to Shock and Vibration
• 3000Vac Input to Output Isolation	• Suitable For Railway and Industrial Applications

Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Output Adjust (V)	Maximum Current (A)	Maximum Power (W)	No Load Input Current (mA)	Efficiency (%) at 36 / 48Vdc	Maximum Load Capacitance (uF)
PYQ75-36WS12	9 - 75	12	9.6 - 13.8	6.25	75	8	90 / 90	14000
PYQ75-36WS15	9 - 75	15	12 - 17.25	5	75	8	90 / 90	10000
PYQ75-36WS24	9 - 75	24	19.2 - 27.6	3.12	75	10	90 / 90	3900
PYQ75-36WS28	9 - 75	28	22.4 - 32.2	2.67	75	10	90 / 90	3200
PYQ75-36WS48	9 - 75	48	38.4 - 55.2	1.56	75	10	90 / 90	1100

PYQ	75	-36W	S	12	-

- PYQ — Series
- 75 — 75 Output Power 75W
- -36W — 9 - 75V Input Voltage
- S — S Single Output
- 12 — Output Voltage: 12 = 12V; 15 = 15V; 24 = 24V; 28 = 28V; 48 = 48V
- - — Blank: Positive Logic Remote On/Off and M3 Thread; -N: Negative Logic Remote On/Off and M3 Thread; -PD: Positive Logic Remote On/Off and 3.2mm Hole; -ND: Negative Logic Remote On/Off and 3.2mm Hole

Preferred option

chanhvinh.com

Related Products

Type	Series	Description
Heatsink kit (User installation)	ACC-PYQB-HC01	HC1 heatsink, thermal pad, screws and washers
Heatsink kit (User installation)	ACC-PYQB-HC05	HC5 heatsink, thermal pad, screws and washers
DC-DC Converter	PYD20	20W, Input 8.5-160V, 2" x 1 "
DC-DC Converter	PYQ50	30-50W, Input 14-160V, quarter brick
DC-DC Converter	PYH200	200W, Input 14-160V, half brick
DC-DC Converter	CN-B	200-300W, Input 60-160V, half brick

Specifications

Model		PYQ75
Input		
Input Voltage Range	Vdc	9-75 Derate output power linearly from 75W to 60W between 12V and 9V input voltage
Input Surge Voltage	Vdc	100 (100ms maximum)
Input Shutdown Voltage	Vdc	8 Typ.
Start-up Time (typ)	ms	30 Typ.
No Load Power Consumption	-	See model selector table. Typically 5mA when remote on/off is activated
Efficiency	-	See model selector table
Conducted & Radiated EMI	-	EN55032. See installation manual for external circuitry
Immunity	-	See immunity section
Railroad Applications	-	EN 50155, EN45545-2, EN 61373, EN 50121-3-2: See application note for railroad use
Safety Certification and Markings	-	IEC/UL/CSA/EN62368-1, CE Mark and UKCA Mark

Immunity

Test	Standard	Test Level	Criteria	Notes (See installation manuals for external circuitry)
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	A	-
Radiated Susceptibility	EN61000-4-3	20V/m	A	-
Electrical Fast Transient Burst	EN61000-4-4	± 2kV	A	With an input filter of two 220uF capacitors and a
Surge	EN61000-4-5	± 2kV	A	78V suppressor diode (SMDJ78A)
Conducted Susceptibility	EN61000-4-6	10Vrms	A	-

Specifications

Model		PYQ75
Output		
Output Voltage Tolerance	%	±1
Output Voltage Adjustment	%	-20/+15
Switching Frequency	kHz	180-220
Line Regulation	%	±0.2
Load Regulation	%	±0.2
External Load Capacitance	-	See model selector table
Ripple & Noise(1)	mVp-p	150 (12V, 15V models), 240 (24V, 28V models), 480 (48V model)
Temperature Coefficient	%/°C	±0.02
Minimum Load	-	No minimum load required
Transient Loading	-	250us recovery time for a 25% load change
Overcurrent Protection (typ)	%	110-210 (hiccup mode)
Overvoltage Protection (typ)	%	117-140
Overtemperature Protection	°C	110, automatic recovery when temperature falls below 100
Remote Sense	%	+15
Remote On/Off	-	Positive Logic (Blank): ON: Open or 4-75V, OFF Short or 0-1V Negative Logic (-N): ON: Short or 0-1V, OFF: Open or 4-75V

chanhvinh.com

Specifications


Model		PYQ75
Environmental		
Operating Temperature(2)	°C	-40 to +105 (see derating section and confirm case temperatures in end system)
Maximum Case Temperature	°C	105
Storage Temperature	°C	-55 to +125
Humidity (non condensing)	%RH	95 (maximum, for operation & storage)
Cooling	-	Convection, conduction or forced air
Altitude	m	5,000 (operating)
Withstand Voltage (For 1 minute)	Vac	Input to output 3000Vac, input to case 2100Vac, output to case 1500Vac
Isolation Capacitance	pF	1000 (input to output)
Shock and Vibration (Operating)	-	MIL-STD-810F, EN61373
Thermal Shock	-	MIL-STD-810F
Other		
Weight (Typ)	g	66
Size (LxWxH)	mm	57.9 x 36.8 x 12.7
Size (LxWxH)	Inches	2.28 x 1.45 x 0.5
Case Material	-	Plastic
Base Plate Material	-	Aluminium
MTBF - MIL-HDBK-217F, Full Load, GB25	Hours	663,000 - 780,000 depending on model
Warranty	yrs	3

Notes
See website for detailed specifications, test methods and installation manual
(1): Measured with a 22µF electrolytic/tantalum capacitor and a 1µF ceramic multi-layer capacitor parallel in measurement path.
(2). The case temperature must be confirmed in the end application. The product rating may be affected by airflow direction and physical obstructions near the module.

Derating Curve - Vertical Mount, Natural Convection


The possible temperature range depends on the power dissipation at the operating point of the DC-DC converter and the cooling method used.
See installation manual for details.

Power Dissipation (without heatsink)

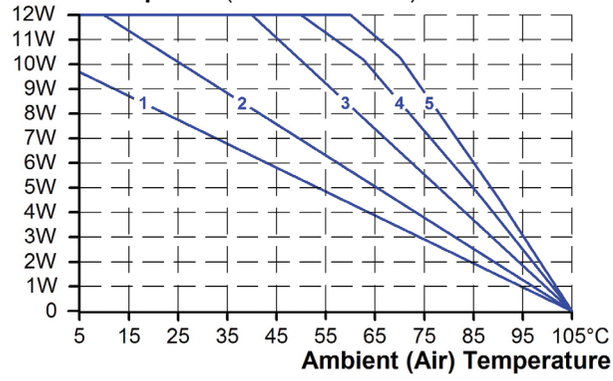

1. Natural convection 20LFM (0.1m/s, RTH 10.1°C/W)
2. Forced air 100LFM (0.5m/s, RTH 8.0°C/W)
3. Forced air 200LFM (1.0m/s, RTH 5.4°C/W)
4. Forced air 300LFM (1.5m/s, RTH 4.4°C/W)
5. Forced air 400LFM (2.0m/s, RTH 3.4°C/W)


Power Dissipation (with heatsink ACC-PYQB-HC01)

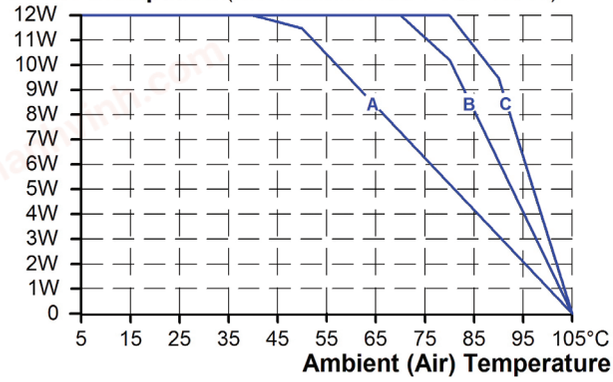

A. Natural convection 20LFM (0.1m/s, RTH 4.78°C/W)
B. Forced air 100LFM (0.5m/s, RTH 2.44°C/W)
C. Forced air 400LFM (2.0m/s, RTH 1.58°C/W)

chanhvinh.com

Outline Drawing and Pinout

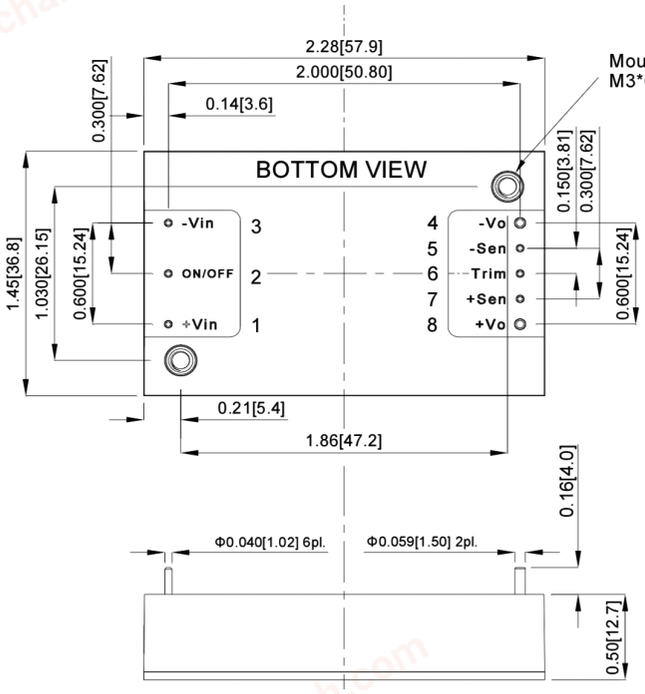

Pin Assignment:

Pin	Function
1	+V Input
2	R/C
3	-V Input
4	-V Output
5	- Sense
6	Trim
7	+ Sense
8	+V Output


All dimensions in inch [mm]

Inch Tolerances:	x.xx±0.02, x.xxx±0.01
Millimetre Tolerances:	x.x±0.5, x.xx±0.25

Recommendations for Pad Design:

Pin 4, 8:	1.8mm plated, through hole 3.3mm pad size
Pin 1, 2, 3, 5, 6, 7:	1.3mm plated, through hole 2.5mm pad size
Converter Screws:	3.5mm through hole


Recommended Wiring Scheme

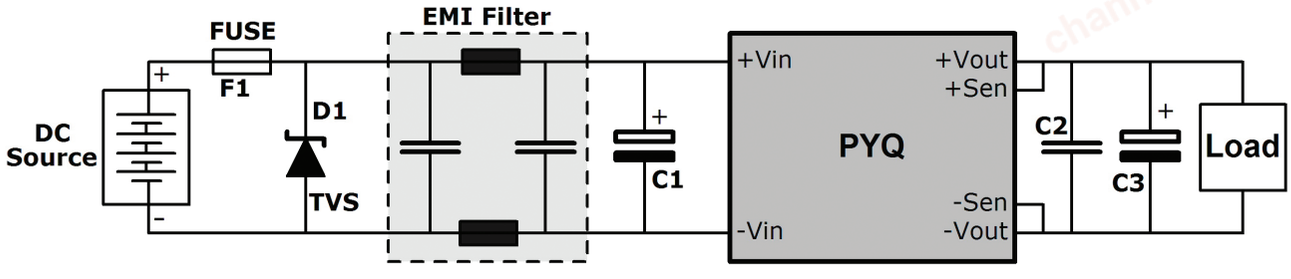



Fuse F1: The DC-DC converter is not internally fused. An external input fuse must always be used. Use a 12A slow-blow fuse.
Diode D1: Transient voltage suppressor diode (TVS) SMDJ78A.
Capacitor C1: 220uF aluminium capacitor.
Capacitor C2: 1uF multi layer ceramic capacitor.
Capacitor C3: 22µF aluminium or tantalum capacitor.
EMI Filter: This filter reduces the conducted emission to the input. See installation manual for details.


chanhvinh.com

Heatsinks

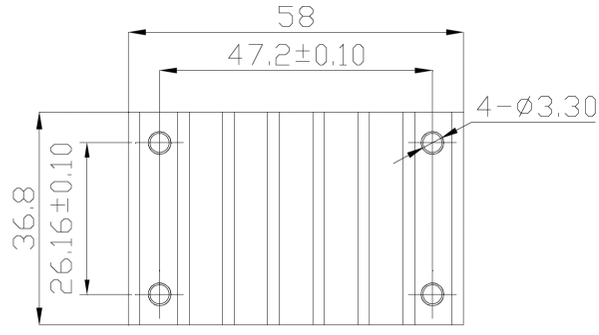

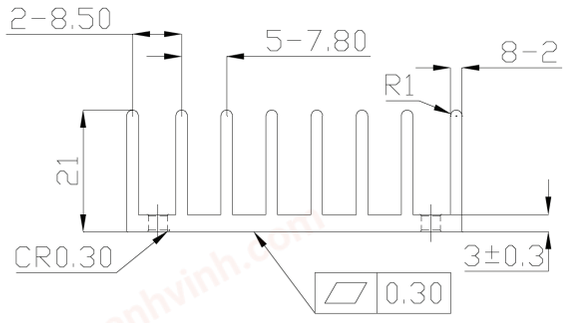

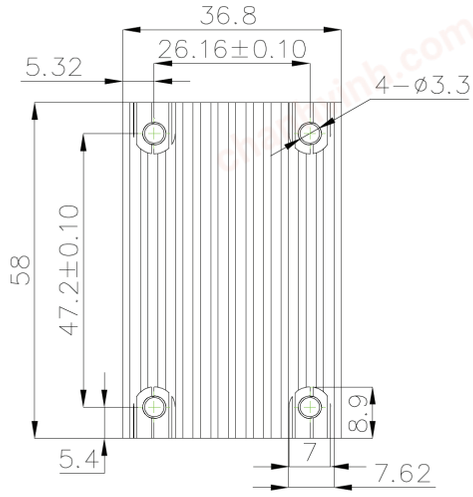

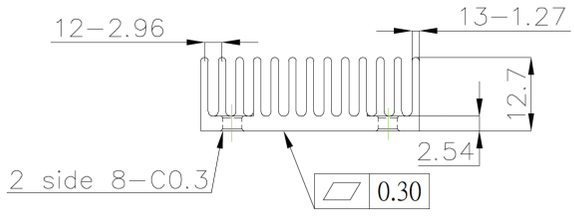

	ACC-PYQB-HC01	ACC-PYQB-HC05
Fin Style	**Transverse**	**Longitudinal**
Size (L x W x H)	58 x 36.8 x 21mm	36.8 x 58 x 12.7mm
Thermal Impedance	4.78°C/W nat. convection	5.61°C/W nat. convection
	2.44°C/W with 100LFM	4.01°C/W with 100LFM
	2.06°C/W with 200LFM	3.39°C/W with 200LFM
	1.76°C/W with 300LFM	2.86°C/W with 300LFM
	1.58°C/W with 400LFM	2.49°C/W with 400LFM

chanhvinh.com

Trusted • Innovative • Reliable

TDK·Lambda



TDK-Lambda France SAS
Tel: +33 1 60 12 71 65
tlf.fr.powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



Italy Sales Office
Tel: +39 02 61 29 38 63
tlf.it.powersolutions@tdk.com
www.emea.lambda.tdk.com/it



Netherlands
tlf.nl.powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH
Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



Austria Sales Office
Tel: +43 2256 655 84
tlg.at.powersolutions@tdk.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office
Tel: +41 44 850 53 53
tlg.ch.powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office
Tel: +45 8853 8086
tlg.dk.powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.
Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.
Tel: +9 723 902 4333
tli.powersolutions@tdk.com
www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas
Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda
Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation
Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.
Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.
Tel: +65 6251 7211
tls.marketing@tdk.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division
Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com

For additional information, please visit
https://product.tdk.com/en/power/

