chanhvinh.com

RSAG SERIES

Single-Phase Filter with On-board Type for High-Voltage Pulse Noise



■ FEATURES

- Amorphous core is used as the common mode coil core for the this series, which helps prevent devise errors.
- Wide range lineup for nominal current.

■ SAFETY STANDARDS

UL1283	UL File No. E62388
CSA C22.2 No.8 (cUL)	UL File No. E62388
EN60939-1/-2 (ENEC14)	Licence Ref. No. SE/07115-11


■ PRODUCT IDENTIFICATION

RSAG -2 ***

- *** : Rated current
- -2 : Number indicating the rated voltage
- RSAG : Series name

■ CONFORMITY TO RoHS Directive

■ CIRCUIT DIAGRAM

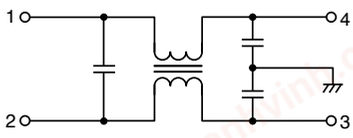


· All specifications are subject to change without notice.

chanhvinh.com


■ ELECTRICAL CHARACTERISTICS

Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)		Weight (g)
									Common mode at 20dB	Differential mode at 20dB	
RSAG-20R5	250V	0.5A	AC.1500V 60s [line - earth]	100MΩ min. [DC.500V/ 1min]	0.75mA max. [250V/60Hz]	-25 to +85℃	55℃	400 max.	0.5 to 10	1.5 to 30	14
RSAG-2001		1A						350 max.	0.5 to 10	1.5 to 30	14
RSAG-2002		2A						310 max.	1 to 20	1.5 to 30	14
RSAG-2003		3A						150 max.	1 to 20	1.5 to 30	≒25
RSAG-2004		4A						130 max.	2 to 20	1.5 to 30	≒25
RSAG-2006		6A						100 max.	2 to 20	1.5 to 30	≒25

■ DERATING GRAPH

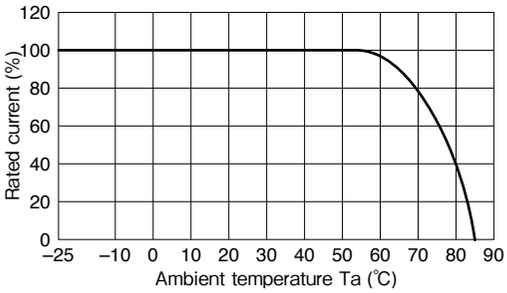

■ MECHANICAL

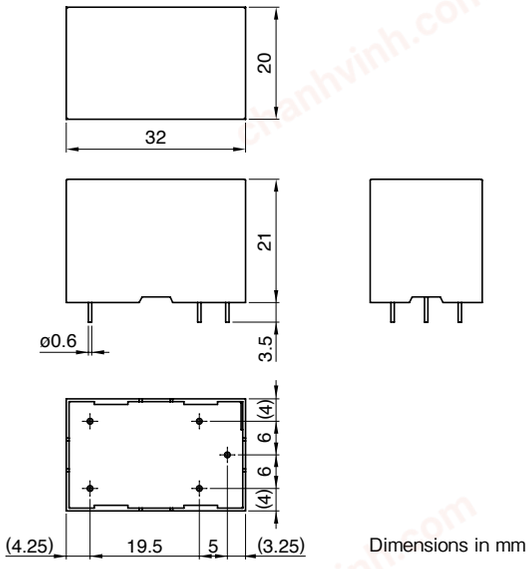


· All specifications are subject to change without notice.


chanhvinh.com

■ ATTENUATION vs. FREQUENCY CHARACTERISTICS


RSAG-20R5

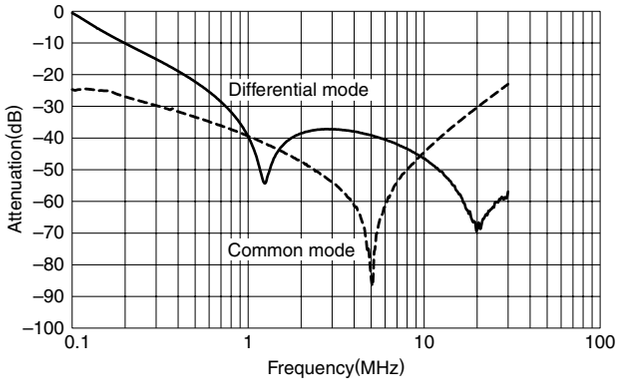


RSAG-2001

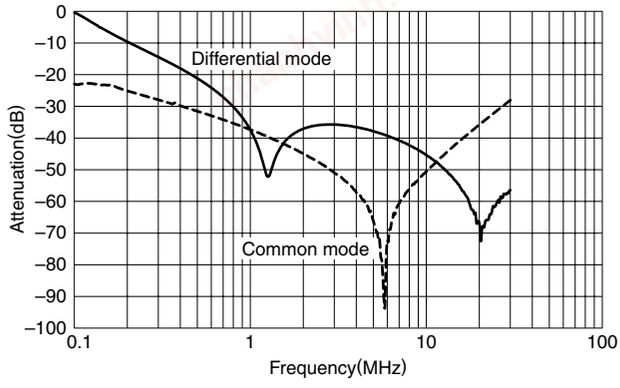


RSAG-2002

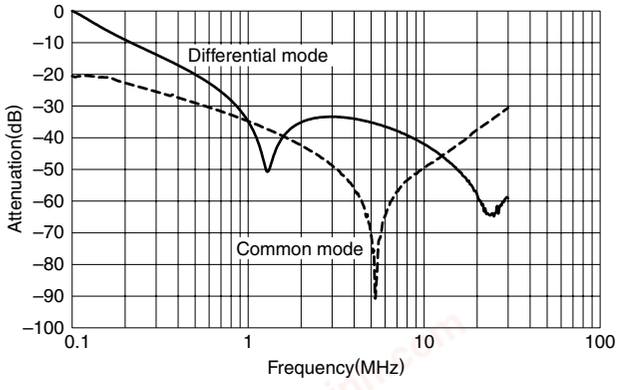


RSAG-2003

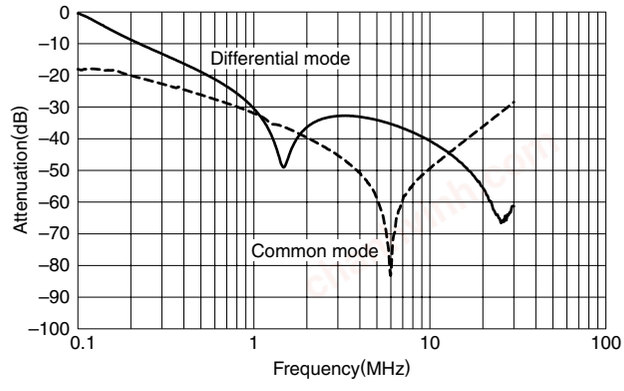

RSAG-2004

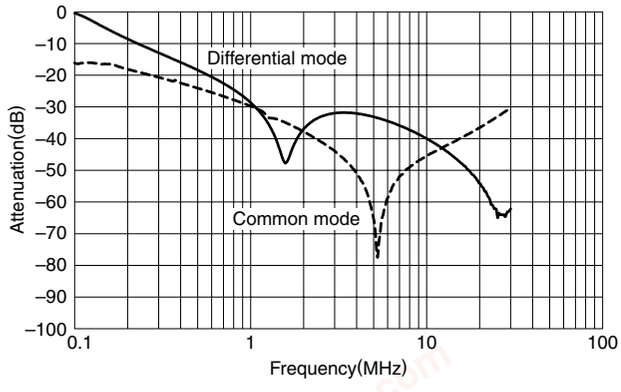


RSAG-2006

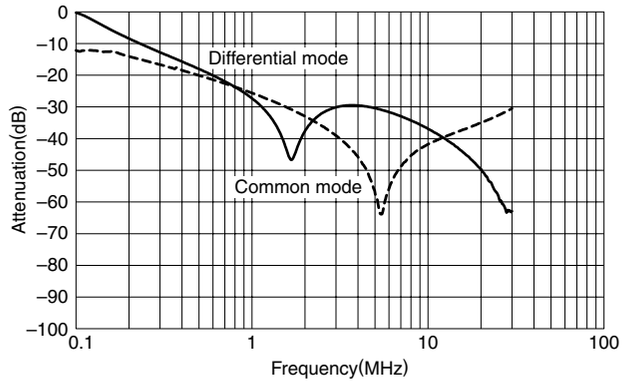


chanhvinh.com

■ PULSE ATTENUATION CHARACTERISTICS


RSAG-20R5

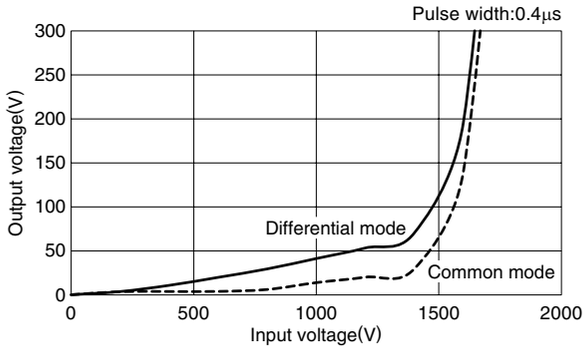


RSAG-2001

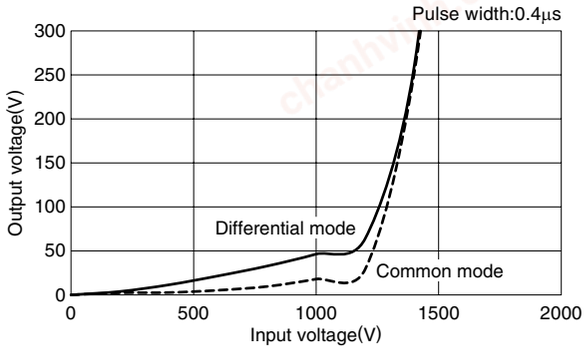


RSAG-2002

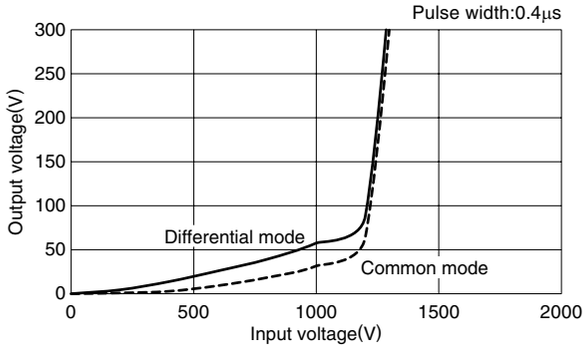


RSAG-2003

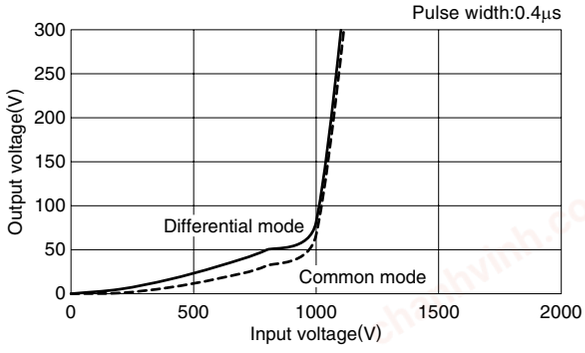

RSAG-2004

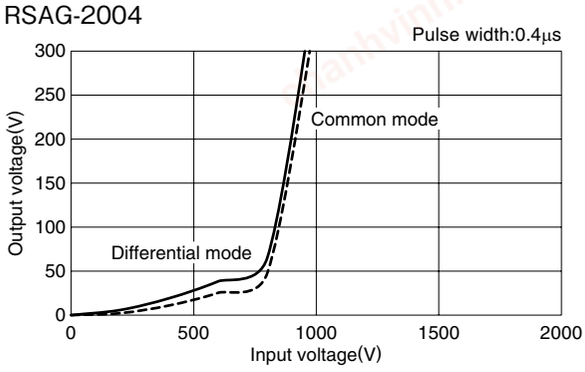

RSAG-2006

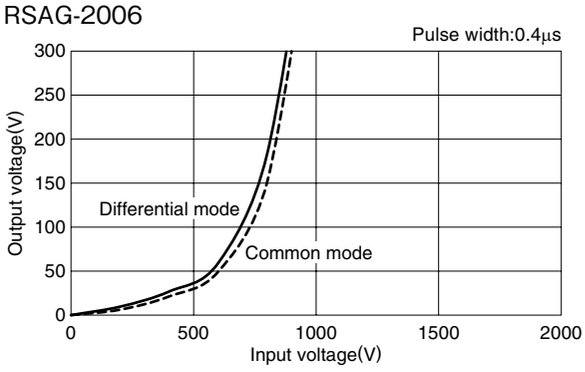

· All specifications are subject to change without notice.