
chanhvinh.com


Thermofit® Molded Parts
462A011 to 060

Transition, one to three cables

As supplied (a)

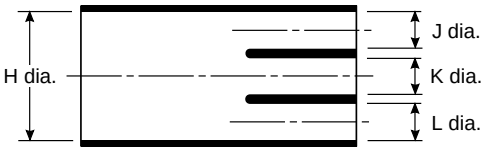

After unrestricted recovery (b)

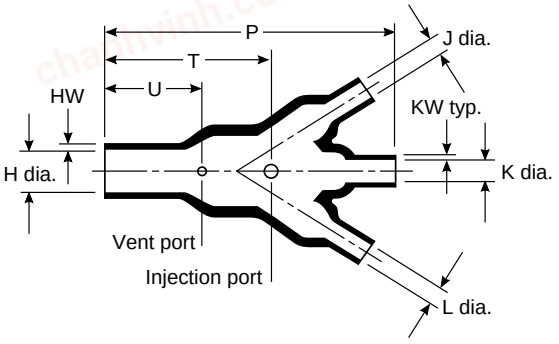

3

Applications

Provides strain relief and mechanical protection on cable harness assemblies.

Materials Available

Material	Material description	Precoating no.	Adhesive part no.
–3	Semirigid polyolefin	/42 or /86 or /180	S-1017 or S-1048 or S-1030
–4	Flexible polyolefin	/42 or /86 or /180	S-1017 or S-1048 or S-1030
–5	Neoprene		
–6	Flame-retardant silicone		
–12	VITON®		
–25	Fluid-resistant elastomer	/42 or /86	S-1017 or S-1048

Product Dimensions (inches *(millimeters)*)

	H		J, K&L		P
Part number	Min. a	Max. b	Min. a	Max. b	±10% b
462A011	.52 *(13.2)*	.26 *(6.6)*	.26 *(6.6)*	.14 *(3.6)*	1.82 *(46.2)*
462A023	1.06 *(26.9)*	.52 *(13.2)*	.52 *(13.2)*	.27 *(6.9)*	3.67 *(93.2)*
462A034	1.52 *(38.6)*	.74 *(18.8)*	.76 *(19.3)*	.38 *(9.7)*	5.32 *(135.1)*
462A046	2.19 *(55.6)*	1.00 *(25.4)*	1.06 *(26.9)*	.49 *(12.4)*	7.56 *(192.0)*
462A060	3.60 *(91.4)*	2.15 *(54.6)*	1.80 *(45.7)*	1.08 *(27.4)*	15.37 *(390.4)*

	T	U	HW	KW
	±10% b	±10% b	±20% b	±10% b
426A011	1.20 *(30.5)*	.62 *(15.7)*	.06 *(1.52)*	.04 *(1.02)*
462A023	2.25 *(57.2)*	1.30 *(33.0)*	.10 *(2.54)*	.06 *(1.52)*
462A034	3.50 *(88.9)*	1.80 *(45.7)*	.12 *(3.05)*	.07 *(1.78)*
462A046	4.80 *(121.9)*	2.80 *(71.1)*	.18 *(4.57)*	.12 *(3.05)*
462A060	10.00 *(254.0)*	5.00 *(127.0)*	.28 *(7.11)*	.18 *(4.57)*

Thermofit is a registered trademark of Raychem Corporation.
VITON is a registered trademark of E. I. du Pont de Nemours & Co., Inc.