chanhvinh.com

© 2022TE Connectivity. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	15AUG2023	KP	YW

EV DUAL WALL TUBING

PART AS SUPPLIED AND FULLY RECOVERED

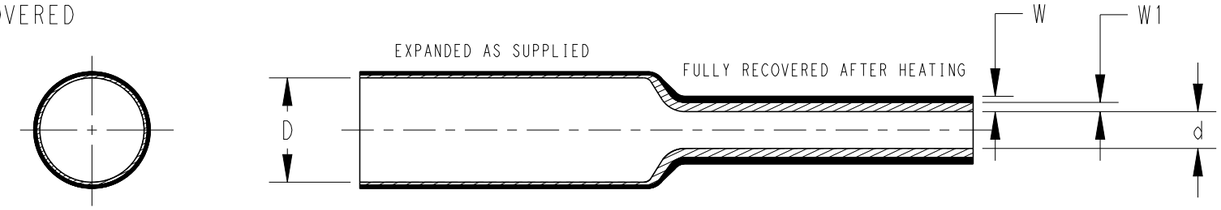


TABLE 1: DIMENSIONS mm(inches)

SIZE		INSIDE DIAMETER AS SUPPLIED (MIN) - D		INSIDE DIMATER AFTER RECOVERY (MAX) - d		TOTAL WALL THICKNESS AFTER RECOVERY - W						MINIMUM RECOVERED ADHESIVE WALL THICKNESS - W1	
						MINIMUM		MAXIMUM		NOMINAL			
mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
9/3	0.354/0.118	9.00	0.354	3.00	0.118	1.15	0.045	1.65	0.065	1.40	0.055	0.56	0.022
12/4	0.472/0.157	12.00	0.472	4.00	0.157	1.42	0.056	2.14	0.084	1.78	0.070	0.58	0.023
19/6	0.748/0.236	19.00	0.748	6.00	0.236	1.75	0.069	2.75	0.108	2.25	0.089	0.58	0.023
24/8	0.945/0.315	24.00	0.945	8.00	0.315	2.04	0.080	3.04	0.120	2.54	0.100	0.79	0.031
40/13	1.575/0.512	40.00	1.575	13.00	0.512	2.04	0.080	3.04	0.120	2.54	0.100	0.86	0.034

1. HIGH FLAME-RETARDED
2. AVAILABLE IN 3:1 EXPANSION RATIO
3. COLOR ON RECOVERED TUBE : ORANGE (RAL2003 WITH DELTA E ALLOWABLE UPTO 12)
4. REFERENCED SPECIFICATION : 108-120072
5. TUBING OF SPECIAL EXPANDED OR RECOVERED DIMENSIONS MAY BE SUPPLIED AS SPECIFIED IN THE CONTRACT OR ORDER
6. PRODUCT AVAILABLE IN DIFFERENT CUT LENGTHS

CUT LENGTH	CUT LENGTH TOLERANCE
UP TO 9.9mm	±1.5mm
10 TO 24.9mm	±1.5mm
25 TO 54.9mm	±1.5mm
55 TO 99.9mm	±3.0mm
100 TO 149.9mm	±4.0mm
150 TO 499.9mm	±5.0mm
500mm AND GREATER	±25.4mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.1
2 PLC	±0.01
3 PLC	±0.001
4 PLC	±0.0001
ANGLES	±

MATERIAL: -

FINISH: -

DWN	15AUG2023 KAMALASARAVANAN P
CHK	15AUG2023 SELVAPANDIAN B
APVD	15AUG2023 YIZHEN WANG
PRODUCT SPEC	108-120072
APPLICATION SPEC	114-120024
WEIGHT	-

TE Connectivity

NAME: HEAT-SHRINKABLE, DUAL WALL POLYOLEFIN TUBING -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-EVDW	-

CUSTOMER DRAWING

SCALE NTS | SHEET 1 OF 1 | REV A