
chanhvinh.com

P2 Relay V23079

- **Standard telecom relay (ringing and test access)**
- **Slim line 15x7.5mm (.590x.295")**
- **Max. Switching current 2A**
- **2 form C bifurcated contacts (2 changeover contacts, 2 CO)**
- **Immersion cleanable**
- **High sensitivity for low power consumption 140mW/ 70mW**

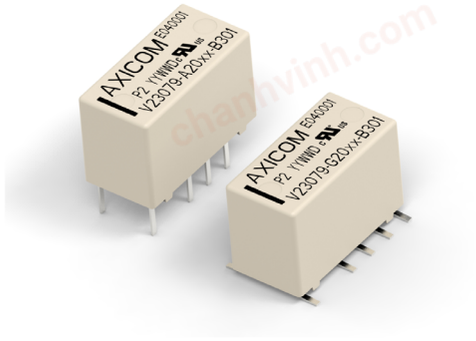

Typical applications
Communications equipment linecard application (ringing and test access), PABX, voice over IP, office equipment, measurement and control equipment, automotive equipment as CAN bus, keyless entry, speaker switch, medical equipment, consumer electronics, set top boxes, HiFi


Approvals

UL61810-1 (former UL508) No. 214025
Technical data of approved types on request

Contact Data

Contact arrangement	2 form C (CO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current, 85°C	2A
Switching Power	60W, 62.5VA
Contact material	AgNi, gold-covered
Contact style	bifurcated contact
Minimum switching voltage	100µV
Thermoelectrical potential	<10µV
Initial contact resistance	<50mΩ at 10mA, 20mV
Frequency of operation, without load	50 operations/s
Operate time	typ. 2ms, max. 4ms
Set/reset time	typ. 2ms, max. 4ms
Release time	
without diode in parallel	typ. 2ms, max. 4ms
with diode in parallel	typ. 4ms, max. 6ms
Bounce time	typ. 1ms, max. 3ms
Electrical endurance	
at 12V / 10mA	typ. $5x10^7$ operations
at 6V / 100mA	typ. $1x10^7$ operations
at 60V / 500mA	typ. $5x10^5$ operations
at 30V / 1000mA	typ. $1x10^6$ operations
at 30V / 2000mA	typ. $2x10^5$ operations
at 12V / 5000mA / 25°C	typ. $1x10^5$ operations
Contact ratings, UL	110VDC / 0.3A - 33W 30VDC / 2.0A - 60W 120VAC / 0.5A - 60VA 240VAC / 0.25A -60VA 125VAC / 1A NO Side 125VDC / 0.5A NO Side
Mechanical endurance	typ. $10x10^6$ operations

Coil Data

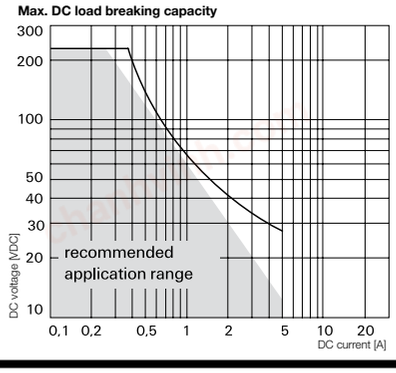


Magnetic system	polarized
Coil voltage range	2 to 24VDC
Max. coil temperature	105°C
Thermal resistance	< 125K/W

Coil versions, monostable

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.50	0.30	64	140
016	4.00	3.00	8.70	0.40	114	140
011	4.50	3.38	9.80	0.45	145	140
001	5.00	3.75	10.90	0.50	178	140
002	6.00	4.50	13.00	0.60	257	140
006	9.00	6.75	19.60	0.90	578	140
003	12.00	9.00	26.15	1.20	1029	140
005	24.00	18.00	52.30	2.40	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

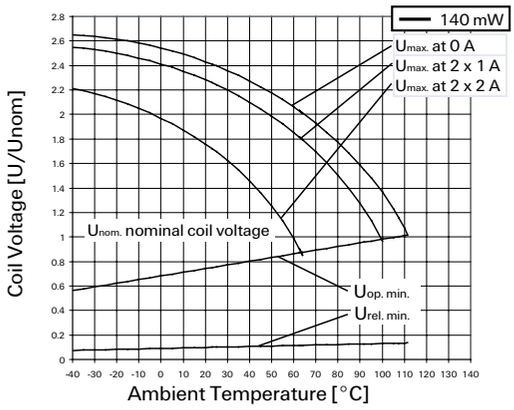

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

chanhvinh.com


P2 Relay V23079 (Continued)

Coil Data (continued)

Coil versions, bistable

Coil code	Rated voltage VDC	Set voltage VDC	Limiting Voltage VDC	Reset voltage VDC	Coil resistance Ω±10%	Rated coil power mW
Bistable, 1 coil						
108	3.00	2.25	9.2	-2.25	128	70
111	4.50	3.38	13.85	-3.38	289	70
101	5.00	3.75	15.33	-3.75	357	70
102	6.00	4.50	18.5	-4.50	514	70
106	9.00	6.75	27.75	-6.75	1157	70
103	12.00	9.00	37	-9.00	2057	70
105	24.00	18.00	74	-18.00	8228	70
Bistable, 2 coil						
219	2.00	1.50	4.33	1.50	28	140
218	2.40	1.80	5.2	1.80	41	140
208	3.00	2.25	6.5	2.25	64	140
211	4.50	3.38	9.8	3.38	145	140
201	5.00	3.75	10.9	3.75	178	140
202	6.00	4.50	13	4.50	257	140
206	9.00	6.75	19.6	6.75	578	140
203	12.00	9.00	26.15	9.00	1029	140
205	24.00	18.00	52.3	18.00	4114	140


All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

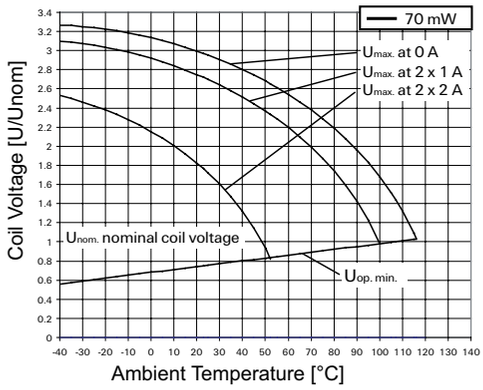

Coil versions, high dielectric version, monostable, overmolded

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release Voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.1	0.30	45	200
001	5.00	3.75	10.1	0.50	125	200
002	6.00	4.50	12.1	0.60	180	200
006	9.00	6.75	18.2	0.90	405	200
003	12.00	9.00	24.2	1.20	720	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

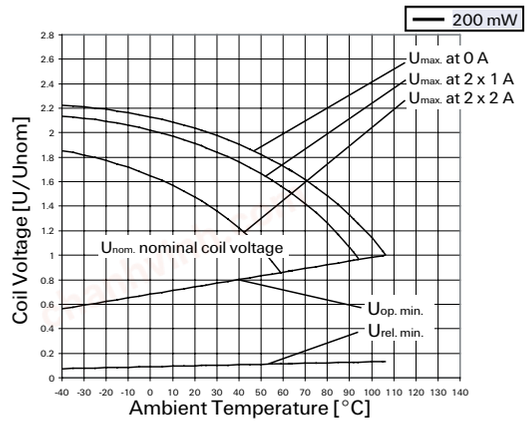

Insulation Data	Standard	HDV
Initial dielectric strength		
between open contacts	$1000V_{rms}$	$1500V_{rms}$
between contact and coil	$1500V_{rms}$	$1500V_{rms}$
between adjacent contacts	$1000\ V_{rms}$	$1500V_{rms}$
Initial surge withstand voltage		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
Initial insulation resistance at 500 Vdc	$> 10^9\Omega$	
Capacitance		
between open contacts	max. 1pF	
between contact and coil	max. 2pF	
between adjacent contacts	max. 1.5pF	
Clearance /creepage	1.3/2.5mm	

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter	
Ambient temperature	-40 to +85°C
Category of environmental protection	
IEC 61810	RT III - wash tight
Vibration resistance (functional)	35g, 10 to 1000Hz
Shock resistance (functional)	
IEC 60068-2-27 (half sine)	100g
Terminal type	PCB-THT, SMT long and short terminals
Weight	max. 2.8 g
Resistance to soldering heat THT	
IEC 60068-2-20	265°C/10s
Moisture sensitive level, JEDEC J-Std-020E	MSL3
Related to SMT relays and THT relays packed in reel	
Ultrasonic cleaning	not recommended
Packaging/unit	
THT	tubes/2000 pcs.
THT	reel/1500 pcs.
SMT	reel/2000 pcs. or 2500 pcs.

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


chanhvinh.com

P2 Relay V23079 (Continued)


Terminal assignment

TOP view on component side of PCB


Monostable version



Bistable version, 1-coil



Bistable version, 2-coils




Contacts are shown in reset condition.
Both coils can be used as either set or reset coils.
Contact position might change during transportation and must be reset before use.


PCB layout

TOP view on component side of PCB


THT version

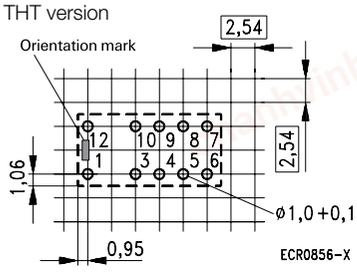

SMT, long terminals




SMT, short terminals




Dimensions

Overmolded coil, high dielectric version


THT version



SMT, long terminals

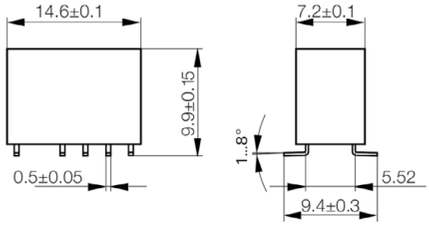

SMT, short terminals

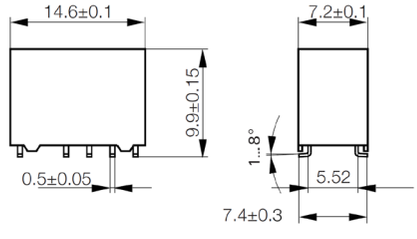

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.


Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions


Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

chanhvinh.com

P2 Relay V23079 (Continued)


Processing

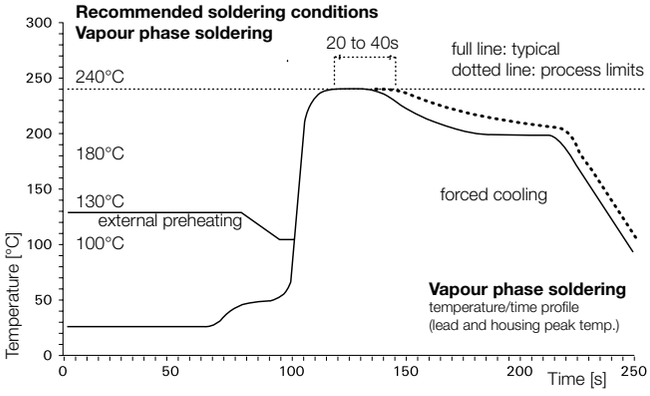

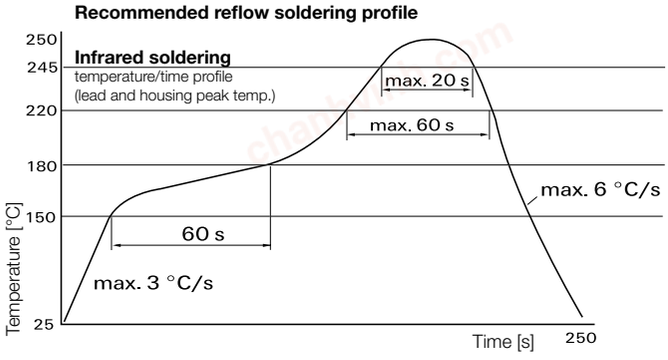


Packing

THT-tubes

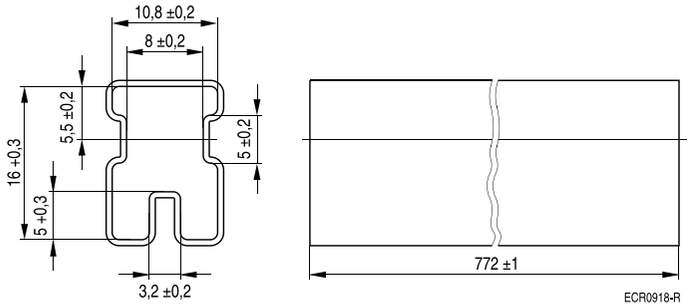

Reel dimensions

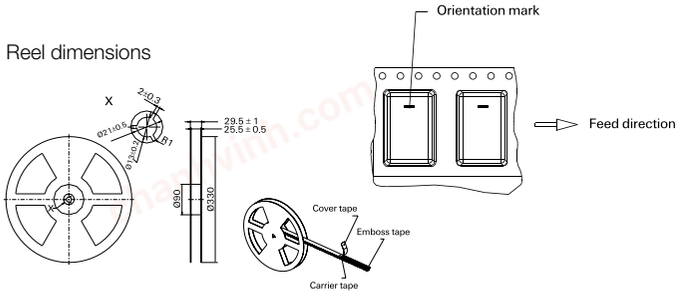

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.


Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


chanhvinh.com

P2 Relay V23079 (Continued)


SMT - LONG TERMINALS

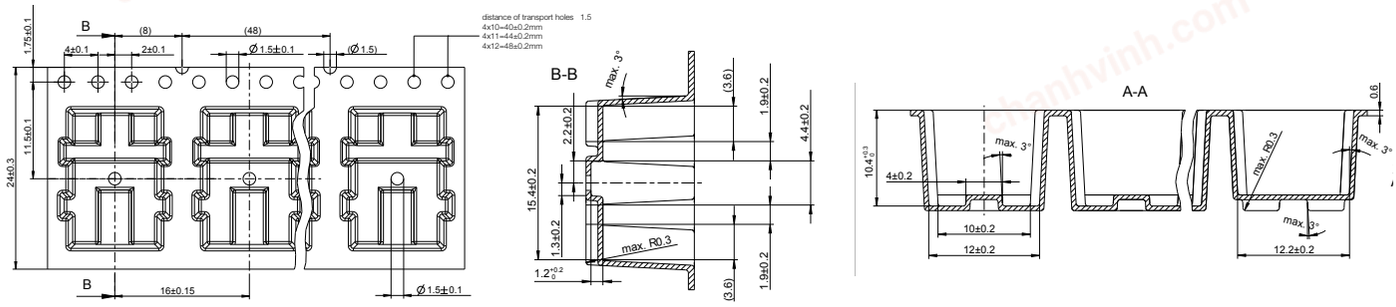

SMT - SHORT TERMINALS

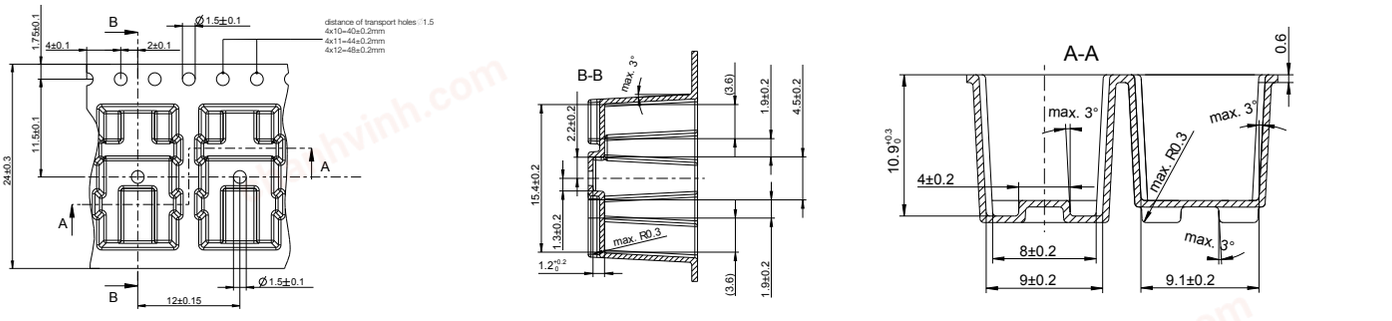

THT - REEL

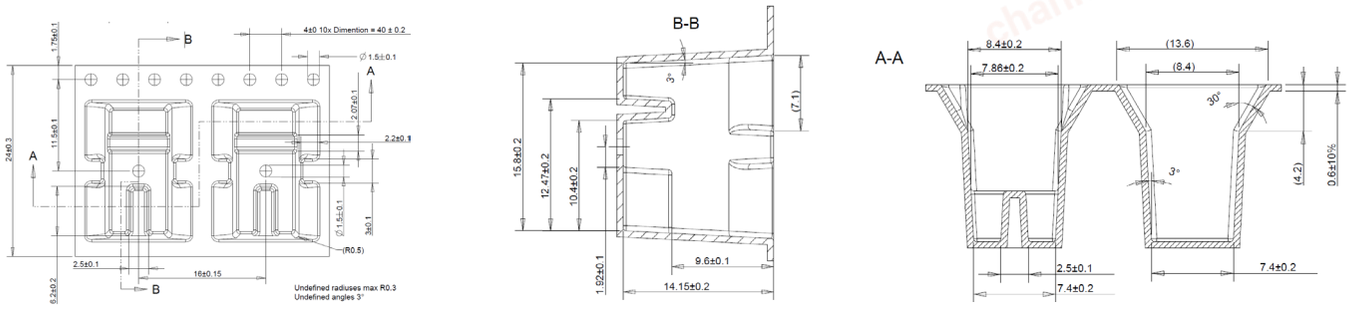

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

chanhvinh.com

P2 Relay V23079 (Continued)

Product code structure	Typical product code	V23079	A	2	001	B	301

Type
V23079 Signal Relay P2 Series

Version

A	THT, monostable	**D**	SMT, monostable, long term.	**G**	SMT, monostable, short term.
B	THT, latching, 2 coils	**E**	SMT, latching, 2 coils long term.	**H**	SMT, latching, 2 coils short term.
C	THT, latching, 1 coil	**F**	SMT, latching, 1 coil long term.	**J**	SMT, latching, 1 coil short term.

Coil design
2 Overmolded coil
1 Overmolded coil (not available for new design)

Coil
Coil code: please refer to coil versions table

Version
B Standard version
X Special version (High dielectric, THT packed in reel)

Contacts for standard versions
301 2 form C contacts (2 CO), AgNi +Au

Contacts for dielectric versions
07* 2 form C contacts (2 CO), AgNi +Au

Packing
X1** THT version packed in reel

* any digit

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

chanhvinh.com

Product code	Version	Coil design	Coil type	Coil voltage	Part number
V23079-A2008-B301	THT	Overmolded	Monostable	3VDC	6-1419120-6
V23079-A2011-B301				4.5VDC	3-1393789-9
V23079-A2001-B301				5VDC	3-1393789-5
V23079-A2002-B301				6VDC	3-1393789-6
V23079-A2006-B301				9VDC	3-1393789-8
V23079-A2003-B301				12VDC	3-1393789-7
V23079-A2005-B301				24V	1-1422025-0
V23079-A2016-B301				4V	1393790-3
V23079-B2219-B301				2VDC	1-1422002-2
V23079-B2218-B301				2.4VDC	1-1422002-1
V23079-B2208-B301				3VDC	1-1422002-0
V23079-B2201-B301				5VDC	1422002-9
V23079-B2211-B301				4.5VDC	1-1422002-7
V23079-D2008-B301	SMT, long pins	Overmolded	Monostable	3VDC	4-1393789-7
V23079-D2011-B301				4.5VDC	4-1393789-8
V23079-D2001-B301				5VDC	4-1393789-3
V23079-D2002-B301				6VDC	4-1393789-4
V23079-D2006-B301				9VDC	4-1393789-6
V23079-D2003-B301				12VDC	4-1393789-5
V23079-D2016-B301				4VDC	1393790-4
V23079-E2219-B301			Bistable, 2 coils	2VDC	1422007-6
V23079-E2201-B301				5VDC	1422007-7
V23079-E2206-B301				9VDC	6-1422008-9
V23079-E2208-B301				3VDC	1422007-8
V23079-E2218-B301				2.4VDC	1422007-9
V23079-E2211-B301				4.5V	1-1422007-6
V23079-G2008-B301	SMT, short pins		Monostable	3VDC	5-1393789-4
V23079-G2016-B301				4VDC	1393790-5
V23079-G2011-B301				4.5VDC	5-1393789-5
V23079-G2001-B301				5VDC	4-1393789-9
V23079-G2002-B301				6VDC	5-1393789-0
V23079-G2006-B301				9VDC	5-1393789-3
V23079-G2003-B301				12VDC	5-1393789-1
V23079-G2008-X079		High dielectric		3VDC	1422006-5
V23079-G2001-X071		Overmolded		5VDC	1422006-1
V23079-G2002-X072				6VDC	1422006-2
V23079-G2006-X073				9VDC	1422006-3
V23079-G2003-X074				12VDC	1422006-4
V23079-A2003-X074	THT			12VDC	1422025-7
V23079-A2008-X079				3VDC	1-1422025-1
V23079-A2008-X101	THT packed in reel	Overmolded		3VDC	6-1419170-9
V23079-A2011-X102				4.5VDC	3-1393790-1
V23079-A2001-X103				5VDC	3-1393790-2
V23079-A2002-X104				6VDC	3-1393790-3
V23079-A2006-X105				9VDC	3-1393790-4
V23079-A2003-X106				12VDC	3-1393790-5
V23079-B2219-X107			Bistable, 2 coils	2VDC	1-1422003-0
V23079-B2218-X108				2.4VDC	1-1422003-1
V23079-B2208-X109				3VDC	1-1422003-2
V23079-B2201-X110				5VDC	1422003-3

Note:
1. Not shown part numbers upon request.
2. All product with coil design 1 produced before 01/2023 contain the old standard coil design.

03-2023, Rev. 0323
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.