chanhvinh.com

S9025PL/S9025PR

Mini RFID Panel Antenna
902-928 MHz



Laird Connectivity S9025PL/S9025PR are high-performance RFID antennas and the only UHF RFID antenna available to the market that offers no-compromise performance in a small package. At only 5.2" square, the antenna offers a gain specification of 5.5 dBic and axial ratio better than 2 dB. In effect, the antenna is providing the performance one would expect of a much larger antenna. The antenna is not only mechanically robust but is less likely to be exposed to excessive damage by virtue of its reduced size.

FEATURES AND BENEFITS

- Circularly polarized
- Low VSWR and axial ratio
- Rugged, ultra-heavy-duty construction
- IP67-rated
- Left-hand and right-hand CP versions
- Weather and UV resistant radome
- High performance in a small package
- Wide range of connector and cable options

APPLICATIONS


- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

ELECTRICAL SPECIFICATIONS	
Antenna Model	S9025PR/S9025PL
Operating Frequency (MHz)	902 - 928
VSWR – Max	1.5:1
Gain (dBi)	5.5
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	10
Polarization	Circular RH or Circular LH
Horizontal Plane 3 dB Beamwidth	100°
Front-to-Back Ratio (dB)	8
Axial Ratio – Typical (dB)	2.0

MECHANICAL SPECIFICATIONS	
Dimensions – length x width x height – mm (inches)	132.1 x 132.1 x 17.8 (5.2 x 5.2 x .71)
Weight – kg (lbs.)	.37 (.8)
Mounting Style	Threaded Stud 2x #10-32
Radome Material	White High Strength PC
Lightning Protection	DC Grounded
Connector Type	Type N-Female, RP-TNC Female, RP-SMA-Female, SMA-Female

ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature – °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Impact Resistance	1 lb. ball drop, 24"
Salt	MIL-STD-810
Vibration	MIL-STD-810
Shock	IEC 68-2-27
Humidity	IEC 68-2-27
Ingress Protection Rating	IP67

RADIATION PATTERNS

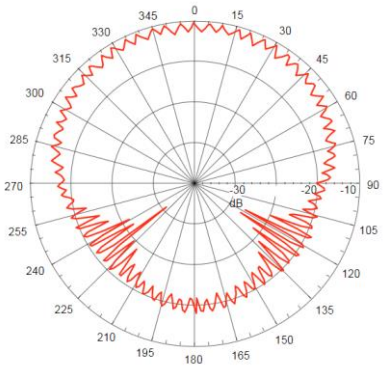

RoHS

Laird Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird Connectivity product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials rests with the end user, since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to the fitness, merchantability or suitability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2020 Laird Connectivity All Rights Reserved. Laird Connectivity, the Laird Connectivity logo, and other marks are trademarks or registered trademarks of Laird Connectivity or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property rights.

sales@lairdconnect.com | support@lairdconnect.com | www.lairdconnect.com