chanhvinh.com

TELTONIKA | Networks


5G MOBILE SMA ANTENNA



PARAMETER	RATED VALUE
Frequency Range	617~960, 1410~1610, 1710~2690, 3300~7125 MHz
Polarization	Linear (vertical)
Gain	4.5 dBi max
V.S.W.R	3 max
Impedance	50 Ω
Connector	SMA Male
Operating Temperature	-40 °C to +85 °C
IP rating	IP33
RoHS Compliant	✓
Weight	24 g





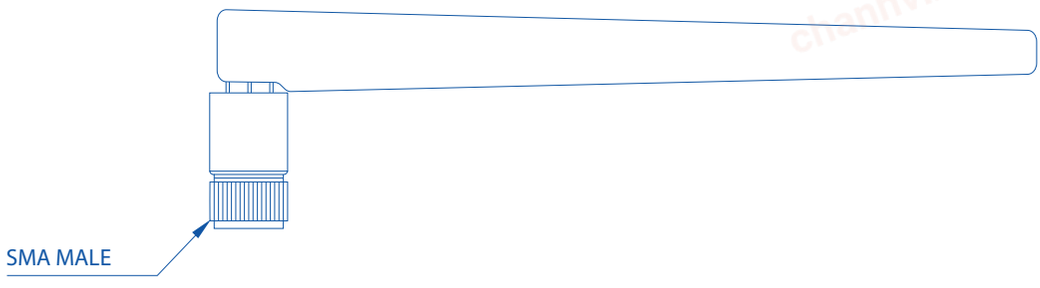

Copyright © 2022, TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by TELTONIKA NETWORKS without prior notice.