chanhvinh.com

TRACO POWER

DC/DC Converter

TMDC 40 Series, 40 Watt

- **Fully encapsulated low profile plastic case**
- **Ultra wide 4:1 input voltage range**
- **Operating temperature range –40°C to +85°C**
- **I/O isolation 2500 VDC**
- **Excellent efficiency up to 92 %**
- **Input filter to meet EN 55022, class A**
- **Optional DIN-Rail mount adapter**
- **No minimum load required**
- **Power good LED indicator and remote on/off function**
- **3-year product warranty**



UL 62368-1 IEC 62368-1

The TMDC 40 Series is a range of encapsulated high performance DC/DC converter modules. With a very high efficiency of up to 92% and the use of highest reliable components these 40 W converters are avialable as a chassis-mount with screw terminlas or PCB versions. The 8 models have a wide 4:1 input voltage range and a tight output voltage regulation. They do not need a minimum load and offer a high efficiency also at low load conditions. They feature a remote control input and a green power good LED which indicates the presence of the output voltage. Protection against overload and short circuit are standard features of these converters. EMC characteristics and safety certifications are aligned for the operation in industrial environment.

Models

Order Code	Input Voltage Range	Output Voltage nom.	Output Current max.	Efficiency typ.
TMDC 40-2411	9 - 36 VDC (24 VDC nom.)	5.1 VDC	8'000 mA	90 %
TMDC 40-2412		12 VDC	3'330 mA	90 %
TMDC 40-2415		24 VDC	1'670 mA	90 %
TMDC 40-2418		48 VDC	835 mA	89 %
TMDC 40-4811	18 - 75 VDC (48 VDC nom.)	5.1 VDC	8'000 mA	89 %
TMDC 40-4812		12 VDC	3'330 mA	91 %
TMDC 40-4815		24 VDC	1'670 mA	92 %
TMDC 40-4818		48 VDC	835 mA	90 %

Options

TMP-MK2	- Optional DIN-Rail Mounting Kit: www.tracopower.com/products/tmp-mk2.pdf

chanhvinh.com

Input Specifications

Input Current	- At no load	24 Vin models:	90 mA typ.
		48 Vin models:	55 mA typ.
	- At full load	24 Vin models:	1'868 mA typ.
		48 Vin models:	927 mA typ.
Surge Voltage		24 Vin models:	50 VDC max. (100 ms max.)
		48 Vin models:	100 VDC max. (100 ms max.)
Under Voltage Lockout		24 Vin models:	7.5 VDC typ.
		48 Vin models:	16 VDC typ.
Recommended Input Fuse			(The need of an external fuse has to be assessed in the final application.)
Input Filter			Internal Pi-Type

Output Specifications

Voltage Set Accuracy			±2% max.
Regulation	- Input Variation (Vmin - Vmax)		0.5% max.
	- Load Variation (0 - 100%)		1% max.
Ripple and Noise (20 MHz Bandwidth)		5.1 Vout models:	100 mVp-p max.
		12 Vout models:	150 mVp-p max.
		24 Vout models:	150 mVp-p max.
		48 Vout models:	200 mVp-p max.
Capacitive Load		5.1 Vout models:	13'600 µF max.
		12 Vout models:	2'400 µF max.
		24 Vout models:	600 µF max.
		48 Vout models:	150 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.02 %/K max.
Start-up Time			30 ms max.
Short Circuit Protection			Continuous, Automatic recovery
Output Current Limitation			150% typ. of Iout max.
Overvoltage Protection			120% typ. of Vout nom. (By Zener diode)
Transient Response	- Response Deviation		5% max. (75% to 100% Load Step)
	- Response Time		250 µs typ. (75% to 100% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	CSA-C22.2, No. 60950-1 EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Certification Documents	www.tracopower.com/overview/tmdc40
Pollution Degree		PD 2

EMC Specifications

EMI Emissions			EN 61000-6-4 (Generic Industrial) EN 61204-3 (Low Voltage Power Supplies)
	- Conducted Emissions		EN 55032 class A (internal filter) FCC Part 15 class A (internal filter)
	- Radiated Emissions		EN 55032 class A (with external filter) FCC Part 15 class A (with external filter)
		External filter proposal:	www.tracopower.com/overview/tmdc40

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

chanhvinh.com

EMS Immunity			EN 55024 (IT Equipment)
			EN 55035 (Multimedia)
	- Electrostatic Discharge	Air:	EN 61000-4-2, ±8 kV, perf. criteria A
		Contact:	EN 61000-4-2, ±4 kV, perf. criteria A
	- RF Electromagnetic Field		EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge		EN 61000-4-4, ±2 kV, perf. criteria A
			EN 61000-4-5, ±2 kV, perf. criteria A
	- Conducted RF Disturbances		EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous:	EN 61000-4-8, 30 A/m, perf. criteria A

General Specifications

Relative Humidity			95% max. (non condensing)
Temperature Ranges	- Operating Temperature		–40°C to +85°C
	- Approved Ambient Temp.		+65°C max. (for compliance to 60950-1)
	- Case Temperature		+95°C max.
	- Storage Temperature		–50°C to +125°C
Power Derating	- High Temperature		4.5 %/K above 73°C (average)
		See application note:	www.tracopower.com/overview/tmdc40
Cooling System			Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote		On: 3.5 to 12 VDC or open circuit
			Off: 0 to 1.2 VDC or short circuit
			Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current		3 mA typ.
	- Remote Pin Input Current		-0.5 to 0.5 mA
Altitude During Operation			6'000 m max.
Switching Frequency			285 kHz typ. (PWM)
Insulation System			Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s		2'500 VDC
Isolation Resistance	- Input to Output, 500 VDC		1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V		2'400 pF max.
Reliability	- Calculated MTBF		644'300 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration		IEC 60068-2-6
Housing Material			Plastic resin (UL 94 V-0 rated)
Potting Material			Silicone (UL 94 V-0 rated)
Housing Type			Plastic Case
Mounting Type			Chassis Mount
Connection Type			Screw Terminal
Weight			162 g
Thermal Impedance	- Case to Ambient		4.75 K/W typ.
Environmental Compliance	- REACH Declaration		www.tracopower.com/info/reach-declaration.pdf
			REACH SVHC list compliant
			REACH Annex XVII compliant
	- RoHS Declaration		www.tracopower.com/info/rohs-declaration.pdf
			Exemptions: 6c, 7c-I
			(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number		79c56f45-780c-49a4-92e6-91bca3c9dcf8


Supporting Documents

Overview Link (for additional Documents)	www.tracopower.com/overview/tmdc40

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

chanhvinh.com

Outline Dimensions

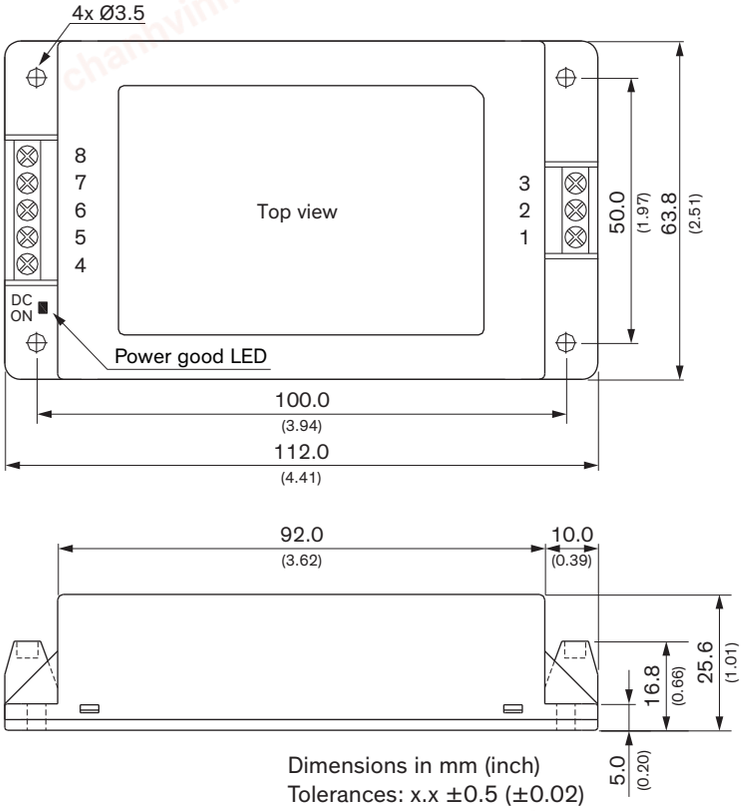

Dimensions in mm (inch)
Tolerances: x.x ±0.5 (±0.02)

Pinout	
Pin*	**Function**
1	Remote
2	–Vin (GND)
3	+Vin (Vcc)
4	+Vout
5	NC
6	–Vout
7	NC
8	NC

NC: Not connected
* Wires 1.5 mm² max.

© Copyright 2023 Traco Electronic AG Specifications can be changed without notice.