chanhvinh.com

TRACO POWER

Non-Isolated DC/DC Converter (POL)

TSR 3 Series, 3 A

- **High performance 3 Amp. switching regulator**
- **Suitable for positive & negative output circuit**
- **High efficiency up to 95 %**
- **Adjustable output voltages**
- **Wide input voltage ranges 2.5–5.5, 4.5–14 and 10–30 VDC**
- **Short circuit protection**
- **Remote On/Off input**
- **Low output ripple & noise**
- **3-year product warranty**



The TSR 3 models are non isolated step down switching regulators. Since production May 2013 they can also be operated with negative output voltage.
They come in a very compact open frame package of 15.5 x 9.4 x 6.2mm. The high efficiency of up to 95% admits a full load operation up to 50°C and up to 85°C with 50% current reduction. A low standby current, a very wider input range and no requirement for heatsink give these switching regulators a significant advantage over linear regulators.
Togther with a remote On/Off input and protection against short circuit the TSR 3 Series models are ideal point of load regulators for high reliable and energy critical applications.

Models

Order Code	Output Current max.	Input Voltage Range	Output Voltage nom. (adjustable)	Efficiency typ.
TSR 3-0533	3'000 mA	2.5 - 5.5 VDC (5 VDC nom.)	0.6 VDC (0.6 - 3.3 VDC)	95 % (at 2.5 Vout)
TSR 3-1250		4.5 - 14 VDC (12 VDC nom.)	0.6 VDC (0.6 - 6.0 VDC)	93 % (at 3.3 Vout)
TSR 3-2450		10 - 30 VDC (24 VDC nom.)	3 VDC (3.0 - 6.0 VDC)	91 % (at 5.0 Vout)
TSR 3-24150			5 VDC (5.0 - 15.0 VDC)	95 % (at 12 Vout)

Options

Suffix A	- Optional models with angular pins (see outline dimensions)

Note - TSR 3-1250: max. 9 Vin if Vout <0.9 VDC
- For external circuit proposal for negative output voltage, refer to application note

chanhvinh.com

Input Specifications

Input Current	- At no load	5 Vin models:	**20 mA typ.**
		12 Vin models:	**25 mA typ.**
		24 Vin models:	**25 mA typ.** (3 Vout model)
			30 mA typ. (5 Vout model)
			(at Vin nom.)
	- At full load	5 Vin models:	**3'000 mA max.**
		12 Vin models:	**2'600 mA max.**
		24 Vin models:	**2'200 mA max.** (3 Vout model)
			3'000 mA max. (5 Vout model)
			(at Vin min.)
Reflected Ripple Current			**30 mAp-p typ.**
			(24 Vin models: Ext. filter, see application note)
Recommended Input Fuse		5 Vin models:	**5'000 mA** (slow blow)
		12 Vin models:	**5'000 mA** (slow blow)
		24 Vin models:	**5'000 mA** (slow blow)
			(The need of an external fuse has to be assessed in the final application.)
Input Filter			Internal Capacitor

Output Specifications

Output Voltage Adjustment		0.6 Vout models:	**0.6 - 3.3 VDC**
			0.6 - 6.0 VDC
		3 Vout models:	**3.0 - 6.0 VDC**
		5 Vout models:	**5.0 - 15.0 VDC**
			(By external trim resistor)
		See application note:	www.tracopower.com/overview/tsr3
			(TSR 3-0533: Vin at least 0.5 V higher than Vout TSR 3-1250: Vin at least 2 V higher than Vout TSR 3-24150: Vin at least 3 V higher than Vout)
Voltage Set Accuracy			**±2% max.**
Regulation	- Input Variation (Vmin - Vmax)		**0.2% max.** (Vout >2.5 VDC)
			5 mV typ. (Vout <2.5 VDC)
	- Load Variation (10 - 90%)		**0.8% max.** (Vout >2.5 VDC)
			15 mV typ. (Vout <2.5 VDC)
Ripple and Noise (20 MHz Bandwidth)		5 Vin models:	**50 mVp-p typ.**
		12 Vin models:	**50 mVp-p typ.**
		3 Vout models:	**75 mVp-p typ.**
		5 Vout models:	**150 mVp-p typ.**
Capacitive Load		0.6 Vout models:	**1'000 µF max.**
		3 Vout models:	**1'000 µF max.**
		5 Vout models:	**500 µF max.**
			(ESR >1 mOhm)
Minimum Load			Not required
Temperature Coefficient			**±0.02 %/K max.**
Start-up Overshoot Voltage			**1% max.**
Short Circuit Protection			Continuous, Automatic recovery
Output Current Limitation			**280% typ. of Iout max.**
			(5 Vin models)
			220% typ. of Iout max. (other models)
Transient Response	- Peak Variation		**250 mV typ. / 500 mV max.** (50% Load Step)
			(5.0 Vout model)
			150 mV typ. / 250 mV max. (50% Load Step)
			(other models)
	- Response Time		**120 µs typ. / 220 µs max.** (50% Load Step)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

chanhvinh.com

General Specifications

Relative Humidity			95% max. (non condensing)
Temperature Ranges	- Operating Temperature		–40°C to +85°C
	- Storage Temperature		–55°C to +125°C
Power Derating	- High Temperature		Depending on model
		See application note:	www.tracopower.com/overview/tsr3
Cooling System			Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote		On: 1 to 12 VDC or open circuit Off: 0 to 0.3 VDC Refers to 'Remote' and 'GND' Pin
	- Off Idle Input Current		1.5 mA typ. (0.6 Vout models) 6 mA typ. (other models) (5 Vin model: 5.5 V or open circuit for On-state)
Switching Frequency			540 - 660 kHz (PWM) (5 Vin & 12 Vin models) 270 - 330 kHz (PWM) (24 Vin models)
Insulation System			Non-isolated
Reliability	- Calculated MTBF		4'500'000 h (MIL-HDBK-217F, ground benign)
Washing Process			According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Thermal Shock		MIL-STD-810F
Pin Material			Copper
Pin Foundation Plating			Nickel (3 - 5 µm)
Pin Surface Plating			Gold (50 - 75 nm), matte
Housing Type			Open Frame
Mounting Type			PCB Mount
Connection Type			THD (Through-Hole Device)
Footprint Type			SIP5
Weight		5 Vin models:	1.7 g
		12 Vin models:	1.7 g
		24 Vin models:	2.1 g
Environmental Compliance	- REACH Declaration		www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration		www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.)

Supporting Documents

Weight


Overview Link (for additional Documents)	www.tracopower.com/overview/tsr3

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

chanhvinh.com

Outline Dimensions

Standard version

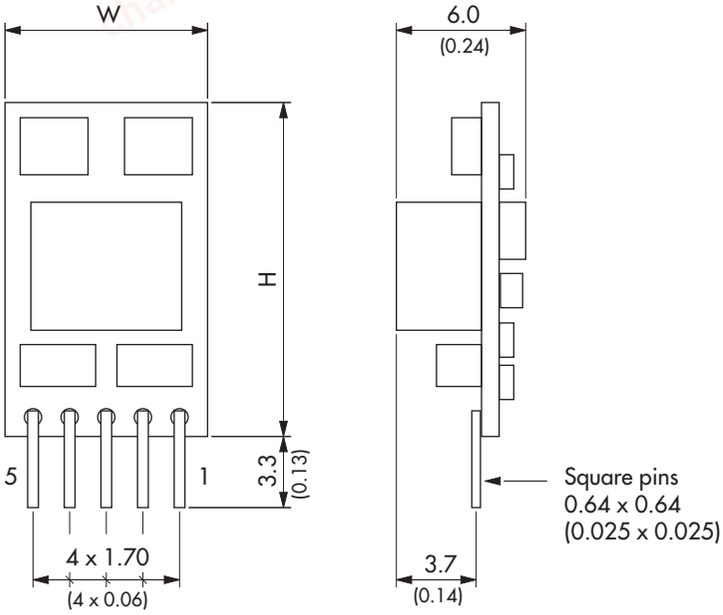

Pinout		
Pin	**positive**	**negative**
1	Remote On/Off	
2	+Vin (Vcc)	
3	GND	–Vout
4	+Vout	GND
5	Trim	


TSR 3-0533 & TSR 3-1250: W=9.4 (0.37) H=15.5 (0.61)
TSR 3-2450 & TSR 3-24150: W=10.4 (0.41) H=16.5 (0.65)

(Component allocation is model specific)

Dimensions in mm (inch)
Tolerances: ±0.5 (±0.02)
Pin pitch Tolerance ±0.25 (±0.01)
Pin profile Tolerance ±0.1 (±0.004)

chanhvinh.com

Optional version with angular pins (Suffix A)

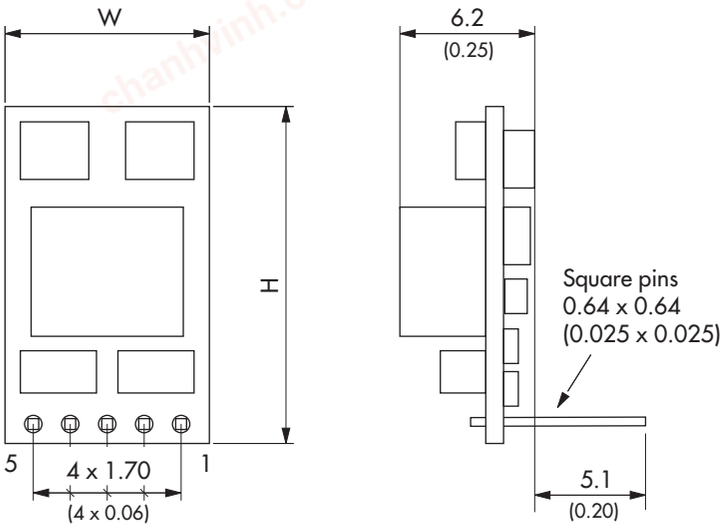

Pinout		
Pin	**positive**	**negative**
1	Remote On/Off	
2	+Vin (Vcc)	
3	GND	–Vout
4	+Vout	GND
5	Trim	

TSR 3-0533 & TSR 3-1250: W=9.4 (0.37) H=15.5 (0.61)
TSR 3-2450 & TSR 3-24150: W=10.4 (0.41) H=16.5 (0.65)

(Component allocation is model specific)

Dimensions in mm (inch)
Tolerances: ±0.5 (±0.02)
Pin pitch Tolerance ±0.25 (±0.01)
Pin profile Tolerance ±0.1 (±0.004)

© Copyright 2023 Traco Electronic AG Specifications can be changed without notice.