
chanhvinh.com

Mounting accessories
BTS-DSU35-EBE3

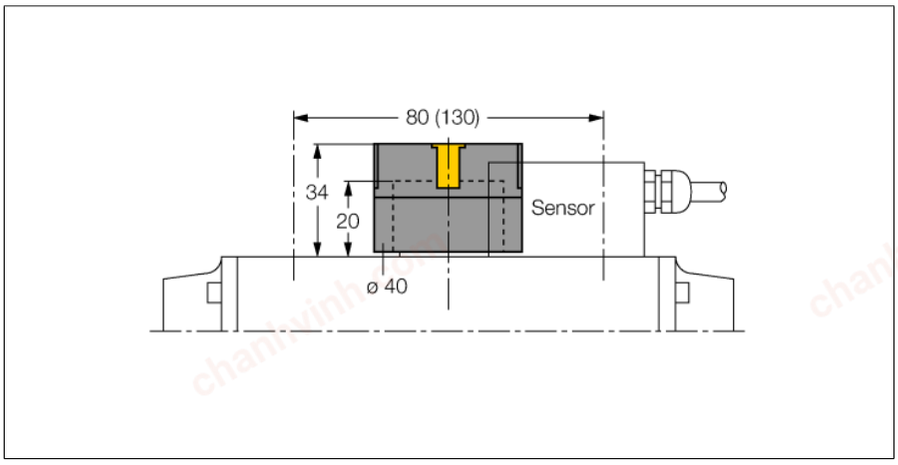


- **Actuation kit (puck)**
- **End position damped**
- **6.2 mm stainless steel target to compensate larger tolerances (e.g. caused by rubber seals)**
- **End position (open/closed) freely adjustable 360 °, in steps of 4°**
- **Displays rotatable by 90°**
- **Scale division**
- **Hole pattern on flange face 30 x 80 mm (30 x 130 mm); connection shaft (shaft peg) height 20 mm / max. Ø 30 mm**
- **Mounting screws for sensor and actuator included in delivery**
- **Slide ring, max. Ø 34 mm**

Type code	BTS-DSU35-EBE3
Ident no.	6901070
Design	accessories for dual sensors, Ni4-DSU35…
Housing material	plastic, ABS
Tightening torque	1.5 Nm
Included in scope of supply	2x cylinder screw M5x12 (DIN 912-A2) 2x lock washers A5 (DIN 137A2) 1x countersunk screw M6x25 (DIN 7991-A2)

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.



Edition • 2014-05-16T18:31:52+02:00