chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

0805 SMD TYPE LED

VAOL-S8WR4


Features


- Fit automatic placement equipment.
- Fit Compatible with infrared and vapor phase reflow solder process.
- Pb-free.
- RoHS compliant.


Descriptions

- For higher packing density .
- For minature applications .
- Yellow Diffusion Lens .
- Chip material : InGaN .
- Emitting color : White .


Package Outline Dimensions

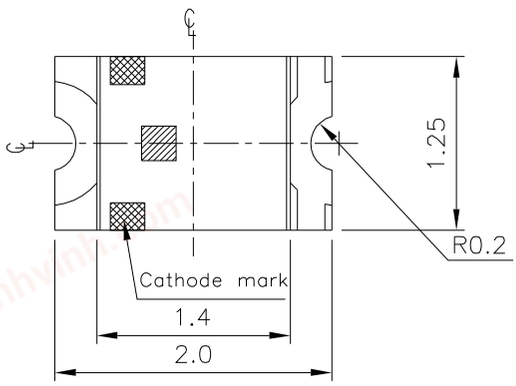




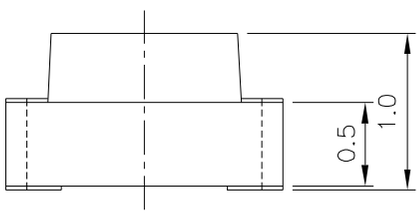

For reflow soldering (Propose)

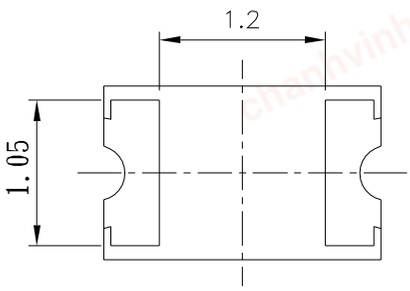

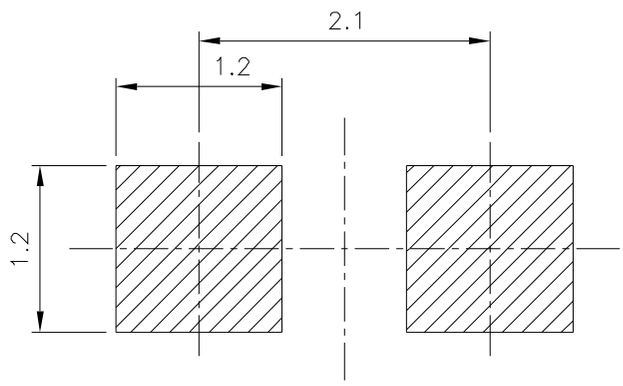

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm

www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301

RoHS
ISO 9001 Registered

chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_F	25	mA
Operating Temperature	Topr	-40 ~ +85	℃
Storage Temperature	Tstg	-40 ~ +90	℃
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Soldering Temperature	Tsol	Reflow Soldering : 260 ℃ for 10 sec Hand Soldering : 350 ℃ for 3 sec.	

Electro-Optical Characteristics (Ta=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_V	28.5	-----	72.0	mcd	I_F=5mA
Viewing Angle	2θ 1/2	-----	150	-----	deg	
Forward Voltage	V_F	2.70	-----	3.15	V	
Reverse Current	I_R	-----	-----	50	μA	V_R=5V

Bin Range Of Luminous Intensity & Forward Voltage

Symbol	Bin Code	Min.	Max.	Unit	Condition
I_V	N	28.5	45.0	mcd	I_F=5mA
	P	45.0	72.0		
V_F	15	2.70	2.85	V	
	16	2.85	3.00		
	17	3.00	3.15		

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Forward Voltage ±0.1V

www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301
RoHS
ISO 9001 Registered

chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

Chromaticity Coordinates Specifications for Bin Grading

Groups	Bin Code	CIE_x	CIE_y	Condition
A	1	0.274	0.226	I_F=5mA
		0.274	0.258	
		0.294	0.286	
		0.294	0.254	
	2	0.274	0.258	
		0.274	0.291	
		0.294	0.319	
		0.294	0.286	
	3	0.294	0.254	
		0.294	0.286	
		0.314	0.315	
		0.314	0.282	
	4	0.294	0.286	
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	
	5	0.314	0.282	
		0.314	0.315	
		0.334	0.343	
		0.334	0.311	
	6	0.314	0.315	
		0.314	0.347	
		0.334	0.376	
		0.334	0.343	


www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301

RoHS
ISO 9001 Registered

chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

CIE Chromaticity Diagram

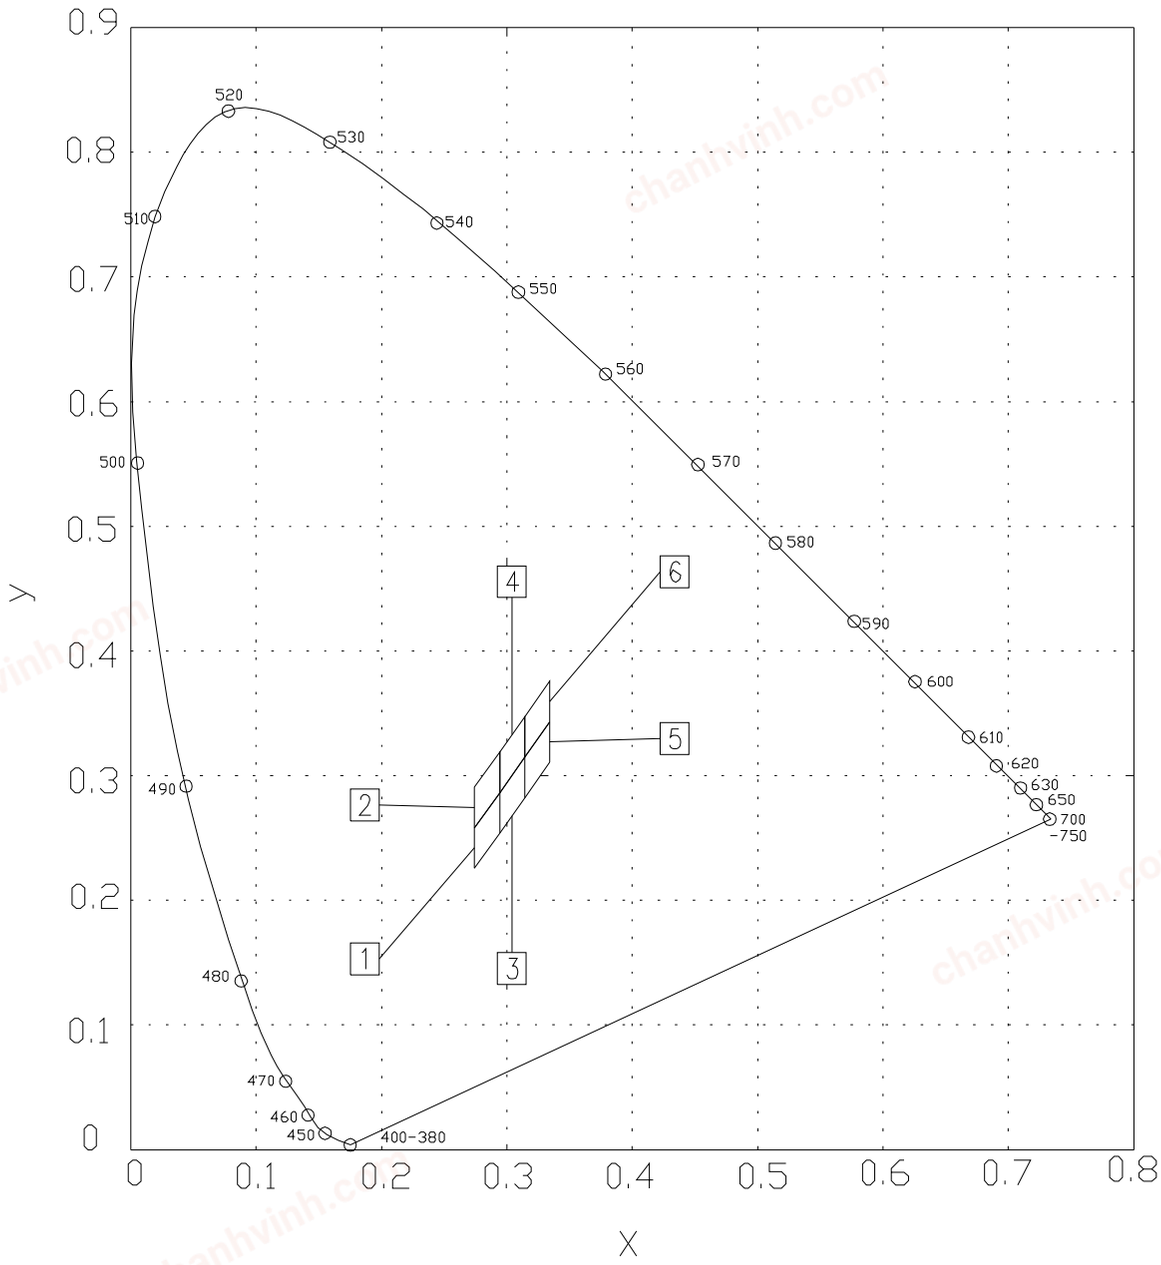

Specific binning requirements- please contact our home office


www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301


RoHS
ISO 9001 Registered


chanhvinh.com


VCC | OPTOELECTRONICS
lighting:theway


Typical Electro-Optical Characteristics Curves

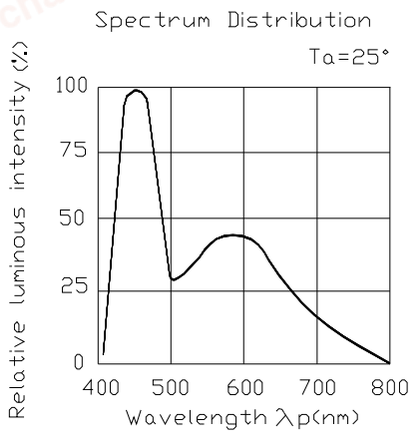


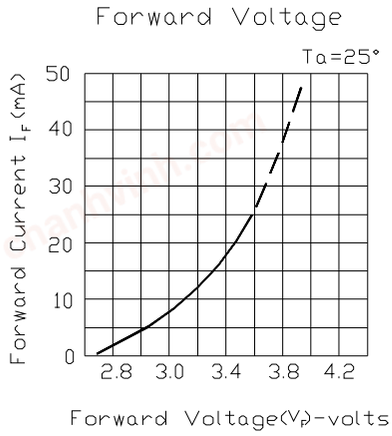

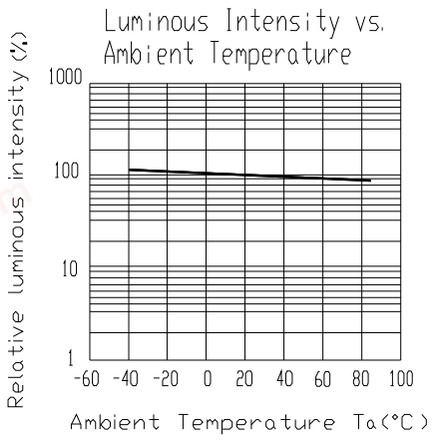

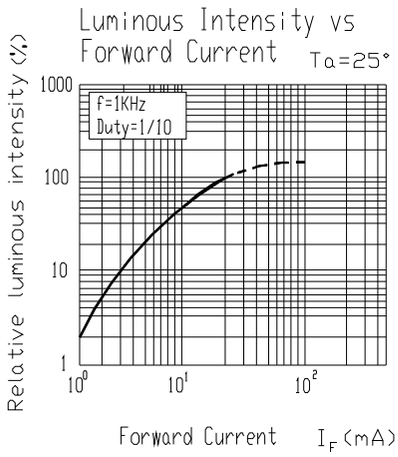

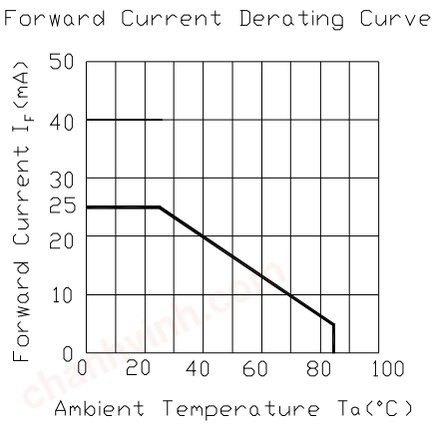

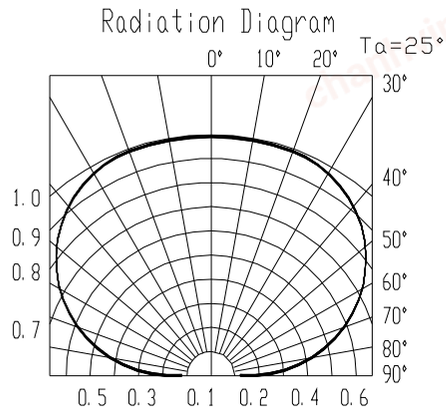


www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301
RoHS
ISO 9001
Registered

chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

Reel Dimensions

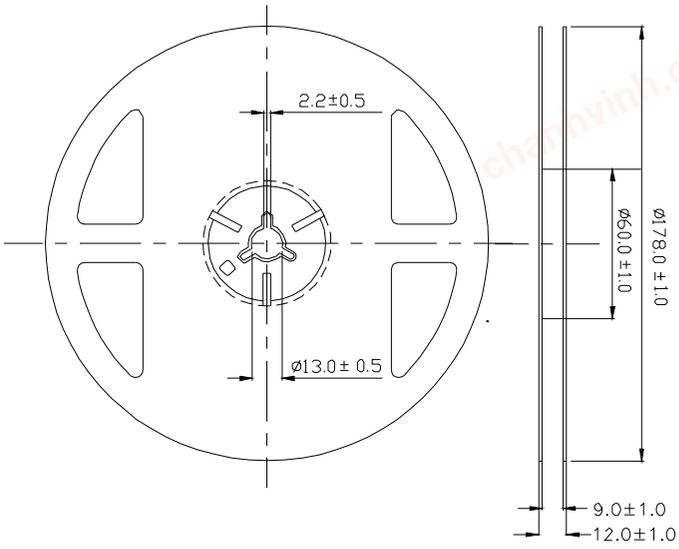

Note: The tolerances unless mentioned is ±0.1mm ,Unit = mm


www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301

RoHS
ISO 9001 Registered

chanhvinh.com


VCC | OPTOELECTRONICS
lighting:theway

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

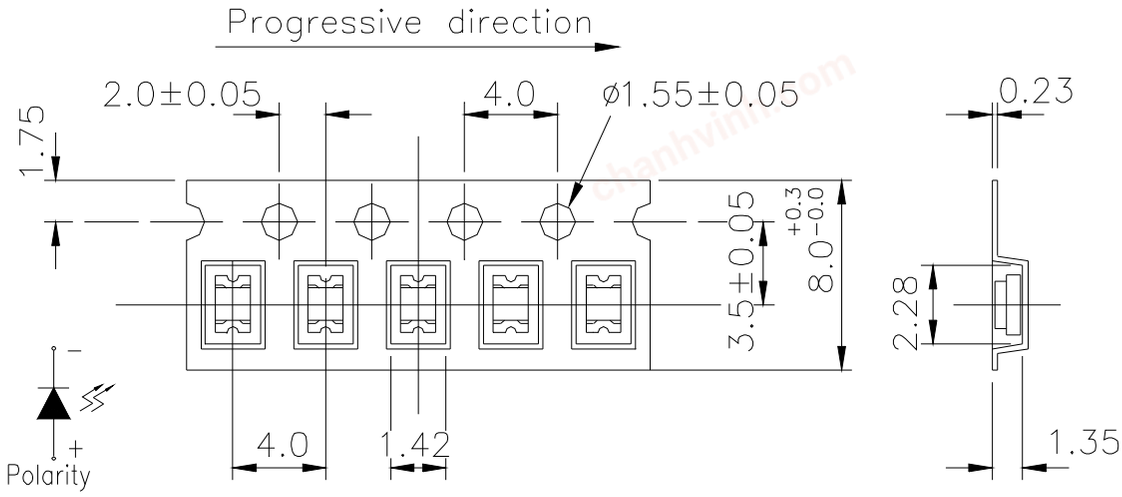

Note: The tolerances unless mentioned is ±0.1mm, Unit = mm

Moisture Resistant Packaging

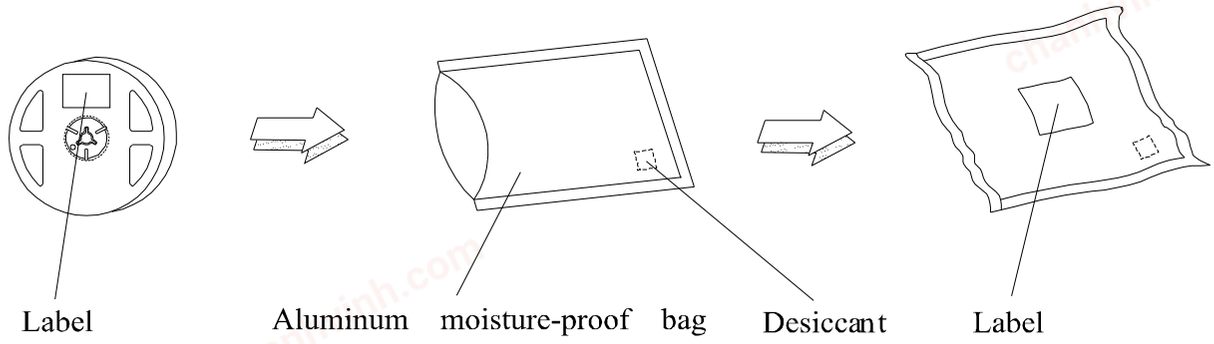


www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301
RoHS
ISO 9001 Registered

chanhvinh.com

VCC | OPTOELECTRONICS
lighting:theway

Soldering Condition

1.Pb-free solder temperature profile

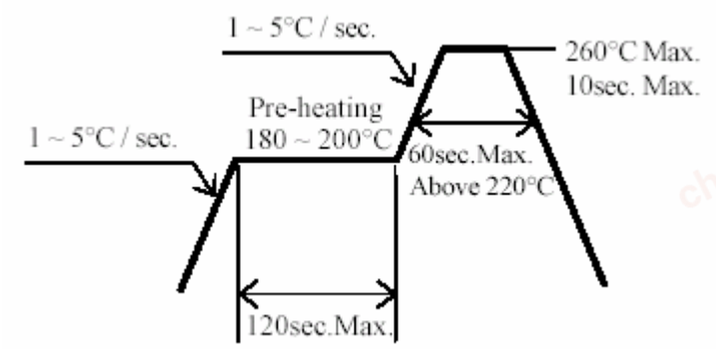

2.Reflow soldering should not be done more than two times.

3 When soldering, do not put stress on the LEDs during heating.

4 After soldering, do not warp the circuit board.

Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

www.vcclite.com
190 bosstick blvd, ste 101
san marcos, ca 92069
phone 760.560.1300
fax 760.560.1301
RoHS
ISO 9001 Registered