

chanhvinh.com

WISKA COMBI 308



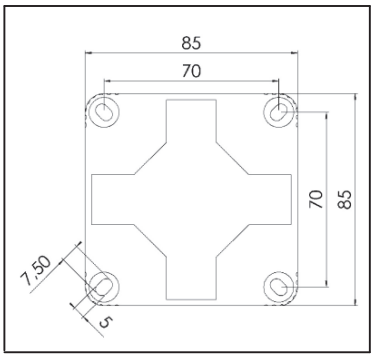

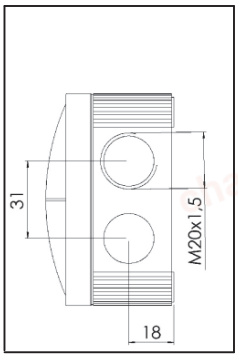

Protection class to EN 60 529:	IP 66
Flame protection:	Glow wire test 750 C acc. to EN 60695-2-11
Temperatures during installation:	-5°C to 60°C
Temperature range of material:	-30°C to 100°C, intermittent up to approx. 120°C
Voltage:	400 V
Material:	Polypropylene, reinforced glass fibre; Sealing: thermoplastic elastomere
Terminals/poles:	4 mm²
Fixing:	With mounting clip or 4 internal openings outside of the sealing area
Equipment:	8 elastic self-sealing membranes for cable entry without mechanical devices - 8 integrated M 20 threads, no locknuts necessary - 4 captive quick-release lid screws - Incl. mounting clip for snap-on fixing - Colour RAL 7035 light grey - .../S = black - .../W = white

Accessories:

- DIN RAIL KIT 108, 308: Rail TS 15 + Fixing material, WISKA-No. 10060362
- EC 308 Earthing plate: WISKA No. 10101473

Type	WISKA-No.		mm		L x B x H external / außen mm
COMBI 308/5	10060401	5/100	3 - 12		85 x 85 x 51
COMBI 308/5/S	10060580	5/100	3 - 12		85 x 85 x 51
COMBI 308/5/W	10060611	5/100	3 - 12		85 x 85 x 51
DIN RAIL KIT 308	10060362	1			