chanhvinh.com

Crystal Clock Oscillator Specification

IQD Part No. + Packaging: LFSPXO082201Reel

Wurth Part No. ***830208220101***

Description

- Standard 2.5 x 2.0 oscillator in a ceramic package with a hermetically sealed metal lid.
- Model IQXO-791
- Model Issue number 2

Frequency Parameters

- Frequency 12.2880MHz
- Frequency Stability ±25.00ppm
- Operating Temperature Range -20.00 to 70.00°C
- Ageing ±3ppm max per year @ 25°C

Electrical Parameters

- Supply Voltage 3.3V ±10%
- Current Draw 7.000mA

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF
- Rise and Fall Time 7.0ns max
- Duty Cycle 40/60%
- Output Voltage Levels:
  Output Low (VoL): 10%Vs max
  Output High (VoH): 90%Vs min
- Start Up Time: 10ms max
  0.7ms typ to 90% of final amplitude (under ideal conditions @ 25°C)

Output Control

- Enable/Disable:
  Logic '1' (≥70% Vs) to pad 1 enables oscillator output.
  Logic '0' (≤30% Vs) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state.
  No connection to pad 1 enables oscillator output.
- Stand-by Current: 10µA max, 1.0µA typ @ 25°C

Noise Parameters


- Period Jitter (pk-pk): ±80ps typ
- Period Jitter (1σ): ±10ps typ
- Phase Jitter (12kHz to 20MHz): 1ps rms max

Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Mechanical Shock: MIL-STD-883, Method 2002, Condition B (or comparable).
- Vibration: MIL-STD-883, Method 2007, Condition A (or comparable).

Manufacturing Details

- Note: Do not connect inductor or bead between pad 2 and GND as it can make the output unstable.
- RoHS Terminations
- RoHS Reflow Temp 260°C max for 10secs max

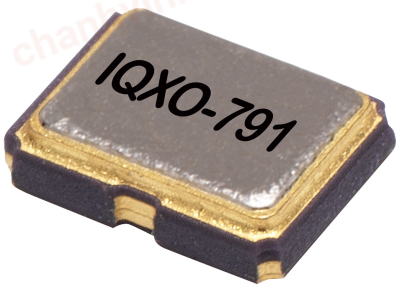

Outline (mm)

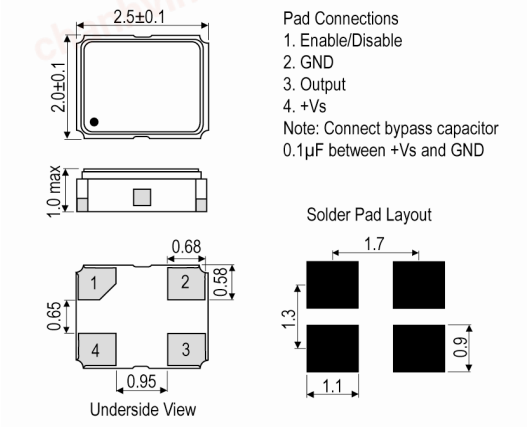

CONTACT INFORMATION:
Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1, 74638 Waldenburg, Germany
Tel: +49(0) 7942 945-0

Email: eiSos@we-online.de
Web: www.we-online.com

chanhvinh.com

Crystal Clock Oscillator Specification

IQD Part No. + Packaging: LFSPXO082201Reel
Wurth Part No. ***830208220101***

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACh Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481D
  Pack Size: 3,000
- *Alternative packing option available*

U S E F U L L I N K S

Toolbox:
www.we-online.com/toolbox

Product Catalog:
www.we-online.com/products

CONTACT INFORMATION:
Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1, 74638 Waldenburg, Germany
Tel: +49(0) 7942 945-0

Email: eiSos@we-online.de
Web: www.we-online.com