chanhvinh.com

# RJ45 Lock-In Device

**Part Number(s): PSL-DCPLE(-C),PSL-DCPLRE(-C),PSL-DCPLSE,PSL-DCPLE-**(-C),PSL-DCPLRE-**(-C)**

© Panduit Corp. 2020

**INSTALLATION INSTRUCTIONS** **B20241**

## Installing Lock-In Device Onto RJ45 Plug:


1. Align white line on tool with white line on device.
2. Insert tool into device and rotate tool clockwise 90°. Push plug into device until it snaps into place. Check that the plug is fully seated in the device.
3. Rotate tool counter-clockwise 90° and remove tool from device.



Step 1



Step 2



Step 3

## Installing RJ45 Plug Into Jack:

Insert plug into jack until plug locks into place. Lightly pull to confirm plug is in place.









## Removing RJ45 Plug From Jack:

1. Align white line on tool with white line on device.
2. Insert tool into device and rotate tool clockwise 180°.
3. Remove plug from jack.
4. Rotate tool counter-clockwise 180° and remove tool from device.

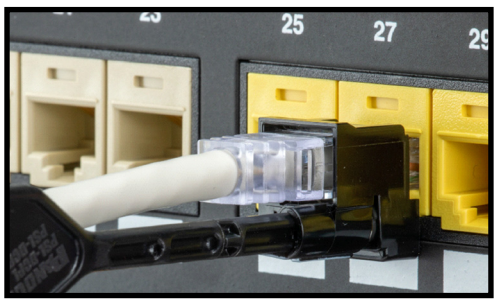


## Removing Lock-In Device From RJ45 Plug:

1. Align white line on tool with white line on device.
2. Insert tool into device and rotate tool clockwise 90°.
3. Use a screwdriver or fingernail to release tab on bottom of device. While holding release tab, push plug out of the device.
4. Rotate tool counter-clockwise 90° and remove tool from device.

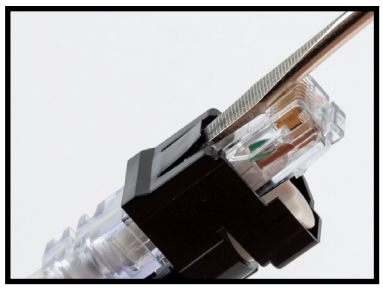

**For Instructions in Local Languages and Technical Support:**
www.panduit.com/resources/install_maintain.asp

www.panduit.com

**E-mail:**
techsupport@panduit.com

**Phone:**
866-405-6654