
chanhvinh.com

Inclination sensors

1-dimensional, measuring range 0...360°

Analog

GIM140R - 1-dimensional, analog

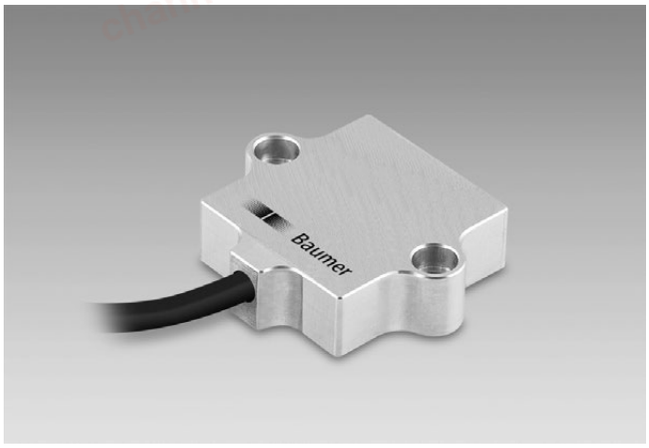

GIM140R

Features

- **Size 48 mm**
- **Interface Analog**
- **MEMS capacitive measuring principle**
- **Measuring range 1-dimensional: 0...360°**
- **Aluminium housing**
- **Protection IP 67/IP 69K**
- **Connection cable**
- **Teach input for adjustment of zero position**

Optional

- **Analog output with out-of-range diagnostic**

Technical data - electrical ratings

Voltage supply	8...30 VDC 12...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes
Consumption typ.	8 mA (24 VDC, w/o load, voltage output) 12 mA (w/o load, current output)
Interface	Analog (4...20 mA / 0.5...4.5 V / 0...10 V)
Load resistor	Between Out/0 V ≥3 kΩ / voltage output 270 Ω at 10 VDC (500 Ω at 15 VDC) / current output
Measuring range	0...30°, 0...60°, 0...90°, 0...120°, 0...180°, 0...270°, 0...360°
Resolution	0.2 °
Accuracy (+25 °C)	±0.4°
Sensing method	MEMS technology
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Programmable parameters	Preset
Diagnostic function	Out-of-range diagnostics

Technical data - mechanical design

Dimensions W x H x L	48 x 14 x 45 mm
Protection DIN EN 60529	IP 67/IP 69K
Material	Housing: aluminium, anodised
Corrosion protection	ISO 9227:2017 salt mist according to ISO 12944-6:1998 C5-M (CX)
Operating temperature	-40...+85 °C
Resistance	DIN EN 60068-2-6 Vibration 10 g, 10-2000 Hz DIN EN 60068-2-27 Shock 50 g, 11 ms
Weight approx.	50 g
Connection	Cable 0.3 m, radial

Subject to modification in technic and design. Errors and omissions excepted.

chanhvinh.com

Inclination sensors

1-dimensional, measuring range 0...360°

Analog

GIM140R - 1-dimensional, analog

Part number

GIM140R-	M	1		.	K		.A	

Option
- Without option
- /4822 Output signal with out-of-range diagnostics

Voltage supply / interface
- V3 8...30 VDC / Analog 0.5...4.5 VDC
- V6 12...30 VDC / Analog 0...10 VDC
- C0 12...30 VDC / Analog 4...20 mA

Connection
- K Cable 0.3 m, Standard 5x0.5 mm²

Measuring range
- 030 0...30°
- 060 0...60°
- 090 0...90°
- 120 0...120°
- 180 0...180°
- 270 0...270°
- 360 0...360°

Number of axes
- 1 1-dimensional

Housing
- M Metal

Subject to modification in technic and design. Errors and omissions excepted.
16/8/2019

chanhvinh.com


Inclination sensors

1-dimensional, measuring range 0...360°

Analog

GIM140R - 1-dimensional, analog

Installation position



The 1-dimensional inclination sensor must be installed with its x-axis in line with the force of gravity, as illustrated below.

The 1-dimensional sensor default position is 0° as shown in the following illustration.

Z = 0°



Z = +90°



Z = +180°



Z = +270°



Terminal assignment

Cable

Core color	Signal	Description
White	0 V	Ground relating to +Vs
Brown	+Vs	Voltage supply
Green	Out	Output
Yellow	n.c.	Do not use
Grey	Teach	Teach-input

Cable data: 5 x 0.5 mm²

Teach process

The teach-in function enables rapid and easy commissioning in the field.

Setting zero

- Get inclination sensor on position intended for zero position.
- Set teach input for 5 < t < 10 seconds on high level.

Trigger level

Teach-input

High level	>2.1 V
Low level	<1 V
Maximum	+Vs

Subject to modification in technic and design. Errors and omissions excepted.

chanhvinh.com

Inclination sensors

1-dimensional, measuring range 0...360°


Analog


GIM140R - 1-dimensional, analog

Output signals


Analog output


Measuring range 0...90°

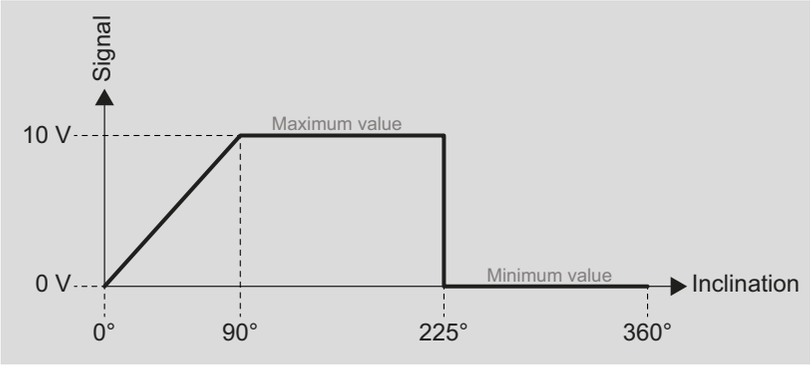

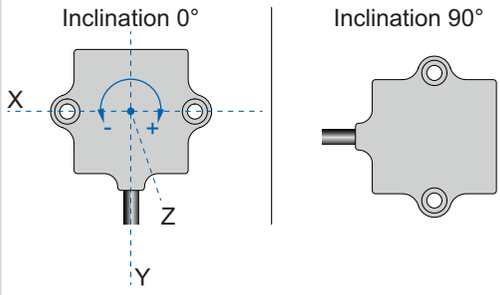



Measuring range 0...180°

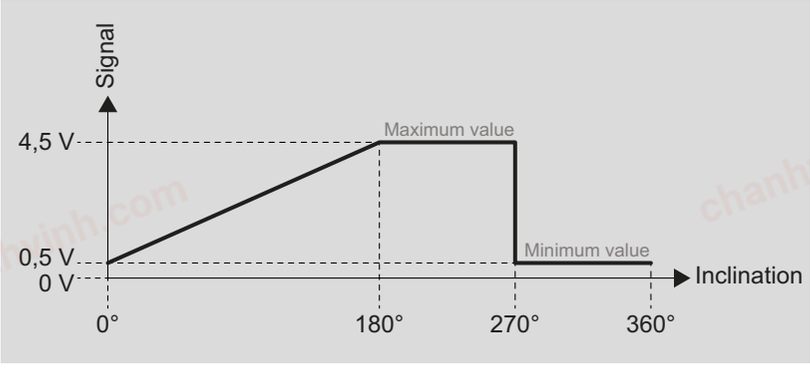

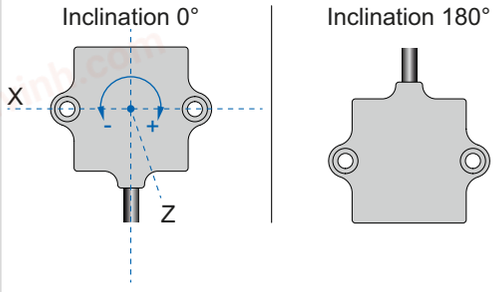

Measuring range 0...270°

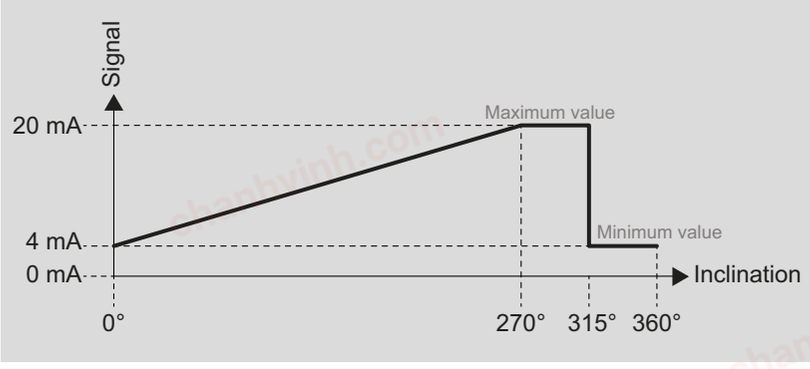

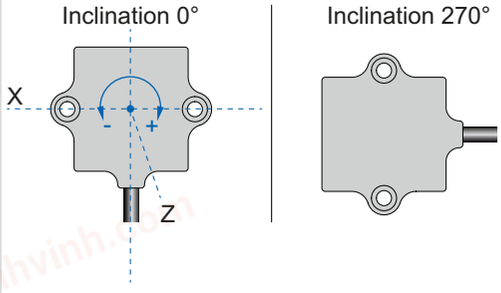

Subject to modification in technic and design. Errors and omissions excepted.

chanhvinh.com

Inclination sensors

1-dimensional, measuring range 0...360°


Analog


GIM140R - 1-dimensional, analog

Output signals


Analog output with out-of-range diagnostic


Measuring range 0...90°

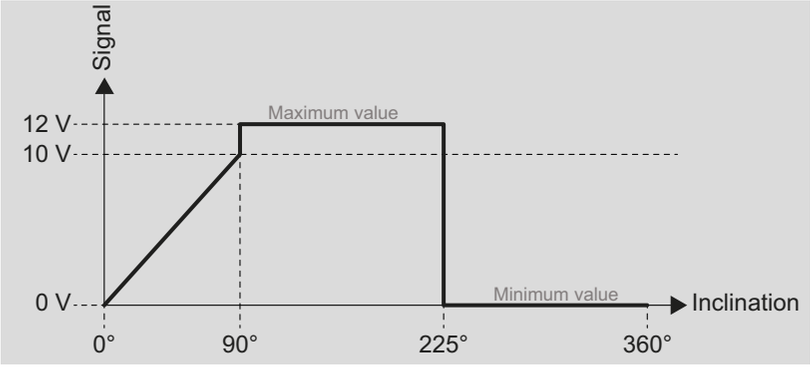

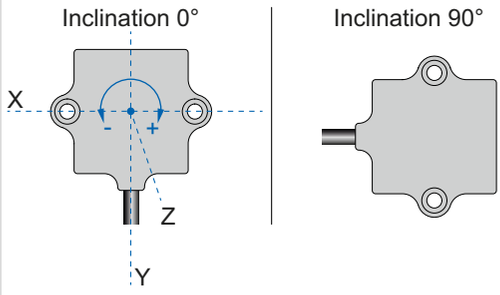



Measuring range 0...180°

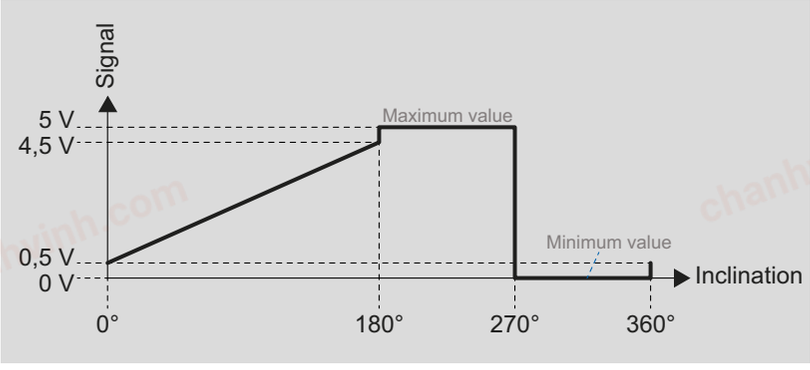

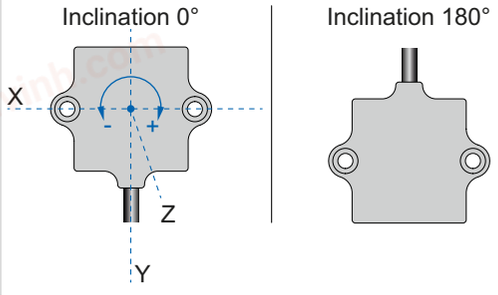

Measuring range 0...270°

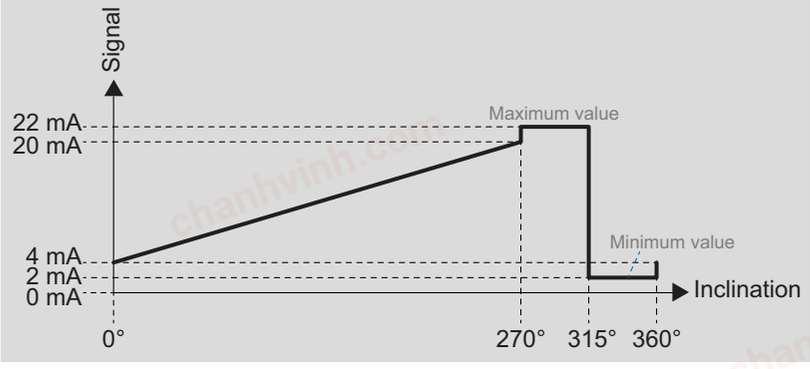

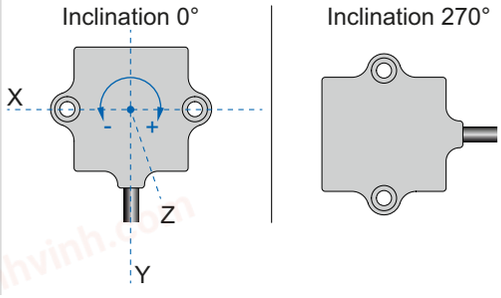

Subject to modification in technic and design. Errors and omissions excepted.

chanhvinh.com


Inclination sensors


1-dimensional, measuring range 0...360°

Analog


GIM140R - 1-dimensional, analog

Dimensions

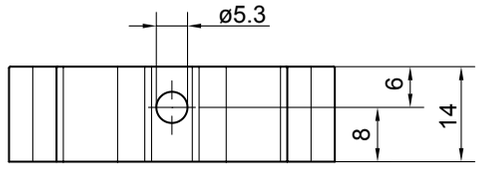

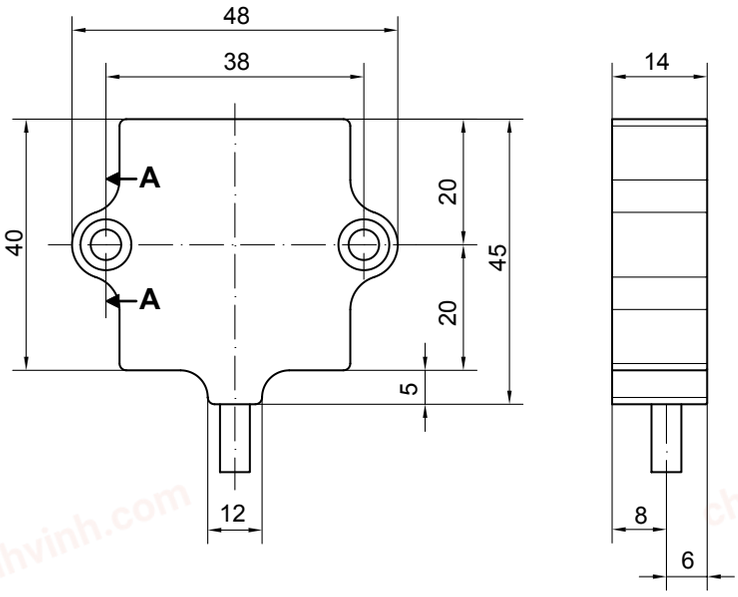

A-A



chanhvinh.com

Subject to modification in technic and design. Errors and omissions excepted.