
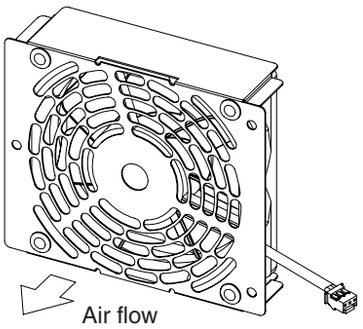
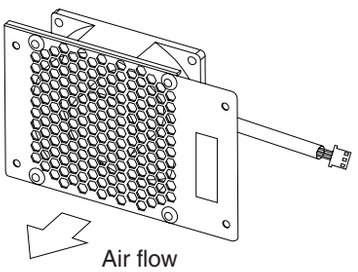
chanhvinh.com

Fan Unit

■ Index

Part number Power supply model	**300-FAN-01** HWS300		● Power cable connector Housing = PAP-03-S (J.S.T.) Contact = SPHD-001T-P0.5 or SPHD-002T-P0.5 (J.S.T.) Pin No. / Description: 1 Power; 2 Fan alarm; 3 GND Length of fan harness = 55±10mm
Part number Power supply model	**600-FAN-01** HWS600		● Power cable connector Housing = PAP-03-S (J.S.T.) Contact = SPHD-001T-P0.5 or SPHD-002T-P0.5 (J.S.T.) Pin No. / Description: 1 Power; 2 Fan alarm; 3 GND Length of fan harness = 70±10mm
Part number Power supply model	**1500-FAN-01** HWS1000 HWS1500 HWS1800T		● Power cable connector Housing = XHP-3 (J.S.T.) Contact = 8XH-001T-P0.6 (J.S.T.) Pin No. / Description: 1 Power; 2 Fan alarm; 3 GND Length of fan harness = 65±10mm

Please contact our company for fan replacement and it is at customer expenses.
Be sure following notice, if the customer try to replace this fan unit on your own.
Pay attention to all cautions and warnings before using this product.

1. Please avoid from dropping, applying shock to the fan.
2. Fan replacement on an operating equipment is strictly prohibited.
3. Make sure that there are no loose connectors, and no scissors for the harness, etc.
4. Please be aware that fan replacement perform by customer compromises product safety standard. (UL, CE etc.)

chanhvinh.com

・All specifications are subject to change without notice.