chanhvinh.com

Stud Adapter and Socket for wood • Ø6 mm, fixed position

EH 22330.





Product Description

By using a stud adapter, slings with sling swivels with bolt can be used with the PUSH & GO system. To do this, the stud adapter is unlocked with the enclosed Allen key and latched into the socket. The sling swivels with bolt are then latched into the stud adapter. Furthermore stud adapters can be used to attach bipods to the gun, e.g. from Harris.

Material

Pin part
- Stainless steel 1.4542, black

Bushing
- Stainless steel 1.4305, black

Spring
- Stainless steel

Assembly

Easily mounted by an experienced gunsmith in only 30 minutes!
Installation instructions for wood:
1. Drill locating hole and pilot hole for locking screw according to specifications.
2. The use of adhesive for securing is recommended.
3. Press socket in locating hole.
4. Secure socket with screw.

Drawing

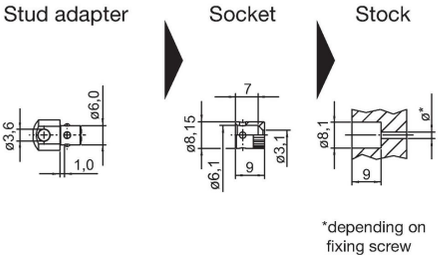

*depending on fixing screw

Order information

Nominal diameter [mm]	Location hole: Bore Hole Ø [mm]	Location hole: depth of bore hole [mm]	Load capacity for static load max. [kN]	Art. No.
6	8.1	9	1.2	22330.0586

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.