chanhvinh.com

Support Legs • protected against slipping

EH 22593.



Product Description

The support legs are universally usable as adjustable legs.
In this version with a rubber cap, sensitive support surfaces are protected, and slipping is prevented.
The plate is screwed to the threaded pin and nut by a stainless steel fastening screw, and is also glued.

Material

Grub Screw
- Steel, zinc-plated by galvanization, passivated
- Stainless steel 1.4305

Rubber cap
- Rubber, black

Nut
- Steel, zinc-plated by galvanization, passivated
- Stainless steel 1.4305

Lock nut
- Steel, zinc-coated by galvanisation, passivated, ISO 4032
- Stainless Steel A2, ISO 4032


Pad
- Steel, zinc-plated by galvanization, passivated
- Stainless steel 1.4301, vibratory ground

More information


Further products

- Support Legs


Drawing

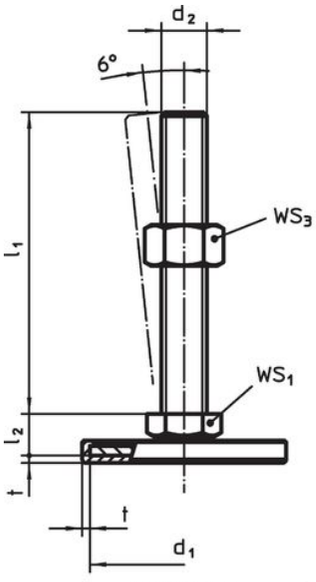

picture 1

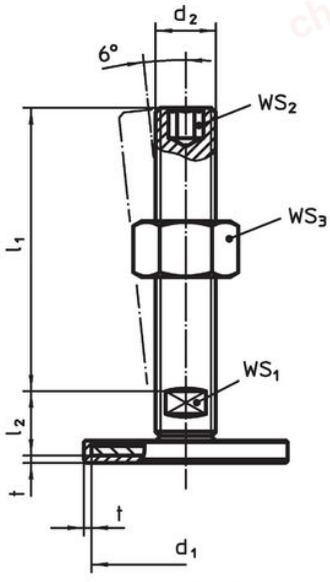

picture 2



picture 3

Order information

Dimensions						WS1	WS2	WS3		Art. No.
d1	d2	l1	h2	l2	t	[mm]	[mm]	[mm]	[g]	
with screw – picture 1, Steel										
40	**M 8**	**40**	–	11	1.5	17	–	13	51	22593.0305
40	**M 8**	**50**	–	11	1.5	17	–	13	51	22593.0310
40	**M 8**	**63**	–	11	1.5	17	–	13	56	22593.0315
40	**M10**	**50**	–	11	1.5	17	–	16	65	22593.0320

chanhvinh.com

Dimensions						WS_1	WS_2	WS_3		Art. No.
d_1	d_2	l_1	h_2	l_2	t					
[mm]						[mm]	[mm]	[mm]	[g]	
40	M10	60	–	11	1.5	17	–	16	71	22593.0325
40	M10	80	–	11	1.5	17	–	16	80	22593.0330
40	M10	100	–	11	1.5	17	–	16	94	22593.0335
40	M12	60	–	11	1.5	17	–	18	86	22593.0340
40	M12	80	–	11	1.5	17	–	18	102	22593.0345
40	M12	100	–	11	1.5	17	–	18	118	22593.0350
40	M12	125	–	11	1.5	17	–	18	136	22593.0355
50	M 8	40	–	11	2.0	17	–	13	70	22593.0360
50	M 8	50	–	11	2.0	17	–	13	74	22593.0365
50	M 8	63	–	11	2.0	17	–	13	77	22593.0370
50	M10	50	–	11	2.0	17	–	16	87	22593.0375
50	M10	60	–	11	2.0	17	–	16	91	22593.0380
50	M10	80	–	11	2.0	17	–	16	103	22593.0385
50	M10	100	–	11	2.0	17	–	16	113	22593.0390
50	M12	60	–	11	2.0	17	–	18	109	22593.0395
50	M12	80	–	11	2.0	17	–	18	110	22593.0400
50	M12	100	–	11	2.0	17	–	18	139	22593.0405
50	M12	125	–	11	2.0	17	–	18	156	22593.0410
60	M 8	40	–	11	2.0	17	–	13	90	22593.0415
60	M 8	50	–	11	2.0	17	–	13	91	22593.0420
60	M 8	63	–	11	2.0	17	–	13	98	22593.0425
60	M10	50	–	11	2.0	17	–	16	110	22593.0430
60	M10	60	–	11	2.0	17	–	16	110	22593.0435
60	M10	80	–	11	2.0	17	–	16	122	22593.0440
60	M10	100	–	11	2.0	17	–	16	132	22593.0445
60	M12	60	–	11	2.0	17	–	18	129	22593.0450
60	M12	80	–	11	2.0	17	–	18	143	22593.0455
60	M12	100	–	11	2.0	17	–	18	158	22593.0460
60	M12	125	–	11	2.0	17	–	18	177	22593.0465
80	M 8	40	–	12	2.0	17	–	13	158	22593.0470
80	M 8	50	–	12	2.0	17	–	13	164	22593.0475
80	M 8	63	–	12	2.0	17	–	13	166	22593.0480
80	M10	50	–	12	2.0	17	–	16	176	22593.0485
80	M10	60	–	12	2.0	17	–	16	181	22593.0490
80	M10	80	–	12	2.0	17	–	16	192	22593.0495
80	M10	100	–	12	2.0	17	–	16	201	22593.0500
80	M12	60	–	12	2.0	17	–	18	199	22593.0505
80	M12	80	–	12	2.0	17	–	18	213	22593.0510
80	M12	100	–	12	2.0	17	–	18	230	22593.0515
80	M12	125	–	12	2.0	17	–	18	245	22593.0520
with screw – picture 2, Steel										
40	M16	75	–	17	1.5	12	8	24	154	22593.0805
40	M16	100	–	17	1.5	12	8	24	186	22593.0810
40	M16	125	–	17	1.5	12	8	24	219	22593.0815
40	M16	150	–	17	1.5	12	8	24	254	22593.0820
40	M16	200	–	17	1.5	12	8	24	318	22593.0825
50	M16	75	–	17	2.0	12	8	24	177	22593.0830
50	M16	100	–	17	2.0	12	8	24	209	22593.0835
50	M16	125	–	17	2.0	12	8	24	244	22593.0840
50	M16	150	–	17	2.0	12	8	24	278	22593.0845
50	M16	200	–	17	2.0	12	8	24	342	22593.0850
60	M16	75	–	17	2.0	12	8	24	196	22593.0855
60	M16	100	–	17	2.0	12	8	24	228	22593.0860
60	M16	125	–	17	2.0	12	8	24	262	22593.0865
60	M16	150	–	17	2.0	12	8	24	295	22593.0870
60	M16	200	–	17	2.0	12	8	24	358	22593.0875
80	M16	75	–	18	2.0	12	8	24	266	22593.0880
80	M16	100	–	18	2.0	12	8	24	299	22593.0885
80	M16	125	–	18	2.0	12	8	24	332	22593.0890
80	M16	150	–	18	2.0	12	8	24	358	22593.0895
80	M16	200	–	18	2.0	12	8	24	432	22593.0900
80	M20	75	–	19	2.0	15	10	30	355	22593.0905

chanhvinh.com

Dimensions						WS_1	WS_2	WS_3		Art. No.
d_1	d_2	l_1	h_2	l_2	t					
[mm]						[mm]	[mm]	[mm]	[g]	
80	**M20**	**100**	–	19	2.0	15	10	30	405	22593.0910
80	**M20**	**125**	–	19	2.0	15	10	30	454	22593.0915
80	**M20**	**150**	–	19	2.0	15	10	30	507	22593.0920
80	**M20**	**200**	–	19	2.0	15	10	30	614	22593.0925
80	**M24**	**100**	–	22	2.0	19	12	36	546	22593.0930
80	**M24**	**125**	–	22	2.0	19	12	36	626	22593.0935
80	**M24**	**150**	–	22	2.0	19	12	36	693	22593.0940
80	**M24**	**200**	–	22	2.0	19	12	36	847	22593.0945
with female thread – picture 3, Steel										
40	**M 8**	**25**	8	–	1.5	14	–	–	46	22593.1105
40	**M10**	**28**	10	–	1.5	14	–	–	46	22593.1110
40	**M12**	**31**	12	–	1.5	17	–	–	63	22593.1115
40	**M16**	**37**	16	–	1.5	22	–	–	98	22593.1120
50	**M 8**	**25**	8	–	2.0	14	–	–	69	22593.1125
50	**M10**	**28**	10	–	2.0	14	–	–	67	22593.1130
50	**M12**	**32**	12	–	2.0	17	–	–	84	22593.1135
50	**M16**	**37**	16	–	2.0	22	–	–	121	22593.1140
60	**M 8**	**25**	8	–	2.0	14	–	–	88	22593.1145
60	**M10**	**28**	10	–	2.0	14	–	–	88	22593.1150
60	**M12**	**32**	12	–	2.0	17	–	–	104	22593.1155
60	**M16**	**37**	16	–	2.0	22	–	–	142	22593.1160
80	**M 8**	**26**	8	–	2.0	14	–	–	156	22593.1165
80	**M10**	**29**	10	–	2.0	14	–	–	159	22593.1170
80	**M12**	**32**	12	–	2.0	17	–	–	173	22593.1175
80	**M16**	**38**	16	–	2.0	22	–	–	209	22593.1180
80	**M20**	**45**	20	–	2.0	27	–	–	268	22593.1185
with screw – picture 1, Stainless steel										
40	**M 8**	**40**	–	11	1.5	17	–	13	51	22593.1805
40	**M 8**	**50**	–	11	1.5	17	–	13	54	22593.1810
40	**M 8**	**63**	–	11	1.5	17	–	13	58	22593.1815
40	**M10**	**50**	–	11	1.5	17	–	16	68	22593.1820
40	**M10**	**60**	–	11	1.5	17	–	16	73	22593.1825
40	**M10**	**80**	–	11	1.5	17	–	16	83	22593.1830
40	**M10**	**100**	–	11	1.5	17	–	16	93	22593.1835
40	**M12**	**60**	–	11	1.5	17	–	18	91	22593.1840
40	**M12**	**80**	–	11	1.5	17	–	18	102	22593.1845
40	**M12**	**100**	–	11	1.5	17	–	18	120	22593.1850
40	**M12**	**125**	–	11	1.5	17	–	18	137	22593.1855
50	**M 8**	**40**	–	11	2.0	17	–	13	74	22593.1860
50	**M 8**	**50**	–	11	2.0	17	–	13	77	22593.1865
50	**M 8**	**63**	–	11	2.0	17	–	13	80	22593.1870
50	**M10**	**50**	–	11	2.0	17	–	16	90	22593.1875
50	**M10**	**60**	–	11	2.0	17	–	16	96	22593.1880
50	**M10**	**80**	–	11	2.0	17	–	16	104	22593.1885
50	**M10**	**100**	–	11	2.0	17	–	16	114	22593.1890
50	**M12**	**60**	–	11	2.0	17	–	18	112	22593.1895
50	**M12**	**80**	–	11	2.0	17	–	18	126	22593.1900
50	**M12**	**100**	–	11	2.0	17	–	18	141	22593.1905
50	**M12**	**125**	–	11	2.0	17	–	18	160	22593.1910
60	**M 8**	**40**	–	11	2.0	17	–	13	92	22593.1915
60	**M 8**	**50**	–	11	2.0	17	–	13	95	22593.1920
60	**M 8**	**63**	–	11	2.0	17	–	13	98	22593.1925
60	**M10**	**50**	–	11	2.0	17	–	16	109	22593.1930
60	**M10**	**60**	–	11	2.0	17	–	16	114	22593.1935
60	**M10**	**80**	–	11	2.0	17	–	16	123	22593.1940
60	**M10**	**100**	–	11	2.0	17	–	16	134	22593.1945
60	**M12**	**60**	–	11	2.0	17	–	18	132	22593.1950
60	**M12**	**80**	–	11	2.0	17	–	18	147	22593.1955
60	**M12**	**100**	–	11	2.0	17	–	18	161	22593.1960
60	**M12**	**125**	–	11	2.0	17	–	18	180	22593.1965
80	**M 8**	**40**	–	12	2.0	17	–	13	163	22593.1970
80	**M 8**	**50**	–	12	2.0	17	–	13	167	22593.1975

chanhvinh.com

Dimensions						WS_1	WS_2	WS_3		Art. No.
d_1	d_2	l_1	h_2	l_2	t					
[mm]						[mm]	[mm]	[mm]	[g]	
80	**M 8**	**63**	–	12	2.0	17	–	13	163	22593.1980
80	**M10**	**50**	–	12	2.0	17	–	16	176	22593.1985
80	**M10**	**60**	–	12	2.0	17	–	16	176	22593.1990
80	**M10**	**80**	–	12	2.0	17	–	16	188	22593.1995
80	**M10**	**100**	–	12	2.0	17	–	16	203	22593.2000
80	**M12**	**60**	–	12	2.0	17	–	18	199	22593.2005
80	**M12**	**80**	–	12	2.0	17	–	18	211	22593.2010
80	**M12**	**100**	–	12	2.0	17	–	18	227	22593.2015
80	**M12**	**125**	–	12	2.0	17	–	18	242	22593.2020
with screw – picture 2, Stainless steel										
40	**M16**	**75**	–	17	1.5	12	8	24	158	22593.2305
40	**M16**	**100**	–	17	1.5	12	8	24	190	22593.2310
40	**M16**	**125**	–	17	1.5	12	8	24	220	22593.2315
40	**M16**	**150**	–	17	1.5	12	8	24	253	22593.2320
40	**M16**	**200**	–	17	1.5	12	8	24	322	22593.2325
50	**M16**	**75**	–	17	2.0	12	8	24	175	22593.2330
50	**M16**	**100**	–	17	2.0	12	8	24	208	22593.2335
50	**M16**	**125**	–	17	2.0	12	8	24	242	22593.2340
50	**M16**	**150**	–	17	2.0	12	8	24	276	22593.2345
50	**M16**	**200**	–	17	2.0	12	8	24	342	22593.2350
60	**M16**	**75**	–	17	2.0	12	8	24	195	22593.2355
60	**M16**	**100**	–	17	2.0	12	8	24	226	22593.2360
60	**M16**	**125**	–	17	2.0	12	8	24	263	22593.2365
60	**M16**	**150**	–	17	2.0	12	8	24	293	22593.2370
60	**M16**	**200**	–	17	2.0	12	8	24	367	22593.2375
80	**M16**	**75**	–	18	2.0	12	8	24	264	22593.2380
80	**M16**	**100**	–	18	2.0	12	8	24	304	22593.2385
80	**M16**	**125**	–	18	2.0	12	8	24	333	22593.2390
80	**M16**	**150**	–	18	2.0	12	8	24	361	22593.2395
80	**M16**	**200**	–	18	2.0	12	8	24	433	22593.2400
80	**M20**	**75**	–	19	2.0	15	10	30	355	22593.2405
80	**M20**	**100**	–	19	2.0	15	10	30	400	22593.2410
80	**M20**	**125**	–	19	2.0	15	10	30	452	22593.2415
80	**M20**	**150**	–	19	2.0	15	10	30	510	22593.2420
80	**M20**	**200**	–	19	2.0	15	10	30	604	22593.2425
80	**M24**	**100**	–	22	2.0	19	12	36	543	22593.2430
80	**M24**	**125**	–	22	2.0	19	12	36	616	22593.2435
80	**M24**	**150**	–	22	2.0	19	12	36	699	22593.2440
80	**M24**	**200**	–	22	2.0	19	12	36	839	22593.2445
with female thread – picture 3, Stainless steel										
40	**M 8**	**25**	8	–	1.5	14	–	–	47	22593.2605
40	**M10**	**28**	10	–	1.5	14	–	–	42	22593.2610
40	**M12**	**31**	12	–	1.5	17	–	–	59	22593.2615
40	**M16**	**37**	16	–	1.5	22	–	–	94	22593.2620
50	**M 8**	**25**	8	–	2.0	14	–	–	69	22593.2625
50	**M10**	**28**	10	–	2.0	14	–	–	64	22593.2630
50	**M12**	**32**	12	–	2.0	17	–	–	79	22593.2635
50	**M16**	**37**	16	–	2.0	22	–	–	115	22593.2640
60	**M 8**	**25**	8	–	2.0	14	–	–	82	22593.2645
60	**M10**	**28**	10	–	2.0	14	–	–	82	22593.2650
60	**M12**	**32**	12	–	2.0	17	–	–	97	22593.2655
60	**M16**	**37**	16	–	2.0	22	–	–	135	22593.2660
80	**M 8**	**26**	8	–	2.0	14	–	–	154	22593.2665
80	**M10**	**29**	10	–	2.0	14	–	–	155	22593.2670
80	**M12**	**32**	12	–	2.0	17	–	–	168	22593.2675
80	**M16**	**38**	16	–	2.0	22	–	–	204	22593.2680
80	**M20**	**45**	20	–	2.0	27	–	–	272	22593.2685

Compliance

For detailed compliance information please select the desired article number.