
chanhvinh.com

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT
A Grupo Antolin Company

PRODUCT DATA SHEET

PL22SL Series (Bi-colour 3 wire)
Ø22mm stainless steel panel lights


Product Configuration

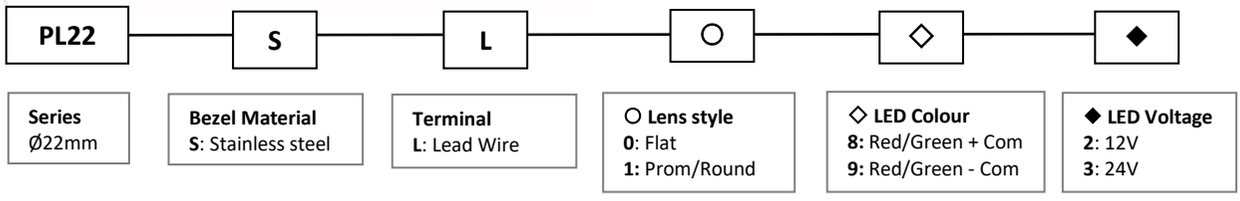


Example Part Number

PL22SL083 Panel indicator 22mm diameter, stainless steel bezel, lead wire terminated, flat lens, Red/Green + Com, 24V.

Outline Dimensions (mm) - Not to scale

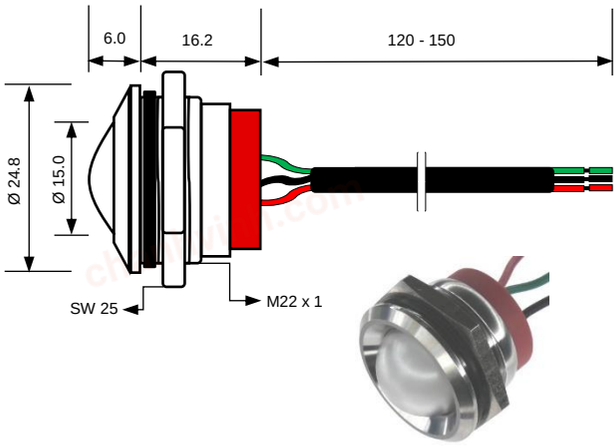

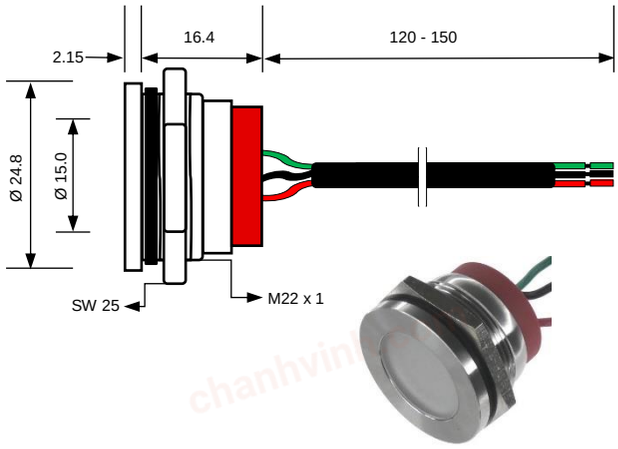

Colour	Typ. Wavelength (nm)		Viewing Angle (º)		Typ. Luminous Intensity (mcd)	
	Rnd	Flat	Rnd	Flat	Rnd	Flat
Red	623	625	15	25	350	3500
Green	518	520	15	25	1000	6500

Notes:

1	**Optical Data**	Applies to component LED @ 25ºC, 20mA
2	**Body Material**	Bezel - Stainless Steel 304, Housing – PA6
3	**Wire Gauge**	24 AWG
4	**LED Life (Average)**	50000 Hrs
5	**Operating Current**	AC/DC
6	**Current Rating**	≤ 20mA
7	**Protection**	IP67
8	**Environmental**	RoHS & REACH SVHC compliant
9	**Marking**	Voltage, colour, CE/UKCA (110V, 240V only)
10	**Operating Temp**	-25ºC~+65ºC
11	**Max Panel Thickness**	Advised 5mm, Absolute 6mm.

Issue 1: 01/06/23

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England

Classified as Public