chanhvinh.com


eao

Your Expert Partner for **Human Machine Interfaces**

Illumination element

Distribution by
Rs-online

45-320.1F16

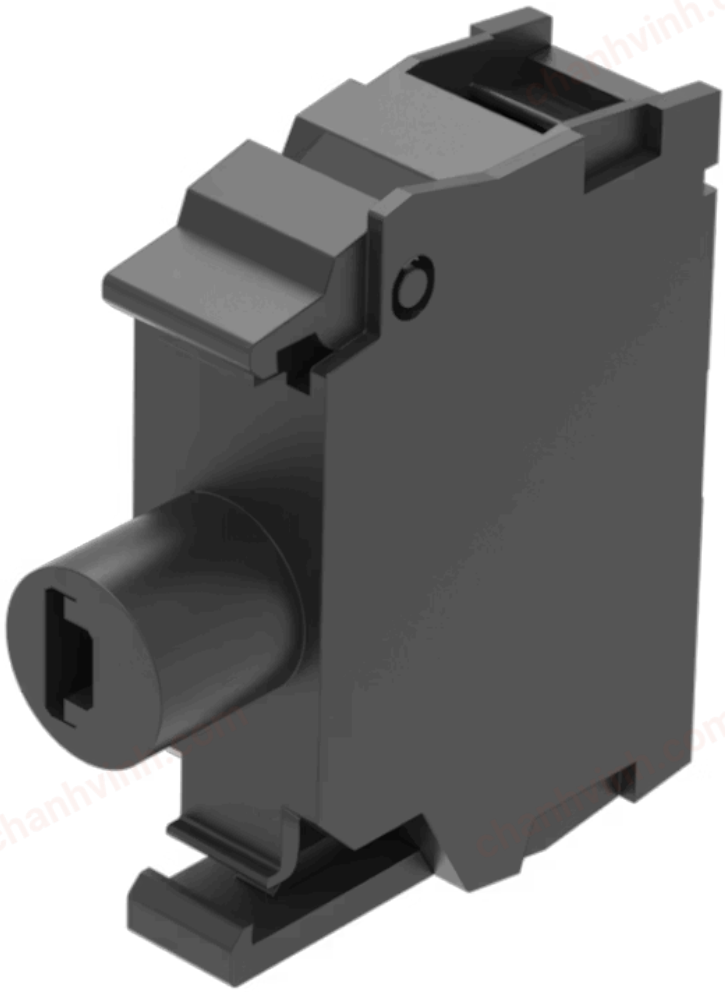

https://rs-online.eao.com/component/45-320.1F...

chanhvinh.com

Your product:



45-320.1F16
Illumination element

MOUNTING

Component mounting type: Front mounting

OPERATING-/INDICATION PART

Illumination colour: Amber

ELECTRICAL CHARACTERISTICS

Operating voltage: 24 V AC/DC

Surge voltage resistance: 4 kV

Lumi. Intensity: 450 - 1120 mcd

MECHANICAL CHARACTERISTICS

Terminal: Screw terminal

Terminal details 1: Solid 2 x (1.0 … 1.5mm^2)
– With end sleeves 2 x (0.5 … 0.75 mm^2)

Terminal details 2: Finely stranded
– Without end sleeves 2 x (0.5 … 0.75 mm^2)
– Without end sleeves 2 x (0.5 … 1.5 mm^2)
– For AWG cables for auxiliary contacts 2 x (18 … 14)

Weight: 0.009 kg

CERTIFICATE


REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Illumination element, Screw terminal, Amber, 24 V AC/DC, Front mounting

Wiring diagrams:

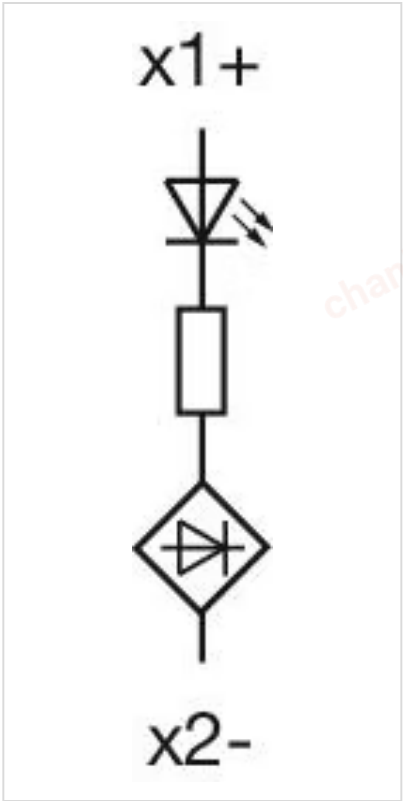

Dimension drawings:

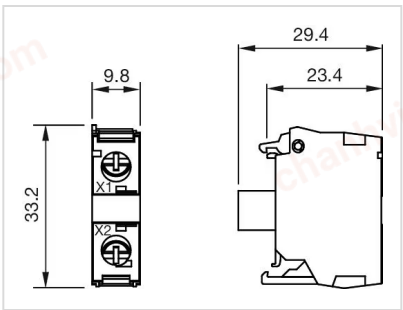

chanhvinh.com