chanhvinh.com

Low Slot Tenons

EH 23130.



Product Description

To be used for locating fixtures and clamping elements onto machine tables with T-slots to DIN 650.


Material

- Steel, case-hardened, blackened, ground

Assembly

They are bolted into the alignment slots of the fixture. Low slot tenons are suitable for use where a fixture will only be used on machines having an identical slot width.


Drawing

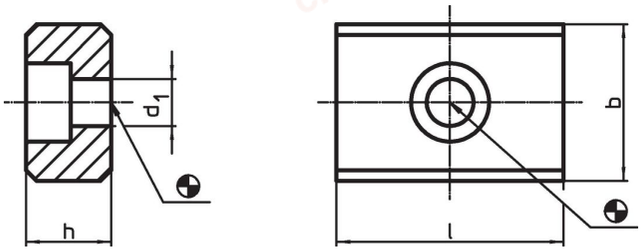

Order information

Dimensions				For screws ISO 4762		Art. No.
b h6	h	l	d_1			
[mm]				[mm]	[g]	
10	8	20	4.5	M4	11	23130.0010
12	8	20	5.5	M5	11	23130.0012
14	10	22	6.6	M6	18	23130.0014
16	10	22	6.6	M6	22	23130.0016
18	10	22	6.6	M6	25	23130.0018
20	10	22	6.6	M6	29	23130.0020
22	12	32	6.6	M6	60	23130.0022
24	12	32	6.6	M6	65	23130.0024

Application example

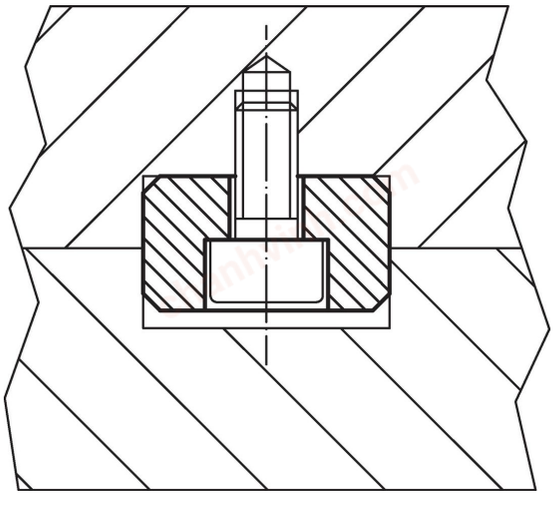

chanhvinh.com

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.