chanhvinh.com

Handwheels • similar to DIN 950, stainless steel

EH 24591.



Product Description

Hub machined; rim turned and mirror-finished on all sides, non-machined surfaces cleanly blasted.

Material

Handwheel
- Stainless steel A4

Machine handle
- Stainless steel A4

Assembly


Shaft-end washers EH 22270. for axial fastening.

More information

Further products

- Shaft-End Washers

Drawing

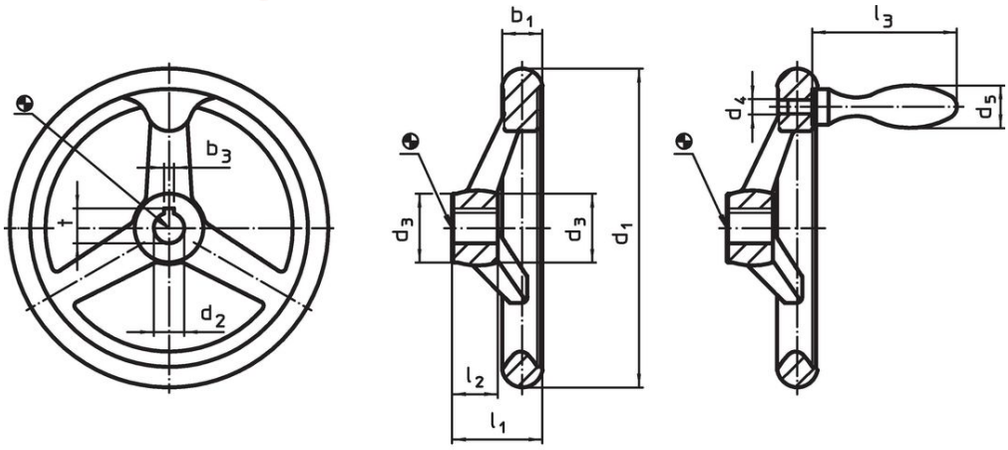

picture 1 picture 2

The orientation of the hub keyway may be different than shown in the drawing.

Order information

Dimensions								Hub keyway, DIN 6885 sheet 1		Number of spokes	Corresponding machine handle DIN 39		Art. No.
d_1	d_2 H9	d_3	d_4	d_5	l_1	l_2	l_3 ~	b_3	t				
[mm]								[mm]			[mm]		
without hub keyway, without handle, form B-F/A (formerly: A 4) – picture 1													
100	10	25.5	–	–	33.0	17	–	–	–	3	–	431.0 g	24591.0005
125	12	27.0	–	–	35.5	18	–	–	–	3	–	633.0 g	24591.0010
140	14	29.0	–	–	38.5	19	–	–	–	3	–	851.0 g	24591.0015
160	14	31.0	–	–	39.5	20	–	–	–	3	–	1.1 kg	24591.0020
200	18	37.0	–	–	44.5	24	–	–	–	3	–	1.9 kg	24591.0030
with hub keyway, without handle, form N-F/A (formerly: A 3) – picture 1													
100	10	25.5	–	–	33.0	17	–	3	11.4	3	–	434.0 g	24591.0105
125	12	27.0	–	–	35.5	18	–	4	13.8	3	–	659.0 g	24591.0110
140	14	29.0	–	–	38.5	19	–	5	16.3	3	–	854.0 g	24591.0115
160	14	31.0	–	–	39.5	20	–	5	16.3	3	–	1.1 kg	24591.0120
200	18	37.0	–	–	44.5	24	–	6	20.8	3	–	1.9 kg	24591.0130
without hub keyway, with machine handle EH 24450., assembled, form B-F/G (formerly: F 4) – picture 2													
100	10	25.5	M 6	16	33.0	17	50	–	–	3	16	472.0 g	24591.0405
125	12	27.0	M 8	20	35.5	18	64	–	–	3	20	721.0 g	24591.0410
140	14	29.0	M 8	20	38.5	19	64	–	–	3	20	961.0 g	24591.0415
160	14	31.0	M10	25	39.5	20	80	–	–	3	25	1.3 kg	24591.0420
200	18	37.0	M10	25	44.5	24	80	–	–	3	25	2.0 kg	24591.0430

chanhvinh.com

Dimensions								Hub keyway, DIN 6885 sheet 1		Number of spokes	Corresponding machine handle DIN 39		Art. No.
d_1	d_2 H9	d_3	d_4	d_5	l_1	l_2	l_3 ~	b_3	t				
[mm]								[mm]			[mm]		
with hub keyway, with machine handle EH 24450. assembled, form N-F/G (formerly: F 3) – picture 2													
100	10	25.5	M 6	16	33.0	17	50	3	11.4	3	16	473.0 g	24591.0505
125	12	27.0	M 8	20	35.5	18	64	4	13.8	3	20	753.0 g	24591.0510
140	14	29.0	M 8	20	38.5	19	64	5	16.3	3	20	939.0 g	24591.0515
160	14	31.0	M10	25	39.5	20	80	5	16.3	3	25	1.3 kg	24591.0520
200	18	37.0	M10	25	44.5	24	80	6	20.8	3	25	2.0 kg	24591.0530

Compliance

RoHS-compliant
Compliant with Directive 2011/65/EU [RoHS].

Does not contain SVHC substances
No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 04.02.2026.

SCIP-code
N/A

Does not contain Proposition 65 substances
No Proposition 65 substances included.
https://www.P65Warnings.ca.gov/

Free from Conflict Minerals
This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.

POP-compliant
Contains no persistent organic pollutants – Stockholm Convention [POP] as of September 2025.

PFAS-compliant
Contains no per- and polyfluoroalkyl substances (PFAS).

TSCA-compliant
Agent concentration in this product does not exceed the specified threshold.