
chanhvinh.com




HEYClip™ Tension Wire Clips - Vinyl U Style

Adhesive-Back Mount


MAXIMUM BUNDLE DIAMETER A		PART NO.	DESCRIPTION	PACKAGING		OVERALL HEIGHT D*		FOOTPRINT** B x C	
in.	mm.	Gray		Std. Pack	Small Pack †	in.	mm.	in.	mm.
WCUA Series									
.13	3,2	**3335**	WCUA 125	5000	25	.29	7,4		
.25	6,4	**3336**	WCUA 250	5000	25	.47	11,9	.75 x .75	19,1 x 19,1
.38	9,5	**3337**	WCUA 375	5000	25	.59	15,1		
.50	12,7	**3338**	WCUA 500	5000	10	.61	15,5		
.56	14,3	**3339**	WCUA 562	1000	10	.64	16,3	1.00 x 1.00	25,4 x 25,4
.75	19,1	**3341**	WCUA 750	1000	10	.89	22,6		
WCDA Series								NEW PRODUCT!	
.25	6,4	**3821**	WCDA 250	5000	25	.40	10,2	.50 x .50	12,7 x 12,7
.50	12,7	**3822**	WCDA 500	3000	25	.73	18,5	.75 x .75	19,1 x 19,1
.75	19,1	**3823**	WCDA 750	3000	10	1.02	25,9	1.13 x 1.00	28,7 x 25,4
1.00	25,4	**3824**	WCDA 1000	1000	10	1.30	33,0	1.50 x 1.25	38,1 x 31,8

Standard color gray.
* At maximum wire capacity.
** Custom lengths available by special order, consult Heyco.
† To order Small Packs, please add the suffix -P to Part No.; e.g., 3335-P.

- Manufactured from a general purpose PVC with an excellent NFPA fire and flame resistance rating.
- The compact design combined with a strong acrylic based adhesive provides a low cost means of routing cable or tubing.

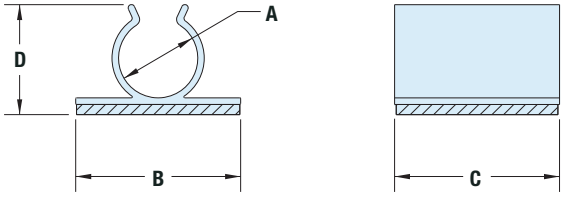

WCUA

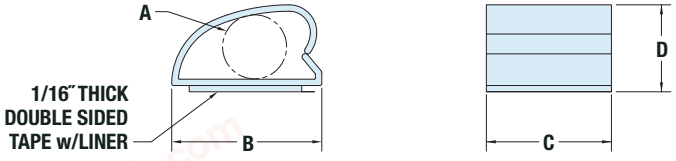

WCDA

Material	PVC
Flammability Rating	94V-0
Temperature Range	65°F (18°C) to 100°F (38°C)

Quick Specs