
chanhvinh.com

# ME5023

## Magnetic sensor

MEB3060-ANKG/0,3M/PH/AS

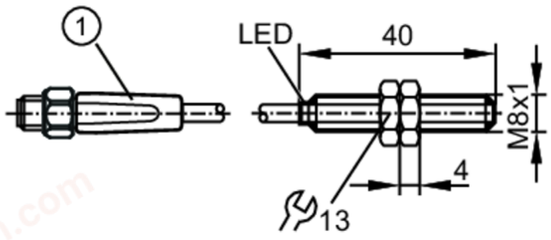


1 illustration (example)

| | | |
|---|---|---|
| **Product characteristics** | | |
| Electrical design | | NPN |
| Output function | | normally open |
| Sensing range | [mm] | 60; (referred to magnet M 4.0) |
| Housing | | threaded type |
| Dimensions | [mm] | M8 x 1 / L = 40 |
| **Electrical data** | | |
| Operating voltage | [V] | 10...30 DC |
| Current consumption | [mA] | < 10 |
| Protection class | | III |
| Reverse polarity protection | | yes |
| **Outputs** | | |
| Electrical design | | NPN |
| Output function | | normally open |
| Max. voltage drop switching output DC | [V] | 2.5 |
| Permanent current rating of switching output DC | [mA] | 200 |
| Switching frequency DC | [Hz] | 5000 |
| Short-circuit protection | | yes |
| Overload protection | | yes |
| **Detection zone** | | |
| Sensing range | [mm] | 60; (referred to magnet M 4.0) |
| **Accuracy / deviations** | | |
| Hysteresis | [% of Sr] | 1...10 |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -25...75 |
| Protection | | IP 67 |

chanhvinh.com

# ME5023

## Magnetic sensor

MEB3060-ANKG/0,3M/PH/AS

| | | | |
|---|---|---|---|
| **Tests / approvals** | | | |
| EMC | | EN 61000-4-2 ESD | 4 kV CD / 8 kV AD |
| | | EN 61000-4-3 HF radiated | 10 V/m |
| | | EN 61000-4-4 Burst | 2 kV |
| | | EN 61000-4-6 HF conducted | 10 V |
| | | EN 55011 | class B |
| **Mechanical data** | | | |
| Weight | [g] | 28.2 | |
| Housing | | threaded type | |
| Dimensions | [mm] | M8 x 1 / L = 40 | |
| Thread designation | | M8 x 1 | |
| Materials | | housing: stainless steel (1.4404 / 316L); sensing face: PBT orange; end cap: PA; lock nuts: brass | |
| **Displays / operating elements** | | | |
| Display | | switching status | 1 x LED, yellow |
| **Accessories** | | | |
| Items supplied | | lock nuts: 2 | |
| **Remarks** | | | |
| Pack quantity | | 1 pcs. | |

**Electrical connection - plug**

Cable: 0.3 m, PUR

Connector: 1 x M8; coding: A; Locking: knurled nut, rotatable




Connection

