
chanhvinh.com

kabeltronik®

quality at the highest level

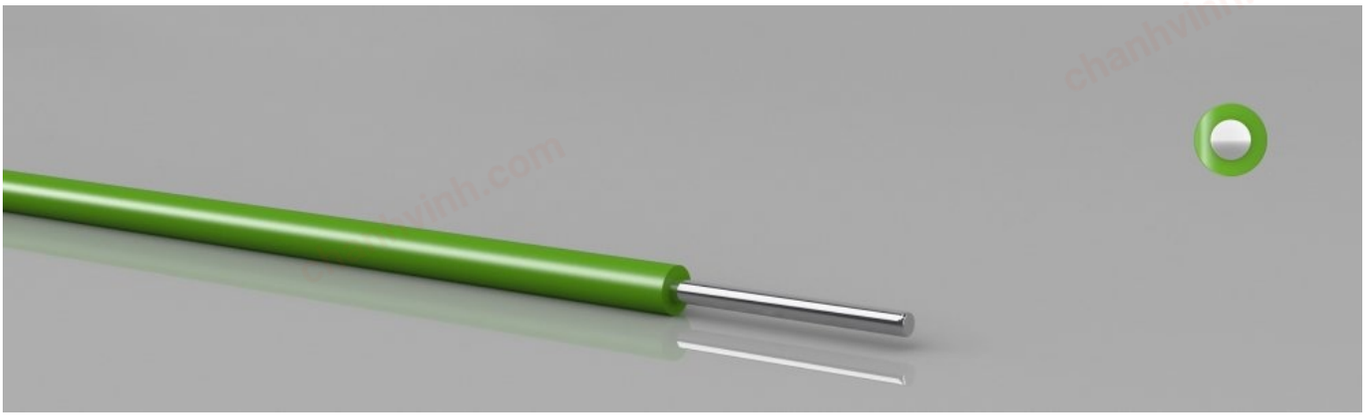

✓ installation ✓ RoHS ✓ REACH ✓ CE

Wire Wrap® solid wire AWG 24

7Y ETFE
Order-No. 3701024

Application / Description

In the fields of aerospace and chemical industry as well as general wiring technology, where high mechanical and thermal characteristics are required. Applicable for the Wire Wrap technology.

Variant data

O.D. min.	0,91 mm
O.D. max.	1,01 mm
weight	3,0 kg/km
Cu-weigth	2,7 kg/km
skinning tool	40025

Construction / data

Conductor	tinned solid copper wire
Cross section	0,21 qmm
Conductor-Ø	0,51 mm
AWG	24
Core insulation	ETFE-7Y
Dimension	AWG 24

Technical characteristics

Temperature range: -65°C to +150°C

Operating voltage	600 V
Testing voltage	3.000 V

Packaging

Rings at 100m, Spools
Lower and upper lengths according to availability. Special packaging on request.

chanhvinh.com

Add-on information

Wire Wrap decribes a certain connection technology

© kabeltronik® Arthur Volland GmbH
Mühlweg 6, 85095 Denkendorf
Tel.: 08466 - 9404-0
E-Mail: info@kabeltronik.de

kabeltronik®