
chanhvinh.com


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/05/17	J.LABOY

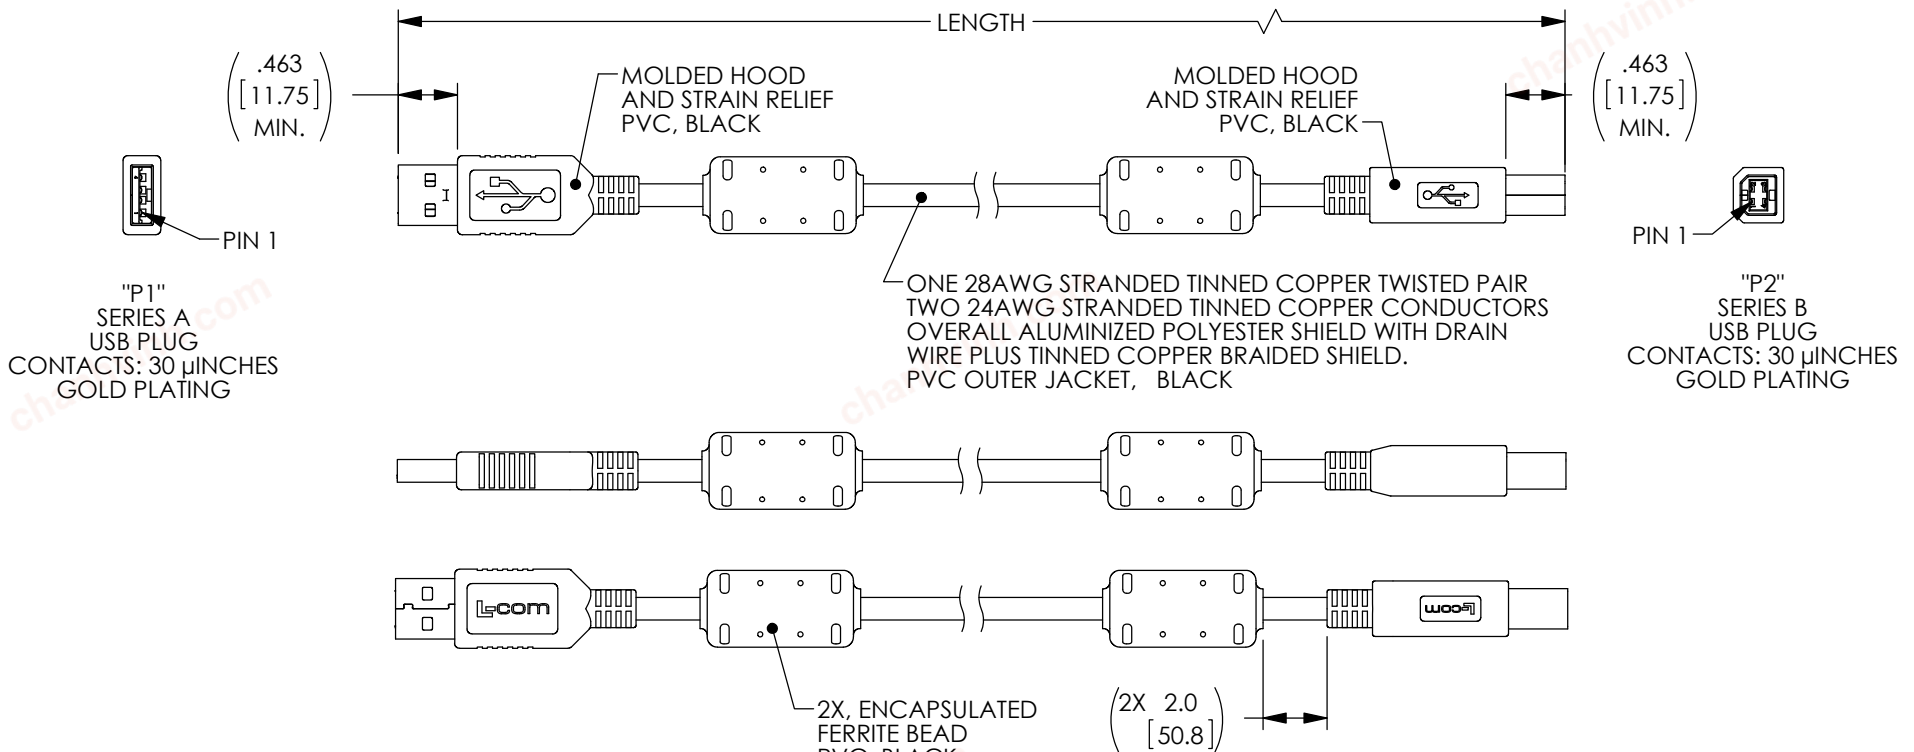

"P1" WIRING DIAGRAM "P2"

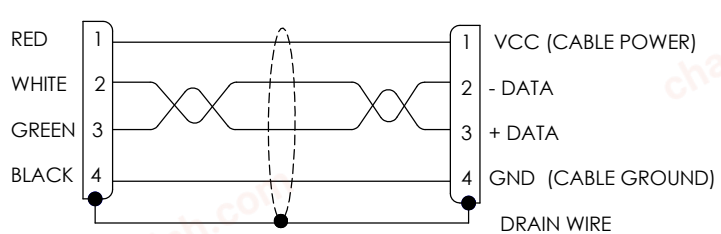

PART NUMBER	LENGTH METERS[FEET]
U2A00002-05M	0.5 [1.64]
U2A00002-1M	1.0 [3.28]
U2A00002-2M	2.0 [6.56]
U2A00002-3M	3.0 [9.84]
U2A00002-5M	5.0 [16.41]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]

PROJECTION

APPROVALS		DATE
DRAWN BY	S.LI	04/25/2017
CHECKED BY	B.ZHANG	04/25/2017
APPROVED BY	S.PAN	04/25/2017

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CA, USB2.0 TYPE A/B W/FERRITE

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	U2A00002	A

SCALE: NONE | CAD FILE: U2A00002.SLDDRW | SHEET 1 OF 1