
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

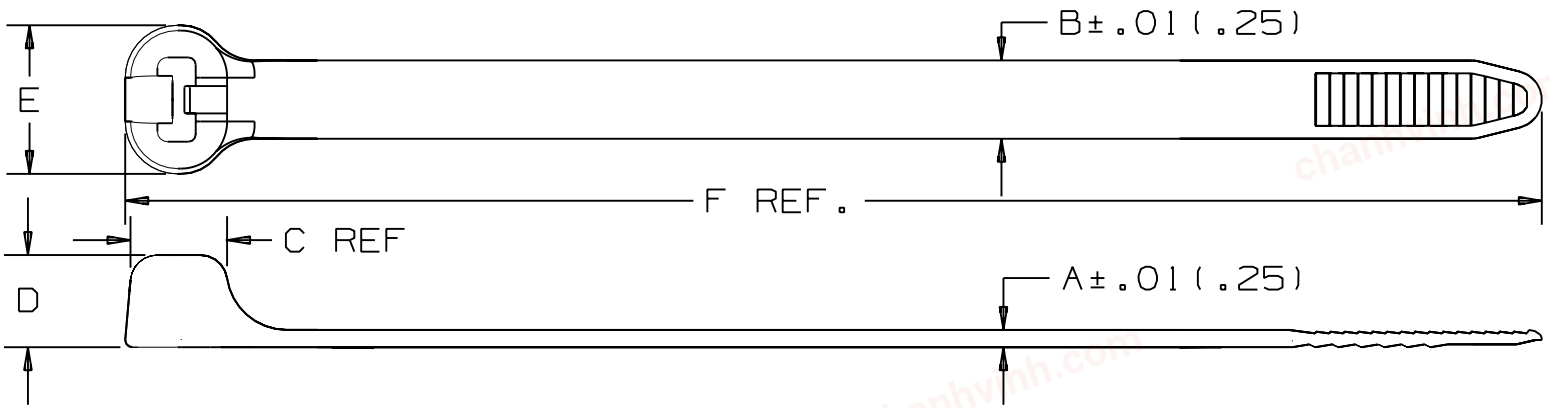

PANDUIT PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
BT2LH	.188 (4.8)	2.00 (51)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	8.7 (221)	120 (534)	LIGHT HEAVY	.59 (267)
BT3LH	.188 (4.8)	3.00 (76)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	11.8 (300)	120 (534)	LIGHT HEAVY	.79 (358)
BT4LH	.188 (4.8)	4.00 (102)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	14.9 (378)	120 (534)	LIGHT HEAVY	.99 (449)
BT5LH	.188 (4.8)	5.00 (127)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	18.1 (460)	120 (534)	LIGHT HEAVY	1.19 (540)
BT6LH	.188 (4.8)	6.00 (152)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	21.2 (538)	120 (534)	LIGHT HEAVY	1.39 (631)
BT7LH	.188 (4.8)	7.00 (178)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	24.4 (620)	120 (534)	LIGHT HEAVY	1.59 (722)
BT8LH	.188 (4.8)	8.00 (203)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	27.5 (699)	120 (534)	LIGHT HEAVY	1.79 (813)
BT9LH	.188 (4.8)	9.00 (229)	.065 (1.7)	.275 (7.0)	.325 (8.3)	.320 (8.1)	.520 (13.2)	30.7 (780)	120 (534)	LIGHT HEAVY	1.99 (904)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP
6	5/2/06	JABO		REMOVED CURVED TIP REFERENCE & TIP STYLE COLUMN	BT-0037	6			

PANDUIT CORP. TINLEY PARK, ILLINOIS

DOME-TOP Barb Ty CABLE TIES
BT SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±.10(2.5) (.XXX) ±.020(.51)
(.XX) ±.02(.5) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: PMH
DATE: 6-24-93
CHK'D: JVL
MAT'L: NYLON 6.6
SCALE: NONE
DRAWING NO.: BT-0037
SHT. 3 OF 3
DWG SIZE: A