chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	TAB SIZE in. [mm]	WIRE RANGE ENGLISH AWG	WIRE RANGE METRIC mm^2	COLOR	DIMENSIONS in. [mm] MAX. WIRE INSULATION DIAMETER	L ± .03 [0,8]	W ± .01 [0,3]	H ± .01 [0,3]	TOOL CHART PRESS CP-871, UC200, UC100 **APPLICATORS CA9 DIES	TOOL CHART PRESS CP-871, UC200 **APPLICATORS CA-800EZ DIES
DV18-250B	.250 X .032 [6,3 X 0,8]	22-18	0,5-1,0	RED	.15 [3,8]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD9-1A	CD-800-1
DV18-205B	.205/.187 X .032 [5,2/4,8 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV18-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV18-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV18-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
DV14-250B	.250 X .032 [6,3 X 0,8]	16-14	1,5-2,5	BLUE	.17 [4,3]	.83 [21,1]	.29 [7,4]	.12 [3,0]	CD9-2A	CD-800-2
DV14-205B	.205 X .032 [5,2 X 0,8]					.77 [19,6]	.25 [6,4]	.12 [3,0]		
DV14-206B	.205/.187 X .020 [5,2/4,8 X 0,5]					.77 [19,6]	.25 [6,4]	.11 [2,8]		
DV14-187B	.187 X .032 [4,8 X 0,8]					.77 [19,6]	.23 [5,8]	.10 [2,5]		
DV14-188B	.187 X .020 [4,8 X 0,5]					.77 [19,6]	.23 [5,8]	.09 [2,3]		
*DV10-250	.250 X .032 [6,3 X 0,8]	12-10	4,0-6,0	YELLOW	.23 [5,8]	.95 [24,1]	.29 [7,4]	.12 [3,0]	CD9-3B	CD-800-3

*NOT UL LISTED OR CSA CERTIFIED
**APPLICATOR FOOTPRINT MAY BE COMPATIBLE WITH OTHER COMMON PRESSES OR WIRE PROCESSING MACHINES

NOTES:
1. USED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F [105°C] MAX. OPERATING TEMPERATURE
   C. 600V. MAX. BLDG WIRE
   D. 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
2. MATERIAL:
   A. STAMPING: CDA 260 BRASS, TIN PLATED
   B. HOUSING: VINYL
3. WIRE STRIP LENGTH:

   9/32 $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]

   11/32 $^{+1/32}_{-0}$ [8,7 $^{+0,8}_{-0}$] FOR DV10-250
4. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
6. THE DV10-250 IS CONSTRUCTED WITH BRASS SLEEVE IN THE WIRE CRIMP AREA

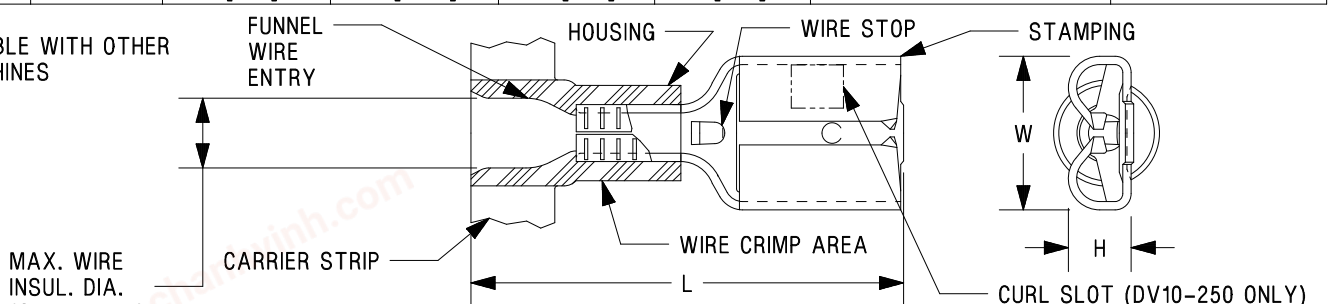

LISTED 20H3 E78522

CERTIFIED LR31212

PART NUMBER: SEE TABLE

TITLE: FEMALE DISCONNETCS, VINYL INSULATED

CUSTOMER DRAWING

ITEM REVISION NAME: N41169BA/12

DATASET FILE NAME: N41169BA_DC/12B

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: A41169

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
12B	06-03-24	NM	JBN	MRWA	ADDED CURL SLOT FEATURE	098711/01
12A	02-02-21	JHNU	JADE	JADE	REMOVED CP-861, CP-862 ADDED UC100, UC200 FORMATTED TOOL CHART	098711/00

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
DSM	-	LA	N.T.S.	SHEET 1 OF 1	A

A-SIZE CUSTOMER