chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


HSTT 12 - 48 Q 2

- COLOR
  - BLANK = BLACK, 1 = BROWN, 2 = RED, 3 = ORANGE, 4 = YELLOW, 5 = GREEN, 6 = BLUE, 10 = WHITE, 45 = YELLOW/GREEN, C = CLEAR (A)
- QUANTITY PER CARTON (48 IN ONLY)
  - Q = 25pcs.
  - 5 = 5pcs.
  - 2 = 2pcs.
- LENGTH IN"

INCHES	FEET:
.5	M=1000
1	D=500
48	T=200
	C=100
	L=50
	Q=25

- TUBING SIZE - EXPANDED I.D.
- TT = THIN WALL
  TTV = THIN WALL VW-1 RATED

PANDUIT PART NUMBER	Min. Exp. I.D In.(mm)	Max. Rec. I.D In.(mm)	RECOVERED WALL In.(mm)
HSTT05	.046 (1.2)	.023 (.6)	.016±.003 (.406±.076)
HSTT06	.063 (1.6)	.031 (.8)	.017±.003 (.432±.076)
HSTT09	.093 (2.4)	.046 (1.2)	.020±.003 (.508±.076)
HSTT12	.125 (3.2)	.062 (1.6)	.020±.003 (.508±.076)
HSTT19	.187 (4.8)	.093 (2.4)	.020±.003 (.508±.076)
HSTT25	.250 (6.4)	.125 (3.2)	.025±.003 (.635±.076)
HSTT38	.375 (9.5)	.187 (4.8)	.025±.003 (.635±.076)
HSTT50	.500 (12.7)	.250 (6.4)	.025±.003 (.635±.076)
HSTT75 (B)	.750 (19.1)	.375 (9.5)	.030±.003 (.762±.076)
HSTT100	1.000 (25.4)	.500 (12.7)	.035±.005 (.889±.127)
HSTT150 (B)	1.500 (38.1)	.750 (19.1)	.040±.006 (1.016±.152)
HSTT200	2.000 (50.8)	1.000 (25.4)	.045±.007 (1.143±.178)
HSTT300	3.000 (76.2)	1.500 (38.1)	.050±.008 (1.270±.203)
HSTT400	4.000 (101.6)	2.000 (50.8)	.055±.009 (1.397±.229)

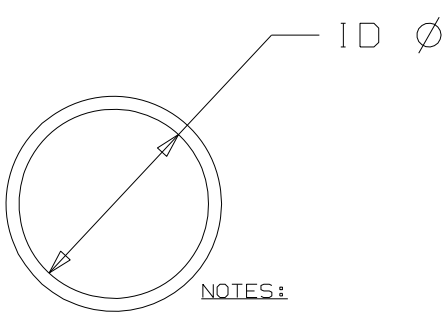

NOTES:

1. SHRINK RATIO: 2:1
2. MATERIAL: CROSSLINKED POLYOLEFIN
3. "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE."
4. REELS OF PRODUCT ARE ALLOWED TO HAVE SPLICES. (E)

PACK CODE	M	D	T	C	L	Q
ALLOWED SPLICES	4	3	2	1	1	0

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
3	5/15/13	LEF	VJS	(E) ADDED NOTE#4 ALLOWED SPLICES PER REEL LENGTH	GB0239KH 3	RAMI	
2	2/21/12	LEF		(C) ADDED "CUSTOMER DRAWING" TO TITLE BLK (D) REMOVED ALL TOLERANCES IN TITLE BLK	GB0239KH 2	RAMI	
1	10/5/11	LEF		(A) ADD COLORS 1 & 3 (B) CHANGE METRIC (19.0 TO 19.1)	GB0239KH 1	RAMI	

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G03597HN_DC_G00239KH_PB_HSTT_03

PANDUIT CORP. TINLEY PARK, ILLINOIS

(C) HSTT THIN WALL HEAT SHRINKABLE TUBING CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (D)
(.X) ------ (.XXX) -------
(.XX) ------ ANGLES ---

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY LGRAVITT
DATE 5/12/03
CHK'D
MAT'L: SEE NOTES
SCALE NONE
DRAWING NO. GB0239KH
DWG A SIZE