
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

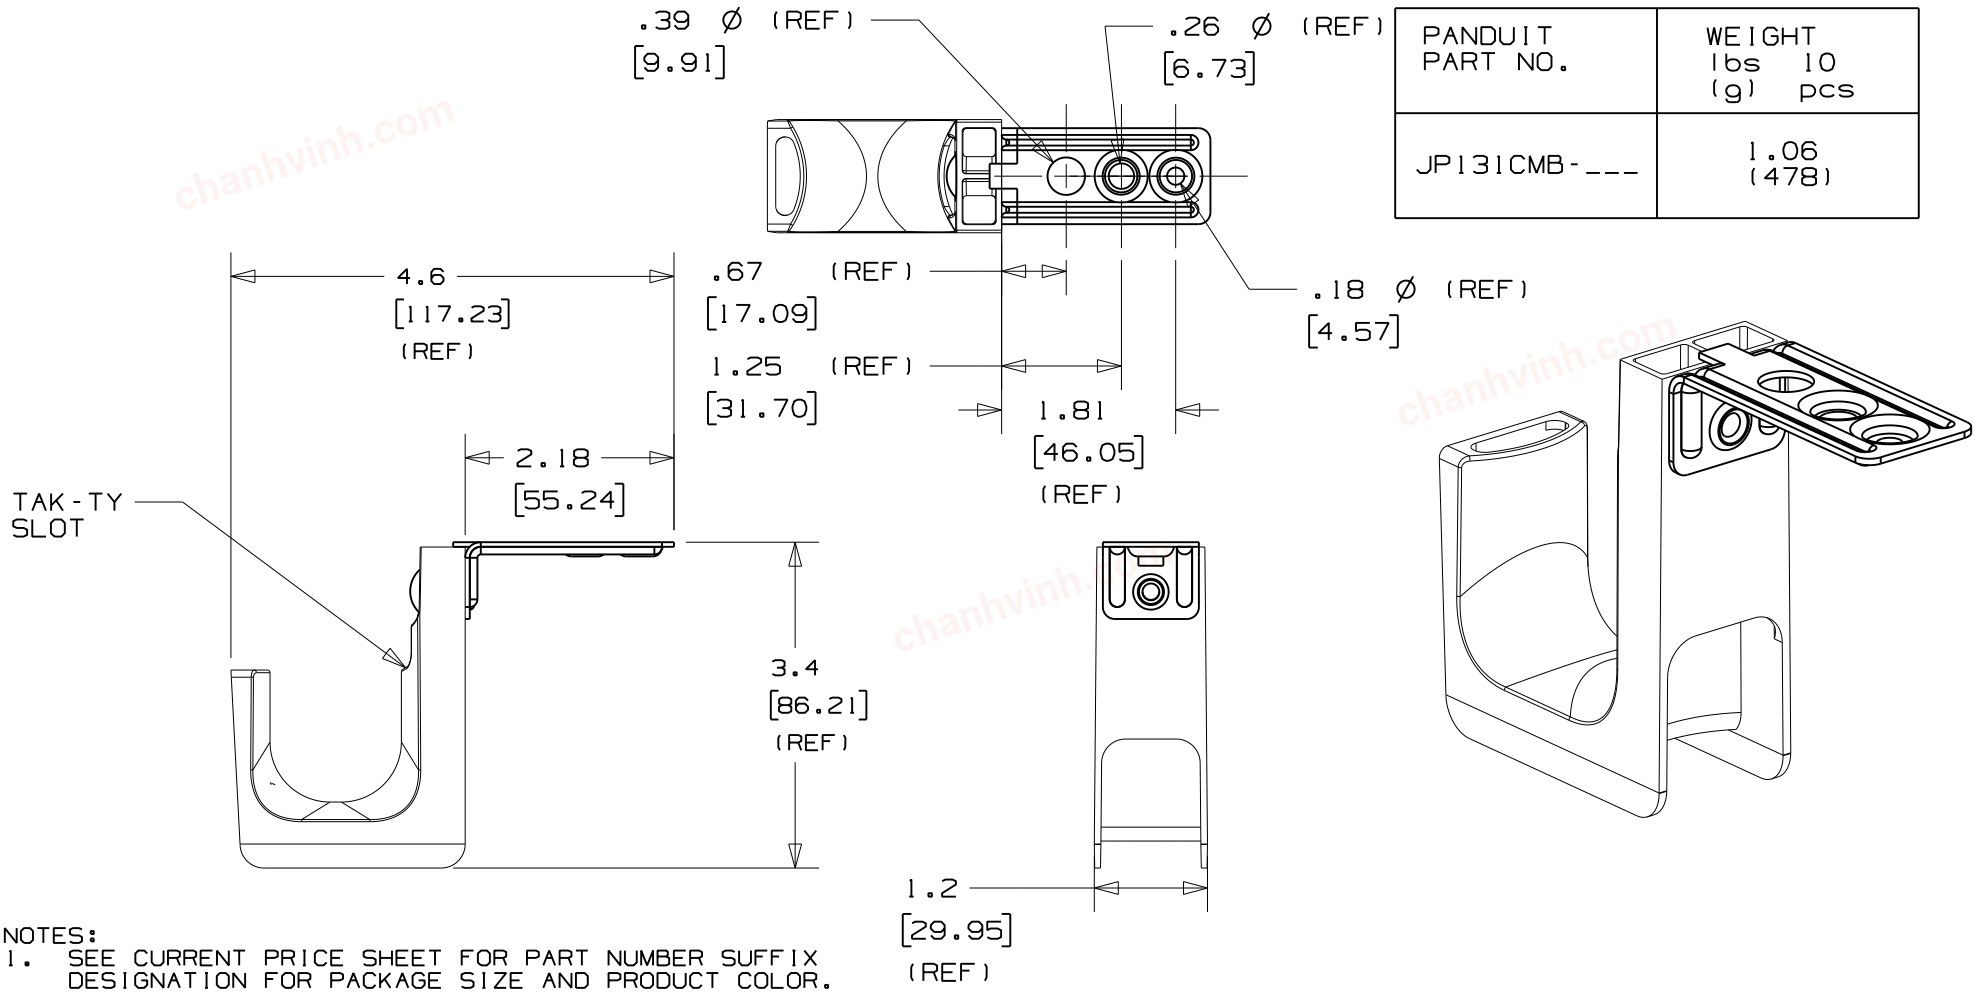

PANDUIT PART NO.	WEIGHT lbs 10 (g) pcs
JP131CMB-___	1.06 (478)

NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PRODUCT COLOR.
2. HOOK MATERIAL: NYLON 6/6
   ANGLE BRACKET MATERIAL: PRE-GALVANIZED STEEL,
   RIVET MATERIAL: ALUMINUM
3. PRODUCT IS DESIGNED TO SUPPORT A MAXIMUM OF 1 5/16" (33.34) DIAMETER BUNDLE. MAXIMUM RECOMMENDED STATIC LOAD: 25 lbs.
4. PRODUCT INCORPORATES FEATURES ALLOWING USER TO RETAIN CABLE BUNDLES IN J-PRO J-HOOK WITH TAK-TY CABLE TIES UP TO 3/4" WIDE.
5. PRODUCT MARKINGS:
   cULus logo and statement:
   "SUITABLE FOR USE IN AIR HANDLING SPACES IN ACCORDANCE WITH SECTION 300-22 (C) & (D) OF THE NATIONAL ELECTRIC CODE."
   ULC logo and statement:
   "IN ACCORDANCE WITH CAN/ULC S-102.2-10 IN SINGLE UNITS OR PAIRS, 4 ft (1220mm) MIN. SPACING, FSR=0, SDC=35."

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	11/08/2012	DBLA	GGC	KLN	INITIAL RELEASE	GAECN00220

D10100DA/12

TITLE
J-PRO CEILING MOUNT J-HOOK (JP131CMB-___)
CUSTOMER DRAWING

ITEM REVISION NAME: 12I031AB/00
DATASET FILE NAME: 12I031AB_DC_C11001/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

PANDUIT™

MATERIAL: SEE NOTE 2

DRAWING NUMBER: C11001

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
DBLA	11/08/0212	KLN	NONE		A