

chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|---|---|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 14 - 10 AWG STR, 12 - 10 AWG SOL |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 7/16 in. |
| Stud Size | 1/4 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | N/A |
| Panduit Die Index No. on Barrel | N/A |
| Alternate Industry Die Index No. ( ) on Barrel | N/A |

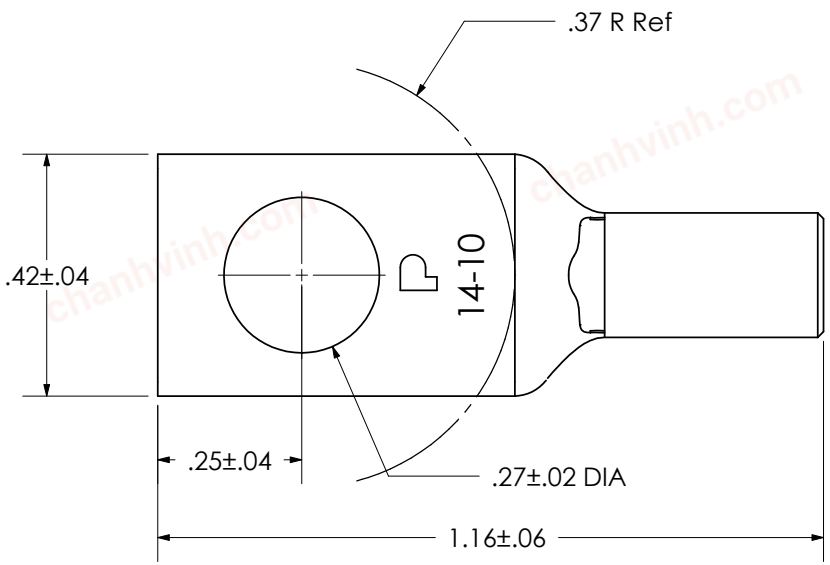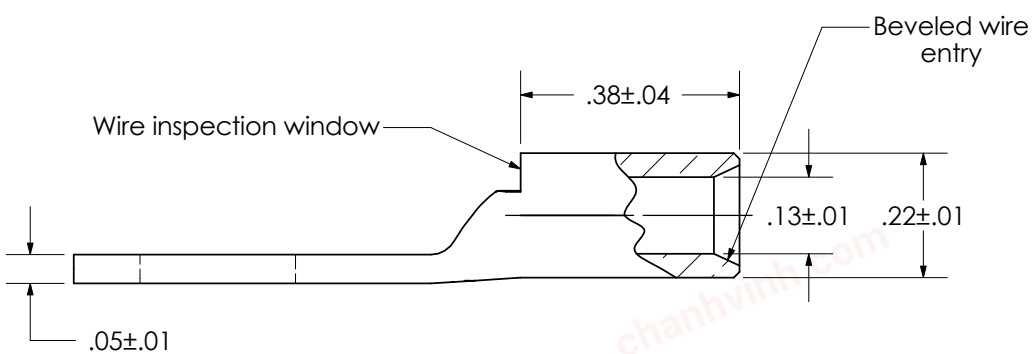


CERTIFIED

LISTED
Wire Connector

| REV | DATE | BY | CHK | DESCRIPTION | ECN |
|---|---|---|---|---|---|
| 02 | 11/04 | JHNU | JHNU | REVISED WIRE SIZE | 12305 |

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCA10-14-L
Copper Lug - One-Hole, Standard Barrel

| SCALE | DRAWING NO / CAD FILE |
|---|---|
| N/A | LCA10-14-CUST |