chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER*	USED WITH THESE ** CABLE TIES	PANEL *** THICKNESS	DIMENSIONS INCHES / [MM] A (REF)	B	C (REF)	D	E	WEIGHT lbs/100 pcs (g)/100 pcs
MCMS12-P	M, I, S	0.03 - 0.125 [0.76-3.18]	0.880 [22.35]	0.560 [14.22]	0.318 [8.08]	0.220 [5.59]	0.025 [0.64]	0.59 (268)
MCMS25-P		0.125 - 0.240 [3.18 - 6.09]			0.455 [11.56]			0.728 (330)
MCMS30-P		0.220 - 0.270 [5.58 - 6.86]			0.535 [13.59]			0.798 (362)

NOTES:


* 1. See current price sheet for part number suffix designation for package size.


** 2. Cable tie cross-section code:
M - miniature
I - intermediate
S - standard

*** 3. Refer to table for panel thickness ranges for each product.

4. MATERIAL: AISI 1050 STEEL .025" ±.002 THICK
HEAT TREAT TO RC 46-50 AFTER FORMING

PLATING: ZINC PLATED WITH CLEAR CHROMATE CONVERSION COATING PER ASTM B 633-85 TYPE III CLASS 1 SC#1 MILD.

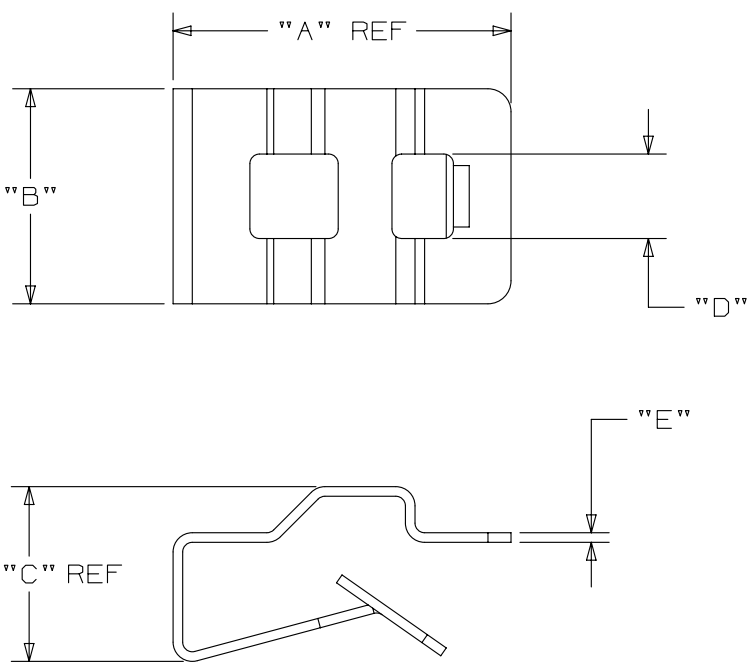

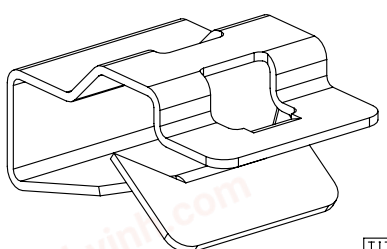

MCMS25-P (SHOWN)

DIMENSIONS IN BRACKETS ARE METRIC [MM]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	12/3/14	MBY	MPH	JADE	REVISED DIM 'C'	GB1335BA/07
06	5/29/14	MBY	MPH	JADE	MADE DIM "A" REF. AND INCREASED .XXX TOLERANCE FROM .010 TO .015. UPDATED TITLE BORDER .	GB1335BA/06

TITLE

MCMS__-P METAL CLIP ON MOUNT

CUSTOMER DRAWING

ITEM REVISION NAME: 10B015MV/01

DATASET FILE NAME: 10B015MV/01 - GB1335BA_REV07

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± 0.05 [1.3] .XXX ± 0.015 [0.381]
.XX ± 0.02 [0.5] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTE 4

DRAWING NUMBER: GB1335BA

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JAD	9/23/96		FULL		A