
chanhvinh.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	MILITARY PART NO. AND CLASS	STUD SIZE		DIMENSIONS in. [mm]				
		ENGLISH	METRIC	L ± .03 [0,76]	W ± .01 [0,25]	C ± .02 [0,51]	M ± .03 [0,76]	H ± .01 [0,25]
PM6-3R	--------	--	M3	.76 [19,2]	.23 [5,8]	.31 [7,9]	.62 [15,8]	.13 [3,3]
P10-6R	MS20659-165 CLASS 1 & 2	#6	M3,5	.78 [19,8]	.31 [7,9]	.31 [7,9]	.62 [15,8]	.15 [3,8]
P10-8R	--------	#8	M4	.78 [19,8]	.31 [7,9]	.31 [7,9]	.62 [15,8]	.17 [4,3]
P10-10R	MS20659-105 CLASS 1 & 2	#10	--	.81 [20,6]	.38 [9,7]	.31 [7,9]	.62 [15,8]	.20 [5,1]
PM6-5R	--------	--	M5	.81 [20,6]	.37 [9,50]	.31 [7,9]	.62 [15,8]	.21 [5,3]
P10-14R	--------	1/4"	M6	.96 [24,4]	.52 [13,2]	.38 [9,7]	.70 [17,8]	.27 [6,9]
P10-56R	MS20659-106 CLASS 1 & 2	5/16"	M6	.95 [24,1]	.52 [13,2]	.38 [9,7]	.70 [17,8]	.33 [8,4]
P10-38R	MS20659-128 CLASS 1 & 2	3/8"	M8	1.05 [26,7]	.58 [14,7]	.44 [11,2]	.75 [19,1]	.39 [9,9]
P10-12R	--------	1/2"	--	1.20 [30,5]	.72 [18,3]	.53 [13,5]	.84 [21,3]	.52 [13,2]

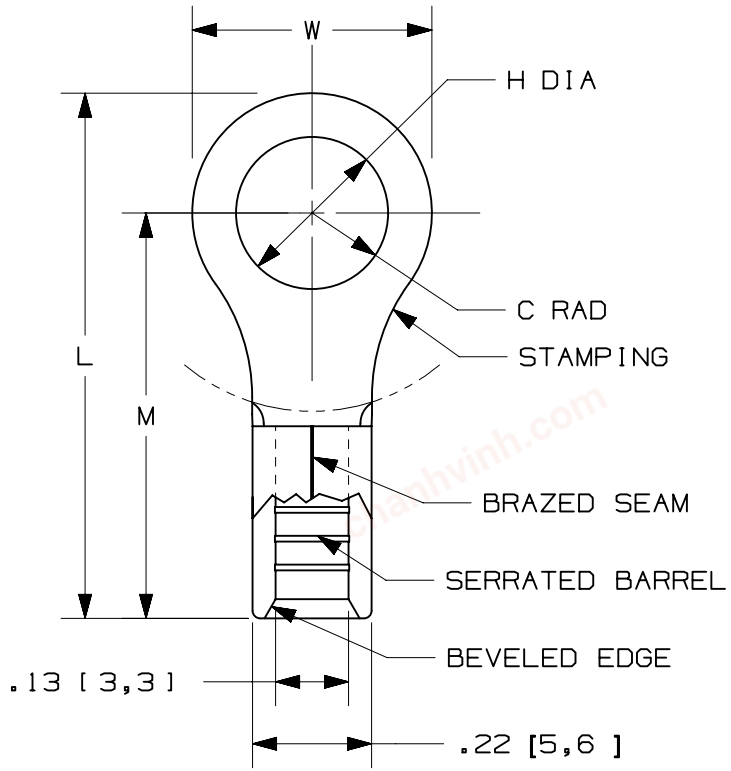

NOTES:
1. USED FOR:
   A. 12-10 AWG [4,0-6,0 mm²] SOILD OR STRANDED COPPER WIRE
      14-10 AWG [2,5-6,0 mm²] SOILD OR STRANDED COPPER WIRE
      WITH CT-100A, CT-200, CT-600-A (CT-570CH), CT-1570, CT-1701, CT-2500(CT-2570CH) ONLY
   B. 302°F [150°C] MAX. TEMP. RATING
2. INSTALLATION TOOLS:
   A. UL LISTED AND CSA CERTIFIED:
      CT-100A, CT-200, CT-600-A (CT-570CH)
      CT-1570, CT-1701, CT-2500(CT-2570CH)
   B. PANDUIT APPROVED: CT-160, CT-260
3. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ [7,1 $^{+0,8}_{-0}$]
4. MATERIAL:
   A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED
5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

LISTED 587H E52164

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
12	1-23-23	JHNU	JHNU	MRWA	REVISED NOTE 1A TO SPECIFY WIRE RANGE, TOOLS	128528
11	12-15-17	JEH	SKB	JADE	CORRECTED NOTE 1 WAS 12-10 AWG [4.0-6,0 mm²]	019893
10	08.30.12	JBN	LCA	VMB	REVISED NOTE #6A. REVISED INSTALLATION TOOLS NOTE. UPDATED DRAWING TO CURRENT STANDARD. ADDED METRIC EQUIVALENTS.	A41188

TITLE

RING TERMINALS, NON-INSULATED, #12-10

CUSTOMER DRAWING

ITEM REVISION NAME: N41188BB/12

DATASET FILE NAME: N41188BB_DC/12A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.x ± .1 [2.54] .xxx ± .005 [.13]

.xx ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

PANDUIT™

MATERIAL: SEE NOTES

DRAWING NUMBER: A41188

DRAWN BY	DATE	CHK	SCALE	SHEET	SIZE
FES	-	LCA	N.T.S.	SHEET 1 OF 1	A